

Nvector Documentation for Python

Release 0.7.6

Kenneth Gade and Per A. Brodtkorb

Dec 18, 2020

CONTENTS:

1	Introduction	3
1.1	What is nvector?	3
1.1.1	Description	3
1.2	How the documentation is organized	3
2	Tutorials	5
2.1	Install guide	5
2.1.1	Install nvector	5
2.1.2	Verifying installation	5
2.2	Getting Started	6
2.2.1	Example 1: “A and B to delta”	6
2.2.2	Example 2: “B and delta to C”	7
2.2.3	Example 3: “ECEF-vector to geodetic latitude”	8
2.2.4	Example 4: “Geodetic latitude to ECEF-vector”	9
2.2.5	Example 5: “Surface distance”	9
2.2.6	Example 6 “Interpolated position”	10
2.2.7	Example 7: “Mean position”	11
2.2.8	Example 8: “A and azimuth/distance to B”	11
2.2.9	Example 9: “Intersection of two paths”	12
2.2.10	Example 10: “Cross track distance”	13
2.3	Functional examples	13
2.3.1	Example 1: “A and B to delta”	14
2.3.2	Example 2: “B and delta to C”	15
2.3.3	Example 3: “ECEF-vector to geodetic latitude”	16
2.3.4	Example 4: “Geodetic latitude to ECEF-vector”	17
2.3.5	Example 5: “Surface distance”	17
2.3.6	Example 6 “Interpolated position”	18
2.3.7	Example 7: “Mean position”	19
2.3.8	Example 8: “A and azimuth/distance to B”	19
2.3.9	Example 9: “Intersection of two paths”	20
2.3.10	Example 10: “Cross track distance”	21
2.4	What to read next	22
2.4.1	Finding documentation	22
2.4.2	How the documentation is organized	22
2.4.3	How documentation is updated	23
3	How-to guides	25
3.1	Contributing	25
3.1.1	Contribute a patch	25
4	Topics guides	27
5	Reference nvector package	29
5.1	Object Oriented interface to Geodesic functions	29
5.1.1	nvector.objects.delta_E	29

5.1.2	nvector.objects.delta_N	31
5.1.3	nvector.objects.delta_L	31
5.1.4	nvector.objects.diff_positions	31
5.1.5	nvector.objects.ECEFvector	32
5.1.6	nvector.objects.FrameB	34
5.1.7	nvector.objects.FrameE	36
5.1.8	nvector.objects.FrameN	37
5.1.9	nvector.objects.FrameL	38
5.1.10	nvector.objects.GeoPath	39
5.1.11	nvector.objects.GeoPoint	43
5.1.12	nvector.objects.Nvector	44
5.1.13	nvector.objects.Pvector	45
5.2	Geodesic functions	46
5.2.1	nvector.core.closest_point_on_great_circle	47
5.2.2	nvector.core.cross_track_distance	48
5.2.3	nvector.core.euclidean_distance	49
5.2.4	nvector.core.great_circle_distance	50
5.2.5	nvector.core.great_circle_normal	52
5.2.6	nvector.core.interpolate	52
5.2.7	nvector.core.intersect	52
5.2.8	nvector.core.lat_lon2n_E	53
5.2.9	nvector.core.mean_horizontal_position	54
5.2.10	nvector.core.n_E2lat_lon	55
5.2.11	nvector.core.n_EB_E2p_EB_E	55
5.2.12	nvector.core.p_EB_E2n_EB_E	56
5.2.13	nvector.core.n_EA_E_and_n_EB_E2p_AB_E	57
5.2.14	nvector.core.n_EA_E_and_p_AB_E2n_EB_E	59
5.2.15	nvector.core.n_EA_E_and_n_EB_E2azimuth	59
5.2.16	nvector.core.n_EA_E_distance_and_azimuth2n_EB_E	59
5.2.17	nvector.core.on_great_circle	60
5.2.18	nvector.core.on_great_circle_path	62
5.3	Rotation matrices and angles	63
5.3.1	nvector.rotation.E_rotation	64
5.3.2	nvector.rotation.n_E2R_EN	64
5.3.3	nvector.rotation.n_E_and_wa2R_EL	65
5.3.4	nvector.rotation.R_EL2n_E	65
5.3.5	nvector.rotation.R_EN2n_E	65
5.3.6	nvector.rotation.R2xyz	66
5.3.7	nvector.rotation.R2zyx	66
5.3.8	nvector.rotation.xyz2R	67
5.3.9	nvector.rotation.zyx2R	67
5.4	Utility functions	68
5.4.1	nvector.util.deg	69
5.4.2	nvector.util.mdot	69
5.4.3	nvector.util.nthroot	70
5.4.4	nvector.util.rad	71
5.4.5	nvector.util.get_ellipsoid	71
5.4.6	nvector.util.select_ellipsoid	72
5.4.7	nvector.util.unit	73
A	Changelog	75
A.1	Version 0.7.6, December 18, 2020	75
A.2	Version 0.7.5, December 12, 2020	76
A.3	Version 0.7.4, June 4, 2019	78
A.4	Version 0.7.3, June 4, 2019	78
A.5	Version 0.7.0, June 2, 2019	78
A.6	Version 0.6.0, December 9, 2018	79
A.7	Version 0.5.2, March 7, 2017	80

A.8	Version 0.5.1, March 5, 2017	80
A.9	Version 0.4.1, January 19, 2016	81
A.10	Version 0.1.3, January 1, 2016	82
A.11	Version 0.1.1, January 1, 2016	83
B	Developers	85
C	License	87
D	Acknowledgments	89
	Bibliography	91
	Index	93

This is the documentation of **nvector** version 0.7.6 for Python released Dec 18, 2020.

Bleeding edge available at: <https://github.com/pbrod/nvector>.

Official releases are available at: <http://pypi.python.org/pypi/nvector>.

Official homepage are available at: <http://www.navlab.net/nvector/>

INTRODUCTION

1.1 What is nvector?

The nvector library is a suite of tools written in Python to solve geographical position calculations. Currently the following operations are implemented:

- Calculate the surface distance between two geographical positions.
- Convert positions given in one reference frame into another reference frame.
- Find the destination point given start point, azimuth/bearing and distance.
- Find the mean position (center/midpoint) of several geographical positions.
- Find the intersection between two paths.
- Find the cross track distance between a path and a position.

Using n-vector, the calculations become simple and non-singular. Full accuracy is achieved for any global position (and for any distance).

1.1.1 Description

In this library, we represent position with an “n-vector”, which is the normal vector to the Earth model (the same reference ellipsoid that is used for latitude and longitude). When using n-vector, all Earth-positions are treated equally, and there is no need to worry about singularities or discontinuities. An additional benefit with using n-vector is that many position calculations can be solved with simple vector algebra (e.g. dot product and cross product).

Converting between n-vector and latitude/longitude is unambiguous and easy using the provided functions.

`n_E` is n-vector in the program code, while in documents we use `nE`. `E` denotes an Earth-fixed coordinate frame, and it indicates that the three components of n-vector are along the three axes of `E`. More details about the notation and reference frames can be found in the [documentation](#).¹

1.2 How the documentation is organized

Nvector has a lot of documentation. A high-level overview of how it's organized will help you know where to look for certain things:

- *[Tutorials](#)* take you by the hand through a series of typical usecases on how to use it. Start here if you're new to nvector.
- *[Topic guides](#)* discuss key topics and concepts at a fairly high level and provide useful background information and explanation.

¹ https://www.navlab.net/nvector/#vector_symbols

- *Reference guides* contain technical reference for APIs and other aspects of nvector's machinery. They describe how it works and how to use it but assume that you have a basic understanding of key concepts.
- *How-to guides* are recipes. They guide you through the steps involved in addressing key problems and use-cases. They are more advanced than tutorials and assume some knowledge of how nvector works.

TUTORIALS

The pages in this section of the documentation are aimed at the newcomer to nvector. They're designed to help you get started quickly, and show how easy it is to work with nvector as a developer who wants to customise it and get it working according to their own requirements.

These tutorials take you step-by-step through some key aspects of this work. They're not intended to explain the *topics in depth*, or provide *reference material*, but they will leave you with a good idea of what it's possible to achieve in just a few steps, and how to go about it.

Once you're familiar with the basics presented in these tutorials, you'll find the more in-depth coverage of the same topics in the *How-to* section.

The tutorials follow a logical progression, starting from installation of nvector and the creation of a brand new project, and build on each other, so it's recommended to work through them in the order presented here.

2.1 Install guide

Before you can use nvector, you'll need to get it installed. This guide will guide you through a simple installation that'll work while you walk through the introduction.

2.1.1 Install nvector

If you have pip installed and are online, then simply type:

```
$ pip install nvector
```

to get the latest stable version. Using pip also has the advantage that all requirements are automatically installed.

You can download nvector and all dependencies to a folder "pkg", by the following:

```
$ pip install --download=pkg nvector
```

To install the downloaded nvector, just type:

```
$ pip install --no-index --find-links=pkg nvector
```

2.1.2 Verifying installation

To verify that nvector can be seen by Python, type `python` from your shell. Then at the Python prompt, try to import nvector:

```
>>> import nvector as nv
>>> print(nv.__version__)
0.7.6
```

To test if the toolbox is working correctly paste the following in an interactive python session:

```
import nvector as nv
nv.test('--doctest-modules')
```

or


```
$ py.test --pyargs nvector --doctest-modules
```

at the command prompt.

2.2 Getting Started

Below the object-oriented solution to some common geodesic problems are given. In the first example the functional solution is also given. The functional solutions to the remaining problems can be found in the [functional examples](#) section of the tutorial.

2.2.1 Example 1: “A and B to delta”



Given two positions, A and B as latitudes, longitudes and depths relative to Earth, E.

Find the exact vector between the two positions, given in meters north, east, and down, and find the direction (azimuth) to B, relative to north. Assume WGS-84 ellipsoid. The given depths are from the ellipsoid surface. Use position A to define north, east, and down directions. (Due to the curvature of Earth and different directions to the North Pole, the north, east, and down directions will change (relative to Earth) for different places. A must be outside the poles for the north and east directions to be defined.)

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> wgs84 = nv.FrameE(name='WGS84')
>>> pointA = wgs84.GeoPoint(latitude=1, longitude=2, z=3, degrees=True)
>>> pointB = wgs84.GeoPoint(latitude=4, longitude=5, z=6, degrees=True)
```

Step1: Find p_AB_N (delta decomposed in N).

```
>>> p_AB_N = pointA.delta_to(pointB)
>>> x, y, z = p_AB_N.pvector.ravel()
>>> valtxt = '{0:8.2f}, {1:8.2f}, {2:8.2f}'.format(x, y, z)
>>> 'Ex1: delta north, east, down = {}'.format(valtxt)
'Ex1: delta north, east, down = 331730.23, 332997.87, 17404.27'
```

Step2: Also find the direction (azimuth) to B, relative to north:

```
>>> azimuth = p_AB_N.azimuth_deg
>>> 'azimuth = {0:4.2f} deg'.format(azimuth)
'azimuth = 45.11 deg'
```

Functional Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import rad, deg
```

```
>>> lat_EA, lon_EA, z_EA = rad(1), rad(2), 3
>>> lat_EB, lon_EB, z_EB = rad(4), rad(5), 6
```

Step1: Convert to n-vectors:

```
>>> n_EA_E = nv.lat_lon2n_E(lat_EA, lon_EA)
>>> n_EB_E = nv.lat_lon2n_E(lat_EB, lon_EB)
```

Step2: Find p_AB_E (delta decomposed in E).WGS-84 ellipsoid is default:

```
>>> p_AB_E = nv.n_EA_E_and_n_EB_E2p_AB_E(n_EA_E, n_EB_E, z_EA, z_EB)
```

Step3: Find R_EN for position A:

```
>>> R_EN = nv.n_E2R_EN(n_EA_E)
```

Step4: Find p_AB_N (delta decomposed in N).

```
>>> p_AB_N = np.dot(R_EN.T, p_AB_E).ravel()
>>> valtxt = '{0:8.2f}, {1:8.2f}, {2:8.2f}'.format(*p_AB_N)
>>> 'Ex1: delta north, east, down = {}'.format(valtxt)
'Ex1: delta north, east, down = 331730.23, 332997.87, 17404.27'
```

Step5: Also find the direction (azimuth) to B, relative to north:

```
>>> azimuth = np.arctan2(p_AB_N[1], p_AB_N[0])
>>> 'azimuth = {0:4.2f} deg'.format(deg(azimuth))
'azimuth = 45.11 deg'
```

See also [Example 1 at www.navlab.net](http://www.navlab.net)²

2.2.2 Example 2: “B and delta to C”

A radar or sonar attached to a vehicle B (Body coordinate frame) measures the distance and direction to an object C. We assume that the distance and two angles (typically bearing and elevation relative to B) are already combined to the vector p_{BC_B} (i.e. the vector from B to C, decomposed in B). The position of B is given as n_{EB_E} and z_{EB} , and the orientation (attitude) of B is given as R_{NB} (this rotation matrix can be found from roll/pitch/yaw by using $zyx2R$).

Find the exact position of object C as n-vector and depth (n_{EC_E} and z_{EC}), assuming Earth ellipsoid with semi-major axis a and flattening f . For WGS-72, use $a = 6\,378\,135$ m and $f = 1/298.26$.

Solution:

² http://www.navlab.net/nvector/#example_1

```
>>> import numpy as np
>>> import nvector as nv
>>> wgs72 = nv.FrameE(name='WGS72')
>>> wgs72 = nv.FrameE(a=6378135, f=1.0/298.26)
```

Step 1: Position and orientation of B is given 400m above E:

```
>>> n_EB_E = wgs72.Nvector(nv.unit([[1], [2], [3]]), z=-400)
>>> frame_B = nv.FrameB(n_EB_E, yaw=10, pitch=20, roll=30, degrees=True)
```

Step 2: Delta BC decomposed in B

```
>>> p_BC_B = frame_B.Pvector(np.r_[3000, 2000, 100].reshape((-1, 1)))
```

Step 3: Decompose delta BC in E

```
>>> p_BC_E = p_BC_B.to_ecef_vector()
```


Step 4: Find point C by adding delta BC to EB

```
>>> p_EB_E = n_EB_E.to_ecef_vector()
>>> p_EC_E = p_EB_E + p_BC_E
>>> pointC = p_EC_E.to_geo_point()
```

```
>>> lat, lon, z = pointC.latlon_deg
>>> msg = 'Ex2: PosC: lat, lon = {:.4.2f}, {:.4.2f} deg, height = {:.4.2f} m'
>>> msg.format(lat, lon, -z)
'Ex2: PosC: lat, lon = 53.33, 63.47 deg, height = 406.01 m'
```

See also [Example 2 at www.navlab.net](http://www.navlab.net)³

2.2.3 Example 3: “ECEF-vector to geodetic latitude”

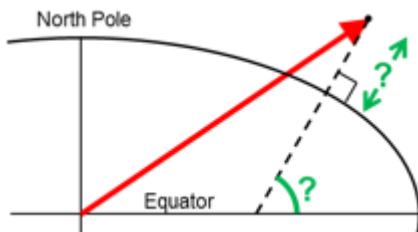

Position B is given as an “ECEF-vector” p_{EB_E} (i.e. a vector from E, the center of the Earth, to B, decomposed in E). Find the geodetic latitude, longitude and height (lat_{EB} , lon_{EB} and h_{EB}), assuming WGS-84 ellipsoid.

Solution:


```
>>> import numpy as np
>>> import nvector as nv
>>> wgs84 = nv.FrameE(name='WGS84')
>>> position_B = 6371e3 * np.vstack((0.9, -1, 1.1)) # m
>>> p_EB_E = wgs84.ECEFvector(position_B)
>>> pointB = p_EB_E.to_geo_point()
```

```
>>> lat, lon, z = pointB.latlon_deg
>>> msg = 'Ex3: Pos B: lat, lon = {:.4.2f}, {:.4.2f} deg, height = {:.9.2f} m'
>>> msg.format(lat, lon, -z)
'Ex3: Pos B: lat, lon = 39.38, -48.01 deg, height = 4702059.83 m'
```

³ http://www.navlab.net/nvector/#example_2

See also [Example 3 at www.navlab.net](http://www.navlab.net/example_3)⁴

2.2.4 Example 4: “Geodetic latitude to ECEF-vector”

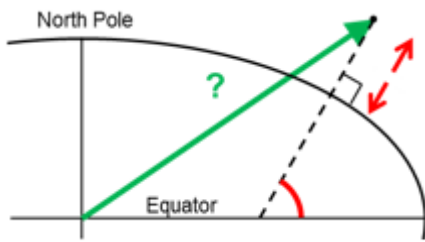

Geodetic latitude, longitude and height are given for position B as `latEB`, `lonEB` and `hEB`, find the ECEF-vector for this position, `p_EB_E`.


Solution:

```
>>> import nvector as nv
>>> wgs84 = nv.FrameE(name='WGS84')
>>> pointB = wgs84.GeoPoint(latitude=1, longitude=2, z=-3, degrees=True)
>>> p_EB_E = pointB.to_ecef_vector()
```

```
>>> 'Ex4: p_EB_E = {} m'.format(p_EB_E.pvector.ravel().tolist())
'Ex4: p_EB_E = [6373290.277218279, 222560.20067473652, 110568.82718178593] m'
```

See also [Example 4 at www.navlab.net](http://www.navlab.net/example_4)⁵

2.2.5 Example 5: “Surface distance”



Find the surface distance `sAB` (i.e. great circle distance) between two positions A and B. The heights of A and B are ignored, i.e. if they don't have zero height, we seek the distance between the points that are at the surface of the Earth, directly above/below A and B. The Euclidean distance (chord length) `dAB` should also be found. Use Earth radius 6371e3 m. Compare the results with exact calculations for the WGS-84 ellipsoid.

Solution for a sphere:

```
>>> import numpy as np
>>> import nvector as nv
>>> frame_E = nv.FrameE(a=6371e3, f=0)
>>> positionA = frame_E.GeoPoint(latitude=88, longitude=0, degrees=True)
>>> positionB = frame_E.GeoPoint(latitude=89, longitude=-170, degrees=True)
```

```
>>> s_AB, _azia, _azib = positionA.distance_and_azimuth(positionB)
>>> p_AB_E = positionB.to_ecef_vector() - positionA.to_ecef_vector()
>>> d_AB = p_AB_E.length
```

⁴ http://www.navlab.net/nvector/#example_3

⁵ http://www.navlab.net/nvector/#example_4

```
>>> msg = 'Ex5: Great circle and Euclidean distance = {}'
>>> msg = msg.format('{:5.2f} km, {:5.2f} km')
>>> msg.format(s_AB / 1000, d_AB / 1000)
'Ex5: Great circle and Euclidean distance = 332.46 km, 332.42 km'
```

Alternative sphere solution:


```
>>> path = nv.GeoPath(positionA, positionB)
>>> s_AB2 = path.track_distance(method='greatcircle')
>>> d_AB2 = path.track_distance(method='euclidean')
>>> msg.format(s_AB2 / 1000, d_AB2 / 1000)
'Ex5: Great circle and Euclidean distance = 332.46 km, 332.42 km'
```

Exact solution for the WGS84 ellipsoid:

```
>>> wgs84 = nv.FrameE(name='WGS84')
>>> point1 = wgs84.GeoPoint(latitude=88, longitude=0, degrees=True)
>>> point2 = wgs84.GeoPoint(latitude=89, longitude=-170, degrees=True)
>>> s_12, _azi1, _azi2 = point1.distance_and_azimuth(point2)
```

```
>>> p_12_E = point2.to_ecef_vector() - point1.to_ecef_vector()
>>> d_12 = p_12_E.length
>>> msg = 'Ellipsoidal and Euclidean distance = {:5.2f} km, {:5.2f} km'
>>> msg.format(s_12 / 1000, d_12 / 1000)
'Ellipsoidal and Euclidean distance = 333.95 km, 333.91 km'
```

See also [Example 5 at www.navlab.net](http://www.navlab.net)⁶

2.2.6 Example 6 “Interpolated position”

Given the position of B at time t_0 and t_1 , $n_{EB_E}(t_0)$ and $n_{EB_E}(t_1)$.

Find an interpolated position at time t_i , $n_{EB_E}(t_i)$. All positions are given as n-vectors.

Solution:

```
>>> import nvector as nv
>>> wgs84 = nv.FrameE(name='WGS84')
>>> n_EB_E_t0 = wgs84.GeoPoint(89, 0, degrees=True).to_nvector()
>>> n_EB_E_t1 = wgs84.GeoPoint(89, 180, degrees=True).to_nvector()
>>> path = nv.GeoPath(n_EB_E_t0, n_EB_E_t1)
```

```
>>> t0 = 10.
>>> t1 = 20.
>>> ti = 16. # time of interpolation
>>> ti_n = (ti - t0) / (t1 - t0) # normalized time of interpolation
```

```
>>> g_EB_E_ti = path.interpolate(ti_n).to_geo_point()
```

⁶ http://www.navlab.net/nvector/#example_5


```
>>> lat_ti, lon_ti, z_ti = g_EB_E_ti.latlon_deg
>>> msg = 'Ex6, Interpolated position: lat, lon = {:.2f} deg, {:.2f} deg'
>>> msg.format(lat_ti, lon_ti)
'Ex6, Interpolated position: lat, lon = 89.8 deg, 180.0 deg'
```

See also [Example 6 at www.navlab.net](http://www.navlab.net)⁷

2.2.7 Example 7: “Mean position”




Three positions A, B, and C are given as n-vectors n_{EA_E} , n_{EB_E} , and n_{EC_E} . Find the mean position, M, given as n_{EM_E} . Note that the calculation is independent of the depths of the positions.

Solution:

```
>>> import nvector as nv
>>> points = nv.GeoPoint(latitude=[90, 60, 50],
...                       longitude=[0, 10, -20], degrees=True)
>>> nvectors = points.to_nvector()
>>> n_EM_E = nvectors.mean()
>>> g_EM_E = n_EM_E.to_geo_point()
>>> lat, lon = g_EM_E.latitude_deg, g_EM_E.longitude_deg
>>> msg = 'Ex7: Pos M: lat, lon = {:.4.2f}, {:.4.2f} deg'
>>> msg.format(lat, lon)
'Ex7: Pos M: lat, lon = 67.24, -6.92 deg'
```

See also [Example 7 at www.navlab.net](http://www.navlab.net)⁸

2.2.8 Example 8: “A and azimuth/distance to B”



We have an initial position A, direction of travel given as an azimuth (bearing) relative to north (clockwise), and finally the distance to travel along a great circle given as s_{AB} . Use Earth radius $6371e3$ m to find the destination point B.

In geodesy this is known as “The first geodetic problem” or “The direct geodetic problem” for a sphere, and we see that this is similar to [Example 2](#)⁹, but now the delta is given as an azimuth and a great circle distance. (“The second/inverse geodetic problem” for a sphere is already solved in [Examples 1](#)¹⁰ and [5](#)¹¹.)

⁷ http://www.navlab.net/nvector/#example_6

⁸ http://www.navlab.net/nvector/#example_7

⁹ http://www.navlab.net/nvector/#example_2

¹⁰ http://www.navlab.net/nvector/#example_1


¹¹ http://www.navlab.net/nvector/#example_5

Solution:

```
>>> import nvector as nv
>>> frame = nv.FrameE(a=6371e3, f=0)
>>> pointA = frame.GeoPoint(latitude=80, longitude=-90, degrees=True)
>>> pointB, _azimuthb = pointA.displace(distance=1000, azimuth=200,
↳degrees=True)
>>> lat, lon = pointB.latitude_deg, pointB.longitude_deg
```

```
>>> msg = 'Ex8, Destination: lat, lon = {:4.2f} deg, {:4.2f} deg'
>>> msg.format(lat, lon)
'Ex8, Destination: lat, lon = 79.99 deg, -90.02 deg'
```

See also [Example 8 at www.navlab.net](http://www.navlab.net)¹²

2.2.9 Example 9: “Intersection of two paths”

Define a path from two given positions (at the surface of a spherical Earth), as the great circle that goes through the two points.

Path A is given by A1 and A2, while path B is given by B1 and B2.

Find the position C where the two great circles intersect.

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> pointA1 = nv.GeoPoint(10, 20, degrees=True)
>>> pointA2 = nv.GeoPoint(30, 40, degrees=True)
>>> pointB1 = nv.GeoPoint(50, 60, degrees=True)
>>> pointB2 = nv.GeoPoint(70, 80, degrees=True)
>>> pathA = nv.GeoPath(pointA1, pointA2)
>>> pathB = nv.GeoPath(pointB1, pointB2)


>>> pointC = pathA.intersect(pathB)
>>> np.allclose(pathA.on_path(pointC), pathB.on_path(pointC))
True
>>> np.allclose(pathA.on_great_circle(pointC),
...             pathB.on_great_circle(pointC))
True
>>> pointC = pointC.to_geo_point()
>>> lat, lon = pointC.latitude_deg, pointC.longitude_deg
>>> msg = 'Ex9, Intersection: lat, lon = {:4.2f}, {:4.2f} deg'
>>> msg.format(lat, lon)
'Ex9, Intersection: lat, lon = 40.32, 55.90 deg'
```

See also [Example 9 at www.navlab.net](http://www.navlab.net)¹³

¹² http://www.navlab.net/nvector/#example_8

¹³ http://www.navlab.net/nvector/#example_9

2.2.10 Example 10: “Cross track distance”



Path A is given by the two positions A1 and A2 (similar to the previous example).

Find the cross track distance s_{xt} between the path A (i.e. the great circle through A1 and A2) and the position B (i.e. the shortest distance at the surface, between the great circle and B).

Also find the Euclidean distance d_{xt} between B and the plane defined by the great circle. Use Earth radius 6371e3.

Finally, find the intersection point on the great circle and determine if it is between position A1 and A2.

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> frame = nv.FrameE(a=6371e3, f=0)
>>> pointA1 = frame.GeoPoint(0, 0, degrees=True)
>>> pointA2 = frame.GeoPoint(10, 0, degrees=True)
>>> pointB = frame.GeoPoint(1, 0.1, degrees=True)
>>> pathA = nv.GeoPath(pointA1, pointA2)
```

```
>>> s_xt = pathA.cross_track_distance(pointB, method='greatcircle')
>>> d_xt = pathA.cross_track_distance(pointB, method='euclidean')
```

```
>>> val_txt = '{:4.2f} km, {:4.2f} km'.format(s_xt/1000, d_xt/1000)
>>> 'Ex10: Cross track distance: s_xt, d_xt = {}'.format(val_txt)
'Ex10: Cross track distance: s_xt, d_xt = 11.12 km, 11.12 km'
```

```
>>> pointC = pathA.closest_point_on_great_circle(pointB)
>>> np.allclose(pathA.on_path(pointC), True)
True
```

See also [Example 10 at www.navlab.net](http://www.navlab.net)¹⁴

2.3 Functional examples

Below the functional solution to some common geodesic problems are given. In the first example the object-oriented solution is also given. The object-oriented solutions to the remaining problems can be found in the *getting started* section of the tutorial.

¹⁴ http://www.navlab.net/nvector/#example_10

2.3.1 Example 1: “A and B to delta”



Given two positions, A and B as latitudes, longitudes and depths relative to Earth, E.

Find the exact vector between the two positions, given in meters north, east, and down, and find the direction (azimuth) to B, relative to north. Assume WGS-84 ellipsoid. The given depths are from the ellipsoid surface. Use position A to define north, east, and down directions. (Due to the curvature of Earth and different directions to the North Pole, the north, east, and down directions will change (relative to Earth) for different places. A must be outside the poles for the north and east directions to be defined.)

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import rad, deg
```

```
>>> lat_EA, lon_EA, z_EA = rad(1), rad(2), 3
>>> lat_EB, lon_EB, z_EB = rad(4), rad(5), 6
```

Step1: Convert to n-vectors:

```
>>> n_EA_E = nv.lat_lon2n_E(lat_EA, lon_EA)
>>> n_EB_E = nv.lat_lon2n_E(lat_EB, lon_EB)
```

Step2: Find p_AB_E (delta decomposed in E).WGS-84 ellipsoid is default:

```
>>> p_AB_E = nv.n_EA_E_and_n_EB_E2p_AB_E(n_EA_E, n_EB_E, z_EA, z_EB)
```

Step3: Find R_EN for position A:

```
>>> R_EN = nv.n_E2R_EN(n_EA_E)
```

Step4: Find p_AB_N (delta decomposed in N).

```
>>> p_AB_N = np.dot(R_EN.T, p_AB_E).ravel()
>>> valtxt = '{0:8.2f}, {1:8.2f}, {2:8.2f}'.format(*p_AB_N)
>>> 'Ex1: delta north, east, down = {}'.format(valtxt)
'Ex1: delta north, east, down = 331730.23, 332997.87, 17404.27'
```

Step5: Also find the direction (azimuth) to B, relative to north:

```
>>> azimuth = np.arctan2(p_AB_N[1], p_AB_N[0])
>>> 'azimuth = {0:4.2f} deg'.format(deg(azimuth))
'azimuth = 45.11 deg'
```

OO-Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> wgs84 = nv.FrameE(name='WGS84')
>>> pointA = wgs84.GeoPoint(latitude=1, longitude=2, z=3, degrees=True)
>>> pointB = wgs84.GeoPoint(latitude=4, longitude=5, z=6, degrees=True)
```

Step1: Find p_AB_N (delta decomposed in N).

```
>>> p_AB_N = pointA.delta_to(pointB)
>>> x, y, z = p_AB_N.pvector.ravel()
>>> valtxt = '{0:8.2f}, {1:8.2f}, {2:8.2f}'.format(x, y, z)
>>> 'Ex1: delta north, east, down = {}'.format(valtxt)
'Ex1: delta north, east, down = 331730.23, 332997.87, 17404.27'
```

Step2: Also find the direction (azimuth) to B, relative to north:

```
>>> azimuth = p_AB_N.azimuth_deg
>>> 'azimuth = {0:4.2f} deg'.format(azimuth)
'azimuth = 45.11 deg'
```

See also [Example 1 at www.navlab.net](http://www.navlab.net)¹⁵

2.3.2 Example 2: “B and delta to C”



A radar or sonar attached to a vehicle B (Body coordinate frame) measures the distance and direction to an object C. We assume that the distance and two angles (typically bearing and elevation relative to B) are already combined to the vector p_{BC_B} (i.e. the vector from B to C, decomposed in B). The position of B is given as n_{EB_E} and z_{EB} , and the orientation (attitude) of B is given as R_{NB} (this rotation matrix can be found from roll/pitch/yaw by using `zyx2R`).

Find the exact position of object C as n-vector and depth (n_{EC_E} and z_{EC}), assuming Earth ellipsoid with semi-major axis a and flattening f . For WGS-72, use $a = 6\,378\,135$ m and $f = 1/298.26$.

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import rad, deg
```

A custom reference ellipsoid is given (replacing WGS-84):

```
>>> wgs72 = dict(a=6378135, f=1.0/298.26)
```

Step 1 Position and orientation of B is 400m above E:

```
>>> n_EB_E = nv.unit([[1], [2], [3]]) # unit to get unit length of vector
>>> z_EB = -400
>>> yaw, pitch, roll = rad(10), rad(20), rad(30)
>>> R_NB = nv.zyx2R(yaw, pitch, roll)
```

Step 2: Delta BC decomposed in B

```
>>> p_BC_B = np.r_[3000, 2000, 100].reshape((-1, 1))
```

Step 3: Find R_{EN} :

```
>>> R_EN = nv.n_E2R_EN(n_EB_E)
```

¹⁵ http://www.navlab.net/nvector/#example_1

Step 4: Find R_{EB} , from R_{EN} and R_{NB} :

```
>>> R_EB = np.dot(R_EN, R_NB) # Note: closest frames cancel
```

Step 5: Decompose the delta BC vector in E:

```
>>> p_BC_E = np.dot(R_EB, p_BC_B)
```


Step 6: Find the position of C, using the functions that goes from one

```
>>> n_EC_E, z_EC = nv.n_EA_E_and_p_AB_E2n_EB_E(n_EB_E, p_BC_E, z_EB, **wgs72)
```

```
>>> lat_EC, lon_EC = nv.n_E2lat_lon(n_EC_E)
>>> lat, lon, z = deg(lat_EC), deg(lon_EC), z_EC
>>> msg = 'Ex2: PosC: lat, lon = {:4.2f}, {:4.2f} deg, height = {:4.2f} m'
>>> msg.format(lat[0], lon[0], -z[0])
'Ex2: PosC: lat, lon = 53.33, 63.47 deg, height = 406.01 m'
```

See also [Example 2 at www.navlab.net](http://www.navlab.net)¹⁶

2.3.3 Example 3: “ECEF-vector to geodetic latitude”

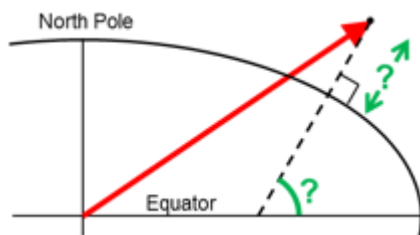

Position B is given as an “ECEF-vector” p_{EB_E} (i.e. a vector from E, the center of the Earth, to B, decomposed in E). Find the geodetic latitude, longitude and height (lat_{EB} , lon_{EB} and h_{EB}), assuming WGS-84 ellipsoid.

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import deg
>>> wgs84 = dict(a=6378137.0, f=1.0/298.257223563)
>>> p_EB_E = 6371e3 * np.vstack((0.9, -1, 1.1)) # m
```

```
>>> n_EB_E, z_EB = nv.p_EB_E2n_EB_E(p_EB_E, **wgs84)
```

```
>>> lat_EB, lon_EB = nv.n_E2lat_lon(n_EB_E)
>>> h = -z_EB
>>> lat, lon = deg(lat_EB), deg(lon_EB)
```


```
>>> msg = 'Ex3: Pos B: lat, lon = {:4.2f}, {:4.2f} deg, height = {:9.2f} m'
>>> msg.format(lat[0], lon[0], h[0])
'Ex3: Pos B: lat, lon = 39.38, -48.01 deg, height = 4702059.83 m'
```

See also [Example 3 at www.navlab.net](http://www.navlab.net)¹⁷

¹⁶ http://www.navlab.net/nvector/#example_2

¹⁷ http://www.navlab.net/nvector/#example_3

2.3.4 Example 4: “Geodetic latitude to ECEF-vector”

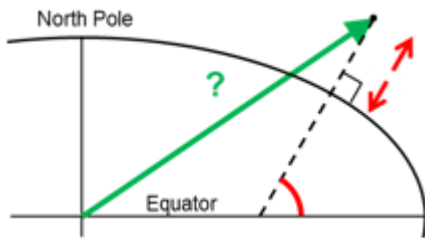

Geodetic latitude, longitude and height are given for position B as lat_{EB} , lon_{EB} and h_{EB} , find the ECEF-vector for this position, p_{EB_E} .


Solution:

```
>>> import nvector as nv
>>> from nvector import rad
>>> wgs84 = dict(a=6378137.0, f=1.0/298.257223563)
>>> lat_EB, lon_EB = rad(1), rad(2)
>>> h_EB = 3
>>> n_EB_E = nv.lat_lon2n_E(lat_EB, lon_EB)
>>> p_EB_E = nv.n_EB_E2p_EB_E(n_EB_E, -h_EB, **wgs84)
```

```
>>> 'Ex4: p_EB_E = {} m'.format(p_EB_E.ravel().tolist())
'Ex4: p_EB_E = [6373290.277218279, 222560.20067473652, 110568.82718178593] m'
```

See also [Example 4 at www.navlab.net](http://www.navlab.net)¹⁸

2.3.5 Example 5: “Surface distance”



Find the surface distance s_{AB} (i.e. great circle distance) between two positions A and B. The heights of A and B are ignored, i.e. if they don't have zero height, we seek the distance between the points that are at the surface of the Earth, directly above/below A and B. The Euclidean distance (chord length) d_{AB} should also be found. Use Earth radius 6371e3 m. Compare the results with exact calculations for the WGS-84 ellipsoid.

Solution for a sphere:

```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import rad
```

```
>>> n_EA_E = nv.lat_lon2n_E(rad(88), rad(0))
>>> n_EB_E = nv.lat_lon2n_E(rad(89), rad(-170))
```

```
>>> r_Earth = 6371e3 # m, mean Earth radius
>>> s_AB = nv.great_circle_distance(n_EA_E, n_EB_E, radius=r_Earth)[0]
>>> d_AB = nv.euclidean_distance(n_EA_E, n_EB_E, radius=r_Earth)[0]
```

¹⁸ http://www.navlab.net/nvector/#example_4

```
>>> msg = 'Ex5: Great circle and Euclidean distance = {}'
>>> msg = msg.format('{:5.2f} km, {:5.2f} km')
>>> msg.format(s_AB / 1000, d_AB / 1000)
'Ex5: Great circle and Euclidean distance = 332.46 km, 332.42 km'
```


Exact solution for the WGS84 ellipsoid:

```
>>> wgs84 = nv.FrameE(name='WGS84')
>>> point1 = wgs84.GeoPoint(latitude=88, longitude=0, degrees=True)
>>> point2 = wgs84.GeoPoint(latitude=89, longitude=-170, degrees=True)
>>> s_12, _azi1, _azi2 = point1.distance_and_azimuth(point2)

>>> p_12_E = point2.to_ecef_vector() - point1.to_ecef_vector()
>>> d_12 = p_12_E.length
>>> msg = 'Ellipsoidal and Euclidean distance = {:5.2f} km, {:5.2f} km'
>>> msg.format(s_12 / 1000, d_12 / 1000)
'Ellipsoidal and Euclidean distance = 333.95 km, 333.91 km'
```

See also [Example 5 at www.navlab.net](http://www.navlab.net)¹⁹

2.3.6 Example 6 “Interpolated position”



Given the position of B at time t_0 and t_1 , $n_{EB_E}(t_0)$ and $n_{EB_E}(t_1)$.

Find an interpolated position at time t_i , $n_{EB_E}(t_i)$. All positions are given as n-vectors.

Solution:

```
>>> import nvector as nv
>>> from nvector import rad, deg
>>> n_EB_E_t0 = nv.lat_lon2n_E(rad(89), rad(0))
>>> n_EB_E_t1 = nv.lat_lon2n_E(rad(89), rad(180))

>>> t0 = 10.
>>> t1 = 20.
>>> ti = 16. # time of interpolation
>>> ti_n = (ti - t0) / (t1 - t0) # normalized time of interpolation

>>> n_EB_E_ti = nv.unit(n_EB_E_t0 + ti_n * (n_EB_E_t1 - n_EB_E_t0))
>>> lat_EB_ti, lon_EB_ti = nv.n_E2lat_lon(n_EB_E_ti)

>>> lat_ti, lon_ti = deg(lat_EB_ti), deg(lon_EB_ti)
>>> msg = 'Ex6, Interpolated position: lat, lon = {:2.1f} deg, {:2.1f} deg'
>>> msg.format(lat_ti[0], lon_ti[0])
'Ex6, Interpolated position: lat, lon = 89.8 deg, 180.0 deg'
```

See also [Example 6 at www.navlab.net](http://www.navlab.net)²⁰

¹⁹ http://www.navlab.net/nvector/#example_5

²⁰ http://www.navlab.net/nvector/#example_6

2.3.7 Example 7: “Mean position”



Three positions A, B, and C are given as n-vectors n_{EA_E} , n_{EB_E} , and n_{EC_E} . Find the mean position, M, given as n_{EM_E} . Note that the calculation is independent of the depths of the positions.

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import rad, deg
```

```
>>> n_EA_E = nv.lat_lon2n_E(rad(90), rad(0))
>>> n_EB_E = nv.lat_lon2n_E(rad(60), rad(10))
>>> n_EC_E = nv.lat_lon2n_E(rad(50), rad(-20))
```

```
>>> n_EM_E = nv.unit(n_EA_E + n_EB_E + n_EC_E)
```


or

```
>>> n_EM_E = nv.mean_horizontal_position(np.hstack((n_EA_E, n_EB_E, n_EC_E)))
```

```
>>> lat, lon = nv.n_E2lat_lon(n_EM_E)
>>> lat, lon = deg(lat), deg(lon)
>>> msg = 'Ex7: Pos M: lat, lon = {:4.2f}, {:4.2f} deg'
>>> msg.format(lat[0], lon[0])
'Ex7: Pos M: lat, lon = 67.24, -6.92 deg'
```

See also [Example 7 at www.navlab.net](http://www.navlab.net)²¹

2.3.8 Example 8: “A and azimuth/distance to B”



We have an initial position A, direction of travel given as an azimuth (bearing) relative to north (clockwise), and finally the distance to travel along a great circle given as s_{AB} . Use Earth radius 6371e3 m to find the destination point B.

In geodesy this is known as “The first geodetic problem” or “The direct geodetic problem” for a sphere, and we see that this is similar to [Example 2](#)²², but now the delta is given as an azimuth and a great circle distance. (“The second/inverse geodetic problem” for a sphere is already solved in [Examples 1](#)²³ and [5](#)²⁴.)

²¹ http://www.navlab.net/nvector/#example_7

²² http://www.navlab.net/nvector/#example_2

²³ http://www.navlab.net/nvector/#example_1

²⁴ http://www.navlab.net/nvector/#example_5


Solution:

```
>>> import nvector as nv
>>> from nvector import rad, deg
>>> lat, lon = rad(80), rad(-90)
```

```
>>> n_EA_E = nv.lat_lon2n_E(lat, lon)
>>> azimuth = rad(200)
>>> s_AB = 1000.0 # [m]
>>> r_earth = 6371e3 # [m], mean earth radius
```

```
>>> distance_rad = s_AB / r_earth
>>> n_EB_E = nv.n_EA_E_distance_and_azimuth2n_EB_E(n_EA_E, distance_rad,
↳ azimuth)
>>> lat_EB, lon_EB = nv.n_E2lat_lon(n_EB_E)
>>> lat, lon = deg(lat_EB), deg(lon_EB)
>>> msg = 'Ex8, Destination: lat, lon = {:.42f} deg, {:.42f} deg'
>>> msg.format(lat[0], lon[0])
'Ex8, Destination: lat, lon = 79.99 deg, -90.02 deg'
```

See also [Example 8 at www.navlab.net](http://www.navlab.net)²⁵

2.3.9 Example 9: “Intersection of two paths”

Define a path from two given positions (at the surface of a spherical Earth), as the great circle that goes through the two points.

Path A is given by A1 and A2, while path B is given by B1 and B2.

Find the position C where the two great circles intersect.

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import rad, deg
```

```
>>> n_EA1_E = nv.lat_lon2n_E(rad(10), rad(20))
>>> n_EA2_E = nv.lat_lon2n_E(rad(30), rad(40))
>>> n_EB1_E = nv.lat_lon2n_E(rad(50), rad(60))
>>> n_EB2_E = nv.lat_lon2n_E(rad(70), rad(80))
```

```
>>> n_EC_E = nv.unit(np.cross(np.cross(n_EA1_E, n_EA2_E, axis=0),
...                               np.cross(n_EB1_E, n_EB2_E, axis=0),
...                               axis=0))
>>> n_EC_E *= np.sign(np.dot(n_EC_E.T, n_EA1_E))
```

or alternatively

²⁵ http://www.navlab.net/nvector/#example_8

```
>>> path_a, path_b = (n_EA1_E, n_EA2_E), (n_EB1_E, n_EB2_E)
>>> n_EC_E = nv.intersect(path_a, path_b)
```


```
>>> lat_EC, lon_EC = nv.n_E2lat_lon(n_EC_E)
```

```
>>> lat, lon = deg(lat_EC), deg(lon_EC)
>>> msg = 'Ex9, Intersection: lat, lon = {:.2f}, {:.2f} deg'
>>> msg.format(lat[0], lon[0])
'Ex9, Intersection: lat, lon = 40.32, 55.90 deg'
```

```
>>> np.allclose(nv.on_great_circle_path(path_a, n_EC_E),
...             nv.on_great_circle_path(path_b, n_EC_E))
True
>>> np.allclose(nv.on_great_circle(path_a, n_EC_E), nv.on_great_circle(path_b,
↪n_EC_E))
True
```

See also [Example 9 at www.navlab.net](http://www.navlab.net)²⁶

2.3.10 Example 10: “Cross track distance”



Path A is given by the two positions A1 and A2 (similar to the previous example).

Find the cross track distance s_{xt} between the path A (i.e. the great circle through A1 and A2) and the position B (i.e. the shortest distance at the surface, between the great circle and B).

Also find the Euclidean distance d_{xt} between B and the plane defined by the great circle. Use Earth radius $6371e3$.

Finally, find the intersection point on the great circle and determine if it is between position A1 and A2.

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import rad, deg
>>> n_EA1_E = nv.lat_lon2n_E(rad(0), rad(0))
>>> n_EA2_E = nv.lat_lon2n_E(rad(10), rad(0))
>>> n_EB_E = nv.lat_lon2n_E(rad(1), rad(0.1))
>>> path = (n_EA1_E, n_EA2_E)
>>> radius = 6371e3 # mean earth radius [m]
>>> s_xt = nv.cross_track_distance(path, n_EB_E, radius=radius)
>>> d_xt = nv.cross_track_distance(path, n_EB_E, method='euclidean',
...                               radius=radius)
```

```
>>> val_txt = '{:.2f} km, {:.2f} km'.format(s_xt[0]/1000, d_xt[0]/1000)
>>> 'Ex10: Cross track distance: s_xt, d_xt = {0}'.format(val_txt)
'Ex10: Cross track distance: s_xt, d_xt = 11.12 km, 11.12 km'
```

²⁶ http://www.navlab.net/nvector/#example_9

```
>>> n_EC_E = nv.closest_point_on_great_circle(path, n_EB_E)
>>> np.allclose(nv.on_great_circle_path(path, n_EC_E, radius), True)
True
```

Alternative solution 2:

```
>>> s_xt2 = nv.great_circle_distance(n_EB_E, n_EC_E, radius)
>>> d_xt2 = nv.euclidean_distance(n_EB_E, n_EC_E, radius)
>>> np.allclose(s_xt, s_xt2), np.allclose(d_xt, d_xt2)
(True, True)
```

Alternative solution 3:

```
>>> c_E = nv.great_circle_normal(n_EA1_E, n_EA2_E)
>>> sin_theta = -np.dot(c_E.T, n_EB_E).ravel()
>>> s_xt3 = np.arcsin(sin_theta) * radius
>>> d_xt3 = sin_theta * radius
>>> np.allclose(s_xt, s_xt3), np.allclose(d_xt, d_xt3)
(True, True)
```

See also [Example 10 at www.navlab.net](http://www.navlab.net/example_10)²⁷

2.4 What to read next

So you’ve read all the *introductory material* and have decided you’d like to keep using nvector. We’ve only just scratched the surface with this intro.

So what’s next?

Well, we’ve always been big fans of learning by doing. At this point you should know enough to start a project of your own and start fooling around. As you need to learn new tricks, come back to the documentation.

We’ve put a lot of effort into making nvector’s documentation useful, easy to read and as complete as possible. The rest of this document explains more about how the documentation works so that you can get the most out of it.

2.4.1 Finding documentation

The nvector library got a *lot* of documentation, so finding what you need can sometimes be tricky. A few good places to start are the search and the genindex.

Or you can just browse around!

2.4.2 How the documentation is organized

The nvector main documentation is broken up into “chunks” designed to fill different needs:

- The *introductory material* is designed for people new to nvector. It doesn’t cover anything in depth, but instead gives a hands on overview of how to use nvector.
- The *topic guides*, on the other hand, dive deep into individual parts of nvector from a theoretical perspective.
- We’ve written a set of *how-to guides* that answer common “How do I . . . ?” questions.
- The guides and how-to’s don’t cover every single class, function, and method available in nvector – that would be overwhelming when you’re trying to learn. Instead, details about individual classes, functions, methods, and modules are kept in the *reference*. This is where you’ll turn to find the details of a particular function or whatever you need.

²⁷ http://www.navlab.net/nvector/#example_10

2.4.3 How documentation is updated

Just as the nvector code base is developed and improved on a daily basis, our documentation is consistently improving. We improve documentation for several reasons:

- To make content fixes, such as grammar/typo corrections.
- To add information and/or examples to existing sections that need to be expanded.
- To document nvector features that aren't yet documented. (The list of such features is shrinking but exists nonetheless.)
- To add documentation for new features as new features get added, or as nvector APIs or behaviors change.

2.4.3.1 In plain text

For offline reading, or just for convenience, you can read the nvector documentation in plain text.

If you're using an official release of nvector, the zipped package (tarball) of the code includes a `docs/` directory, which contains all the documentation for that release.

If you're using the development version of nvector (aka the master branch), the `docs/` directory contains all of the documentation. You can update your Git checkout to get the latest changes.

One low-tech way of taking advantage of the text documentation is by using the Unix `grep` utility to search for a phrase in all of the documentation. For example, this will show you each mention of the phrase "max_length" in any nvector document:

```
$ grep -r max_length /path/to/nvector/docs/
```

2.4.3.2 As HTML, locally

You can get a local copy of the HTML documentation following a few easy steps:

- nvector's documentation uses a system called [Sphinx](http://sphinx-doc.org/)²⁸ to convert from plain text to HTML. You'll need to install Sphinx by either downloading and installing the package from the Sphinx website, or with `pip`:

```
$ pip install Sphinx
```

- Then, just use the included `Makefile` to turn the documentation into HTML:

```
$ cd path/to/nvector/docs
$ make html
```

You'll need [GNU Make](https://www.gnu.org/software/make/)²⁹ installed for this.

If you're on Windows you can alternatively use the included batch file:

```
$ cd path\to\nvector\docs
$ make.bat html
```

- The HTML documentation will be placed in `docs/_build/html`.

²⁸ <http://sphinx-doc.org/>

²⁹ <https://www.gnu.org/software/make/>

2.4.3.3 Using pydoc

The `pydoc` module automatically generates documentation from Python modules. The documentation can be presented as pages of text on the console, served to a Web browser, or saved to HTML files.

For modules, classes, functions and methods, the displayed documentation is derived from the docstring (i.e. the `__doc__` attribute) of the object, and recursively of its documentable members. If there is no docstring, `pydoc` tries to obtain a description from the block of comment lines just above the definition of the class, function or method in the source file, or at the top of the module (see `inspect.getcomments()`).

The built-in function `help()` invokes the online help system in the interactive interpreter, which uses `pydoc` to generate its documentation as text on the console. The same text documentation can also be viewed from outside the Python interpreter by running `pydoc` as a script at the operating system's command prompt. For example, running

```
$ pydoc nvector
```

at a shell prompt will display documentation on the `nvector` module, in a style similar to the manual pages shown by the Unix `man` command. The argument to `pydoc` can be the name of a function, module, or package, or a dotted reference to a class, method, or function within a module or module in a package. If the argument to `pydoc` looks like a path (that is, it contains the path separator for your operating system, such as a slash in Unix), and refers to an existing Python source file, then documentation is produced for that file.

You can also use `pydoc` to start an HTTP server on the local machine that will serve documentation to visiting Web browsers. For example, running

```
$ pydoc -b
```

will start the server and additionally open a web browser to a module index page. Each served page has a navigation bar at the top where you can Get help on an individual item, Search all modules with a keyword in their synopsis line, and go to the Module index, Topics and Keywords pages. To quit the server just type

```
$ quit
```

See also:

Nvector is 100% [Python](https://python.org/)³⁰, so if you're new to [Python](https://python.org/)³¹, you might want to start by getting an idea of what the language is like. Below we have given some pointers to some resources you can use to get acquainted with the language.

If you're new to programming entirely, you might want to start with this [list of Python resources for non-programmers](https://wiki.python.org/moin/BeginnersGuide/NonProgrammers)³²

If you already know a few other languages and want to get up to speed with Python quickly, we recommend [Dive Into Python](https://www.diveinto.org/python3/)³³. If that's not quite your style, there are many other [books about Python](https://wiki.python.org/moin/PythonBooks)³⁴.

³⁰ <https://python.org/>

³¹ <https://python.org/>

³² <https://wiki.python.org/moin/BeginnersGuide/NonProgrammers>

³³ <https://www.diveinto.org/python3/>

³⁴ <https://wiki.python.org/moin/PythonBooks>

HOW-TO GUIDES

Here you'll find short answers to "How do I...?" types of questions. These how-to guides don't cover topics in depth – you'll find that material in the *Topics guides* and the *Reference nvector package*. However, these guides will help you quickly accomplish common tasks using the "best practices".

3.1 Contributing

3.1.1 Contribute a patch

TOPICS GUIDES

This section explains and analyses some key concepts in nvector. It's less concerned with explaining *how to do things* than with helping you understand *how it works*.

REFERENCE NVECTOR PACKAGE

Technical reference material that details functions, modules, and objects included in nvector version 0.7.6, describing what they are and what they do.

5.1 Object Oriented interface to Geodesic functions

<code>delta_E(point_a, point_b)</code>	Returns cartesian delta vector from positions a to b decomposed in E.
<code>delta_N(point_a, point_b)</code>	Returns cartesian delta vector from positions a to b decomposed in N.
<code>delta_L(point_a, point_b[, wander_azimuth])</code>	Returns cartesian delta vector from positions a to b decomposed in L.
<code>diff_positions(*args, **kws)</code>	<code>diff_positions</code> is deprecated, use <code>delta_E</code> instead!
<code>ECEFvector(pvector[, frame, scalar])</code>	Geographical position given as cartesian position vector in frame E
<code>FrameB(point[, yaw, pitch, roll, degrees])</code>	Body frame
<code>FrameE([a, f, name, axes])</code>	Earth-fixed frame
<code>FrameN(point)</code>	North-East-Down frame
<code>FrameL(point[, wander_azimuth])</code>	Local level, Wander azimuth frame
<code>GeoPath(point_a, point_b)</code>	Geographical path between two positions in Frame E
<code>GeoPoint(latitude, longitude[, z, frame, ...])</code>	Geographical position given as latitude, longitude, depth in frame E.
<code>Nvector(normal[, z, frame])</code>	Geographical position given as n-vector and depth in frame E
<code>Pvector(pvector, frame[, scalar])</code>	Geographical position given as cartesian position vector in a frame.

5.1.1 nvector.objects.delta_E

delta_E (*point_a, point_b*)

Returns cartesian delta vector from positions a to b decomposed in E.

Parameters

point_a, point_b: **Nvector, GeoPoint or ECEFvector objects** position a and b, decomposed in E.

Returns

p_ab_E: **ECEFvector** Cartesian position vector(s) from a to b, decomposed in E.

See also:

n_EA_E_and_p_AB_E2n_EB_E

```
p_EB_E2n_EB_E
n_EB_E2p_EB_E.
```

Notes

The calculation is exact, taking the ellipsity of the Earth into account. It is also non-singular as both n-vector and p-vector are non-singular (except for the center of the Earth).

Examples

Example 1: “A and B to delta”



Given two positions, A and B as latitudes, longitudes and depths relative to Earth, E.

Find the exact vector between the two positions, given in meters north, east, and down, and find the direction (azimuth) to B, relative to north. Assume WGS-84 ellipsoid. The given depths are from the ellipsoid surface. Use position A to define north, east, and down directions. (Due to the curvature of Earth and different directions to the North Pole, the north, east, and down directions will change (relative to Earth) for different places. A must be outside the poles for the north and east directions to be defined.)

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> wgs84 = nv.FrameE(name='WGS84')
>>> pointA = wgs84.GeoPoint(latitude=1, longitude=2, z=3, degrees=True)
>>> pointB = wgs84.GeoPoint(latitude=4, longitude=5, z=6, degrees=True)
```

Step1: Find p_AB_N (delta decomposed in N).

```
>>> p_AB_N = pointA.delta_to(pointB)
>>> x, y, z = p_AB_N.pvector.ravel()
>>> valtxt = '{0:8.2f}, {1:8.2f}, {2:8.2f}'.format(x, y, z)
>>> 'Ex1: delta north, east, down = {}'.format(valtxt)
'Ex1: delta north, east, down = 331730.23, 332997.87, 17404.27'
```

Step2: Also find the direction (azimuth) to B, relative to north:

```
>>> azimuth = p_AB_N.azimuth_deg
>>> 'azimuth = {0:4.2f} deg'.format(azimuth)
'azimuth = 45.11 deg'
```

5.1.2 nvector.objects.delta_N

delta_N (*point_a, point_b*)

Returns cartesian delta vector from positions a to b decomposed in N.

Parameters

point_a, point_b: Nvector, GeoPoint or ECEFvector objects position a and b, decomposed in E.

See also:

delta_E, delta_L

5.1.3 nvector.objects.delta_L

delta_L (*point_a, point_b, wander_azimuth=0*)

Returns cartesian delta vector from positions a to b decomposed in L.

Parameters

point_a, point_b: Nvector, GeoPoint or ECEFvector objects position a and b, decomposed in E.

wander_azimuth: real scalar Angle [rad] between the x-axis of L and the north direction.

See also:

delta_E, delta_N

5.1.4 nvector.objects.diff_positions

diff_positions (**args, **kws*)

diff_positions is deprecated, use *delta_E* instead!

Returns cartesian delta vector from positions a to b decomposed in E.

Parameters

point_a, point_b: Nvector, GeoPoint or ECEFvector objects position a and b, decomposed in E.

Returns

p_ab_E: ECEFvector Cartesian position vector(s) from a to b, decomposed in E.

See also:

n_EA_E and p_AB_E2n_EB_E

p_EB_E2n_EB_E

n_EB_E2p_EB_E.

Notes

The calculation is exact, taking the ellipsity of the Earth into account. It is also non-singular as both n-vector and p-vector are non-singular (except for the center of the Earth).

Examples

Example 1: “A and B to delta”



Given two positions, A and B as latitudes, longitudes and depths relative to Earth, E.

Find the exact vector between the two positions, given in meters north, east, and down, and find the direction (azimuth) to B, relative to north. Assume WGS-84 ellipsoid. The given depths are from the ellipsoid surface. Use position A to define north, east, and down directions. (Due to the curvature of Earth and different directions to the North Pole, the north, east, and down directions will change (relative to Earth) for different places. A must be outside the poles for the north and east directions to be defined.)

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> wgs84 = nv.FrameE(name='WGS84')
>>> pointA = wgs84.GeoPoint(latitude=1, longitude=2, z=3, degrees=True)
>>> pointB = wgs84.GeoPoint(latitude=4, longitude=5, z=6, degrees=True)
```

Step1: Find p_AB_N (delta decomposed in N).

```
>>> p_AB_N = pointA.delta_to(pointB)
>>> x, y, z = p_AB_N.pvector.ravel()
>>> valtxt = '{0:8.2f}, {1:8.2f}, {2:8.2f}'.format(x, y, z)
>>> 'Ex1: delta north, east, down = {}'.format(valtxt)
'Ex1: delta north, east, down = 331730.23, 332997.87, 17404.27'
```

Step2: Also find the direction (azimuth) to B, relative to north:

```
>>> azimuth = p_AB_N.azimuth_deg
>>> 'azimuth = {0:4.2f} deg'.format(azimuth)
'azimuth = 45.11 deg'
```

5.1.5 nvector.objects.ECEFvector

class ECEFvector (pvector, frame=None, scalar=None)

Geographical position given as cartesian position vector in frame E

Parameters

pvector: 3 x n array Cartesian position vector(s) [m] from E to B, decomposed in E.

frame: FrameE object reference ellipsoid. The default ellipsoid model used is WGS84, but other ellipsoids/spheres might be specified.

See also:


GeoPoint, ECEFvector, Pvector

Notes

The position of B (typically body) relative to E (typically Earth) is given into this function as p-vector, p_{EB_E} relative to the center of the frame.

Examples

Example 3: “ECEF-vector to geodetic latitude”

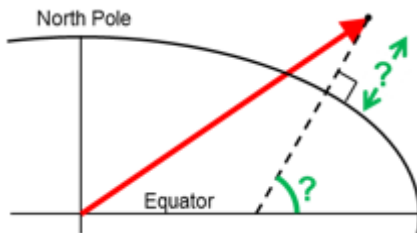


Position B is given as an “ECEF-vector” p_{EB_E} (i.e. a vector from E, the center of the Earth, to B, decomposed in E). Find the geodetic latitude, longitude and height (latEB, lonEB and hEB), assuming WGS-84 ellipsoid.

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> wgs84 = nv.FrameE(name='WGS84')
>>> position_B = 6371e3 * np.vstack((0.9, -1, 1.1)) # m
>>> p_EB_E = wgs84.ECEFvector(position_B)
>>> pointB = p_EB_E.to_geo_point()
```

```
>>> lat, lon, z = pointB.latlon_deg
>>> msg = 'Ex3: Pos B: lat, lon = {:4.2f}, {:4.2f} deg, height = {:9.2f} m'
>>> msg.format(lat, lon, -z)
'Ex3: Pos B: lat, lon = 39.38, -48.01 deg, height = 4702059.83 m'
```

Example 4: “Geodetic latitude to ECEF-vector”

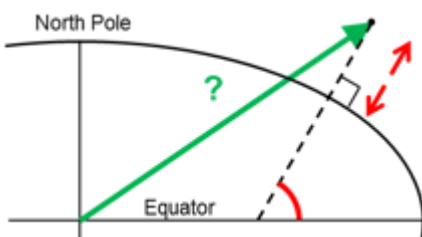

Geodetic latitude, longitude and height are given for position B as latEB, lonEB and hEB, find the ECEF-vector for this position, p_{EB_E} .

Solution:

```
>>> import nvector as nv
>>> wgs84 = nv.FrameE(name='WGS84')
>>> pointB = wgs84.GeoPoint(latitude=1, longitude=2, z=-3, degrees=True)
>>> p_EB_E = pointB.to_ecef_vector()
```

```
>>> 'Ex4: p_EB_E = {} m'.format(p_EB_E.pvector.ravel().tolist())
'Ex4: p_EB_E = [6373290.277218279, 222560.20067473652, 110568.82718178593] m'
↪ m'
```

(continues on next page)

(continued from previous page)

```
__init__(pvector[, frame=None, scalar=None])
    Initialize self. See help(type(self)) for accurate signature.
```

Methods

<code>__init__(pvector[, frame, scalar])</code>	Initialize self.
<code>change_frame(frame)</code>	Converts to Cartesian position vector in another frame
<code>delta_to(other)</code>	Returns cartesian delta vector from positions a to b decomposed in N.
<code>to_ecef_vector()</code>	Returns position as ECEFvector object.
<code>to_geo_point()</code>	Returns position as GeoPoint object.
<code>to_nvector()</code>	Returns position as Nvector object.

Attributes

<code>azimuth</code>	Azimuth in radian
<code>azimuth_deg</code>	Azimuth in degree.
<code>elevation</code>	Elevation in radian.
<code>elevation_deg</code>	Elevation in degree.
<code>length</code>	Length of the pvector.

5.1.6 nvector.objects.FrameB

```
class FrameB (point, yaw=0, pitch=0, roll=0, degrees=False)
    Body frame
```

Parameters

point: ECEFvector, GeoPoint or Nvector object position of the vehicle's reference point which also coincides with the origin of the frame B.

yaw, pitch, roll: real scalars defining the orientation of frame B in [deg] or [rad].

degrees [bool] if True yaw, pitch, roll are given in degrees otherwise in radians

See also:

FrameE, FrameL, FrameN

Notes

The frame is fixed to the vehicle where the x-axis points forward, the y-axis to the right (starboard) and the z-axis in the vehicle's down direction.

Examples

Example 2: “B and delta to C”



A radar or sonar attached to a vehicle B (Body coordinate frame) measures the distance and direction to an object C. We assume that the distance and two angles (typically bearing and elevation relative to B) are already combined to the vector p_{BC_B} (i.e. the vector from B to C, decomposed in B). The position of B is given as n_{EB_E} and z_{EB} , and the orientation (attitude) of B is given as R_{NB} (this rotation matrix can be found from roll/pitch/yaw by using `zyx2R`).

Find the exact position of object C as n-vector and depth (n_{EC_E} and z_{EC}), assuming Earth ellipsoid with semi-major axis a and flattening f . For WGS-72, use $a = 6\,378\,135$ m and $f = 1/298.26$.

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> wgs72 = nv.FrameE(name='WGS72')
>>> wgs72 = nv.FrameE(a=6378135, f=1.0/298.26)
```

Step 1: Position and orientation of B is given 400m above E:

```
>>> n_EB_E = wgs72.Nvector(nv.unit([[1], [2], [3]]), z=-400)
>>> frame_B = nv.FrameB(n_EB_E, yaw=10, pitch=20, roll=30, degrees=True)
```

Step 2: Delta BC decomposed in B

```
>>> p_BC_B = frame_B.Pvector(np.r_[3000, 2000, 100].reshape((-1, 1)))
```

Step 3: Decompose delta BC in E

```
>>> p_BC_E = p_BC_B.to_ecef_vector()
```

Step 4: Find point C by adding delta BC to EB

```
>>> p_EB_E = n_EB_E.to_ecef_vector()
>>> p_EC_E = p_EB_E + p_BC_E
>>> pointC = p_EC_E.to_geo_point()

>>> lat, lon, z = pointC.latlon_deg
>>> msg = 'Ex2: PosC: lat, lon = {:.42f}, {:.42f} deg, height = {:.42f} m'
>>> msg.format(lat, lon, -z)
'Ex2: PosC: lat, lon = 53.33, 63.47 deg, height = 406.01 m'
```

`__init__` (*point*, *yaw*=0, *pitch*=0, *roll*=0, *degrees*=False)
Initialize self. See `help(type(self))` for accurate signature.

Methods

<code>Pvector(pvector)</code>	Returns Pvector relative to the local frame.
<code>__init__(point[, yaw, pitch, roll, degrees])</code>	Initialize self.

Attributes

<code>R_EN</code>	Rotation matrix to go between E and B frame
-------------------	---

5.1.7 nvector.objects.FrameE

class FrameE (*a=None, f=None, name='WGS84', axes='e'*)

Earth-fixed frame

Parameters

a: real scalar, default WGS-84 ellipsoid. Semi-major axis of the Earth ellipsoid given in [m].

f: real scalar, default WGS-84 ellipsoid. Flattening [no unit] of the Earth ellipsoid. If $f==0$ then spherical Earth with radius *a* is used in stead of WGS-84.

name: string defining the default ellipsoid.

axes: 'e' or 'E' defines axes orientation of E frame. Default is *axes='e'* which means that the orientation of the axis is such that: z-axis -> North Pole, x-axis -> Latitude=Longitude=0.

See also:

[FrameN](#), [FrameL](#), [FrameB](#)

Notes

The frame is Earth-fixed (rotates and moves with the Earth) where the origin coincides with Earth's centre (geometrical centre of ellipsoid model).

`__init__` (*a=None, f=None, name='WGS84', axes='e'*)
Initialize self. See `help(type(self))` for accurate signature.

Methods

<code>ECEFvector(*args, **kws)</code>	Geographical position given as cartesian position vector in frame E
<code>GeoPoint(*args, **kws)</code>	Geographical position given as latitude, longitude, depth in frame E.
<code>Nvector(*args, **kws)</code>	Geographical position given as n-vector and depth in frame E
<code>__init__([a, f, name, axes])</code>	Initialize self.
<code>direct(lat_a, lon_a, azimuth, distance[, z, ...])</code>	Returns position B computed from position A, distance and azimuth.
<code>inverse(lat_a, lon_a, lat_b, lon_b[, z, ...])</code>	Returns ellipsoidal distance between positions as well as the direction.

5.1.8 nvector.objects.FrameN

class **FrameN** (*point*)

North-East-Down frame

Parameters

point: **ECEFvector**, **GeoPoint** or **Nvector object** position of the vehicle (B) which also defines the origin of the local frame N. The origin is directly beneath or above the vehicle (B), at Earth's surface (surface of ellipsoid model).

See also:

[*FrameE*](#), [*FrameL*](#), [*FrameB*](#)

Notes

The Cartesian frame is local and oriented North-East-Down, i.e., the x-axis points towards north, the y-axis points towards east (both are horizontal), and the z-axis is pointing down.

When moving relative to the Earth, the frame rotates about its z-axis to allow the x-axis to always point towards north. When getting close to the poles this rotation rate will increase, being infinite at the poles. The poles are thus singularities and the direction of the x- and y-axes are not defined here. Hence, this coordinate frame is NOT SUITABLE for general calculations.

Examples

Example 1: "A and B to delta"



Given two positions, A and B as latitudes, longitudes and depths relative to Earth, E.

Find the exact vector between the two positions, given in meters north, east, and down, and find the direction (azimuth) to B, relative to north. Assume WGS-84 ellipsoid. The given depths are from the ellipsoid surface. Use position A to define north, east, and down directions. (Due to the curvature of Earth and different directions to the North Pole, the north, east, and down directions will change (relative to Earth) for different places. A must be outside the poles for the north and east directions to be defined.)

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> wgs84 = nv.FrameE(name='WGS84')
>>> pointA = wgs84.GeoPoint(latitude=1, longitude=2, z=3, degrees=True)
>>> pointB = wgs84.GeoPoint(latitude=4, longitude=5, z=6, degrees=True)
```

Step1: Find p_AB_N (delta decomposed in N).

```
>>> p_AB_N = pointA.delta_to(pointB)
>>> x, y, z = p_AB_N.pvector.ravel()
>>> valtxt = '{0:8.2f}, {1:8.2f}, {2:8.2f}'.format(x, y, z)
>>> 'Ex1: delta north, east, down = {}'.format(valtxt)
'Ex1: delta north, east, down = 331730.23, 332997.87, 17404.27'
```

Step2: Also find the direction (azimuth) to B, relative to north:

```
>>> azimuth = p_AB_N.azimuth_deg
>>> 'azimuth = {0:4.2f} deg'.format(azimuth)
'azimuth = 45.11 deg'
```

`__init__(point)`

Initialize self. See help(type(self)) for accurate signature.

Methods

<code>Pvector(pvector)</code>	Returns Pvector relative to the local frame.
<code>__init__(point)</code>	Initialize self.

Attributes

<code>R_EN</code>	Rotation matrix to go between E and N frame
-------------------	---

5.1.9 nvector.objects.FrameL

class FrameL (*point*, *wander_azimuth=0*)

Local level, Wander azimuth frame

Parameters

point: **ECEFvector, GeoPoint or Nvector object** position of the vehicle (B) which also defines the origin of the local frame L. The origin is directly beneath or above the vehicle (B), at Earth's surface (surface of ellipsoid model).

wander_azimuth: **real scalar** Angle [rad] between the x-axis of L and the north direction.

See also:

FrameE, FrameN, FrameB

Notes

The Cartesian frame is local and oriented Wander-azimuth-Down. This means that the z-axis is pointing down. Initially, the x-axis points towards north, and the y-axis points towards east, but as the vehicle moves they are not rotating about the z-axis (their angular velocity relative to the Earth has zero component along the z-axis).

(Note: Any initial horizontal direction of the x- and y-axes is valid for L, but if the initial position is outside the poles, north and east are usually chosen for convenience.)

The L-frame is equal to the N-frame except for the rotation about the z-axis, which is always zero for this frame (relative to E). Hence, at a given time, the only difference between the frames is an angle between the x-axis of L and the north direction; this angle is called the wander azimuth angle. The L-frame is well suited for general calculations, as it is non-singular.

`__init__(point, wander_azimuth=0)`

Initialize self. See help(type(self)) for accurate signature.

Methods

<code>Pvector(pvector)</code>	Returns Pvector relative to the local frame.
<code>__init__(point[, wander_azimuth])</code>	Initialize self.

Attributes

<code>R_EN</code>	Rotation matrix to go between E and L frame
-------------------	---

5.1.10 nvector.objects.GeoPath

class `GeoPath` (*point_a*, *point_b*)

Geographical path between two positions in Frame E

Parameters


point_a, point_b: `Nvector`, `GeoPoint` or `ECEFvector` objects The path is defined by the line between position A and B, decomposed in E.

Notes

Please note that either position A or B or both might be a vector of points. In this case the `GeoPath` instance represents all the paths between the positions of A and the corresponding positions of B.

Examples

Example 5: “Surface distance”



Find the surface distance s_{AB} (i.e. great circle distance) between two positions A and B. The heights of A and B are ignored, i.e. if they don't have zero height, we seek the distance between the points that are at the surface of the Earth, directly above/below A and B. The Euclidean distance (chord length) d_{AB} should also be found. Use Earth radius $6371e3$ m. Compare the results with exact calculations for the WGS-84 ellipsoid.

Solution for a sphere:

```
>>> import numpy as np
>>> import nvector as nv
>>> frame_E = nv.FrameE(a=6371e3, f=0)
>>> positionA = frame_E.GeoPoint(latitude=88, longitude=0, degrees=True)
>>> positionB = frame_E.GeoPoint(latitude=89, longitude=-170, degrees=True)
```

```
>>> s_AB, _azia, _azib = positionA.distance_and_azimuth(positionB)
>>> p_AB_E = positionB.to_ecef_vector() - positionA.to_ecef_vector()
>>> d_AB = p_AB_E.length
```

```
>>> msg = 'Ex5: Great circle and Euclidean distance = {}'
>>> msg = msg.format('{:5.2f} km, {:5.2f} km')
>>> msg.format(s_AB / 1000, d_AB / 1000)
'Ex5: Great circle and Euclidean distance = 332.46 km, 332.42 km'
```


Alternative sphere solution:

```
>>> path = nv.GeoPath(positionA, positionB)
>>> s_AB2 = path.track_distance(method='greatcircle')
>>> d_AB2 = path.track_distance(method='euclidean')
>>> msg.format(s_AB2 / 1000, d_AB2 / 1000)
'Ex5: Great circle and Euclidean distance = 332.46 km, 332.42 km'
```

Exact solution for the WGS84 ellipsoid:

```
>>> wgs84 = nv.FrameE(name='WGS84')
>>> point1 = wgs84.GeoPoint(latitude=88, longitude=0, degrees=True)
>>> point2 = wgs84.GeoPoint(latitude=89, longitude=-170, degrees=True)
>>> s_12, _azi1, _azi2 = point1.distance_and_azimuth(point2)
```

```
>>> p_12_E = point2.to_ecef_vector() - point1.to_ecef_vector()
>>> d_12 = p_12_E.length
>>> msg = 'Ellipsoidal and Euclidean distance = {:5.2f} km, {:5.2f} km'
>>> msg.format(s_12 / 1000, d_12 / 1000)
'Ellipsoidal and Euclidean distance = 333.95 km, 333.91 km'
```

Example 6 “Interpolated position”

Given the position of B at time t_0 and t_1 , $n_{EB_E}(t_0)$ and $n_{EB_E}(t_1)$.

Find an interpolated position at time t_i , $n_{EB_E}(t_i)$. All positions are given as n-vectors.

Solution:


```
>>> import nvector as nv
>>> wgs84 = nv.FrameE(name='WGS84')
>>> n_EB_E_t0 = wgs84.GeoPoint(89, 0, degrees=True).to_nvector()
>>> n_EB_E_t1 = wgs84.GeoPoint(89, 180, degrees=True).to_nvector()
>>> path = nv.GeoPath(n_EB_E_t0, n_EB_E_t1)
```

```
>>> t0 = 10.
>>> t1 = 20.
>>> ti = 16. # time of interpolation
>>> ti_n = (ti - t0) / (t1 - t0) # normalized time of interpolation
```

```
>>> g_EB_E_ti = path.interpolate(ti_n).to_geo_point()
```

```
>>> lat_ti, lon_ti, z_ti = g_EB_E_ti.latlon_deg
>>> msg = 'Ex6, Interpolated position: lat, lon = {:2.1f} deg, {:2.1f} deg'
>>> msg.format(lat_ti, lon_ti)
'Ex6, Interpolated position: lat, lon = 89.8 deg, 180.0 deg'
```

Example 9: “Intersection of two paths”



Define a path from two given positions (at the surface of a spherical Earth), as the great circle that goes through the two points.

Path A is given by A1 and A2, while path B is given by B1 and B2.


Find the position C where the two great circles intersect.

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> pointA1 = nv.GeoPoint(10, 20, degrees=True)
>>> pointA2 = nv.GeoPoint(30, 40, degrees=True)
>>> pointB1 = nv.GeoPoint(50, 60, degrees=True)
>>> pointB2 = nv.GeoPoint(70, 80, degrees=True)
>>> pathA = nv.GeoPath(pointA1, pointA2)
>>> pathB = nv.GeoPath(pointB1, pointB2)

>>> pointC = pathA.intersect(pathB)
>>> np.allclose(pathA.on_path(pointC), pathB.on_path(pointC))
True
>>> np.allclose(pathA.on_great_circle(pointC),
...             pathB.on_great_circle(pointC))
True
>>> pointC = pointC.to_geo_point()
>>> lat, lon = pointC.latitude_deg, pointC.longitude_deg
>>> msg = 'Ex9, Intersection: lat, lon = {:4.2f}, {:4.2f} deg'
>>> msg.format(lat, lon)
'Ex9, Intersection: lat, lon = 40.32, 55.90 deg'
```

Example 10: “Cross track distance”



Path A is given by the two positions A1 and A2 (similar to the previous example).

Find the cross track distance sxt between the path A (i.e. the great circle through A1 and A2) and the position B (i.e. the shortest distance at the surface, between the great circle and B).

Also find the Euclidean distance dxt between B and the plane defined by the great circle. Use Earth radius 6371e3.

Finally, find the intersection point on the great circle and determine if it is between position A1 and A2.

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> frame = nv.FrameE(a=6371e3, f=0)
```

(continues on next page)

(continued from previous page)

```
>>> pointA1 = frame.GeoPoint(0, 0, degrees=True)
>>> pointA2 = frame.GeoPoint(10, 0, degrees=True)
>>> pointB = frame.GeoPoint(1, 0.1, degrees=True)
>>> pathA = nv.GeoPath(pointA1, pointA2)
```

```
>>> s_xt = pathA.cross_track_distance(pointB, method='greatcircle')
>>> d_xt = pathA.cross_track_distance(pointB, method='euclidean')
```

```
>>> val_txt = '{:4.2f} km, {:4.2f} km'.format(s_xt/1000, d_xt/1000)
>>> 'Ex10: Cross track distance: s_xt, d_xt = {}'.format(val_txt)
'Ex10: Cross track distance: s_xt, d_xt = 11.12 km, 11.12 km'
```

```
>>> pointC = pathA.closest_point_on_great_circle(pointB)
>>> np.allclose(pathA.on_path(pointC), True)
True
```

`__init__` (*point_a*, *point_b*)

Initialize self. See help(type(self)) for accurate signature.

Methods

<code>__init__(point_a, point_b)</code>	Initialize self.
<code>closest_point_on_great_circle(point)</code>	Returns closest point on great circle path to the point.
<code>closest_point_on_path(point)</code>	Returns closest point on great circle path segment to the point.
<code>cross_track_distance(point[, method, radius])</code>	Returns cross track distance from path to point.
<code>ecef_vectors()</code>	Returns <i>point_a</i> and <i>point_b</i> as ECEF-vectors
<code>geo_points()</code>	Returns <i>point_a</i> and <i>point_b</i> as geo-points
<code>interpolate(ti)</code>	Returns the interpolated point along the path
<code>intersect(path)</code>	Returns the intersection(s) between the great circles of the two paths
<code>intersection(**kwargs)</code>	<i>intersection</i> is deprecated, use <i>intersect</i> instead!
<code>nvector_normals()</code>	Returns nvector normals for position a and b
<code>nvectors()</code>	Returns <i>point_a</i> and <i>point_b</i> as n-vectors
<code>on_great_circle(point[, atol])</code>	Returns True if point is on the great circle within a tolerance.
<code>on_path(point[, method, rtol, atol])</code>	Returns True if point is on the path between A and B within a tolerance.
<code>track_distance([method, radius])</code>	Returns the path distance computed at the average height.

Attributes

<code>positionA</code>	<i>positionA</i> is deprecated, use <i>point_a</i> instead!
<code>positionB</code>	<i>positionB</i> is deprecated, use <i>point_b</i> instead!

5.1.11 nvector.objects.GeoPoint

class GeoPoint (*latitude, longitude, z=0, frame=None, degrees=False*)

Geographical position given as latitude, longitude, depth in frame E.

Parameters

latitude, longitude: real scalars or vectors of length **n**. Geodetic latitude and longitude given in [rad or deg]

z: real scalar or vector of length **n**. Depth(s) [m] relative to the ellipsoid (depth = -height)

frame: **FrameE object** reference ellipsoid. The default ellipsoid model used is WGS84, but other ellipsoids/spheres might be specified.

degrees: **bool** True if input are given in degrees otherwise radians are assumed.

Examples

Solve geodesic problems.

The following illustrates its use

```
>>> import nvector as nv
>>> wgs84 = nv.FrameE(name='WGS84')
>>> point_a = wgs84.GeoPoint(-41.32, 174.81, degrees=True)
>>> point_b = wgs84.GeoPoint(40.96, -5.50, degrees=True)
```

```
>>> print(point_a)
GeoPoint(latitude=-0.721170046924057,
          longitude=3.0510100654112877,
          z=0,
          frame=FrameE(a=6378137.0,
                       f=0.0033528106647474805,
                       name='WGS84',
                       R_Ee=[[0.0, 0.0, 1.0], [0.0, 1.0, 0.0], [-1.0, 0.0, 0.
→0]]))
```

The geodesic inverse problem

```
>>> s12, az1, az2 = point_a.distance_and_azimuth(point_b, degrees=True)
>>> 's12 = {:.2f}, az1 = {:.2f}, az2 = {:.2f}'.format(s12, az1, az2)
's12 = 19959679.27, az1 = 161.07, az2 = 18.83'
```

The geodesic direct problem

```
>>> point_a = wgs84.GeoPoint(40.6, -73.8, degrees=True)
>>> az1, distance = 45, 10000e3
>>> point_b, az2 = point_a.displace(distance, az1, degrees=True)
>>> lat2, lon2 = point_b.latitude_deg, point_b.longitude_deg
>>> msg = 'lat2 = {:.2f}, lon2 = {:.2f}, az2 = {:.2f}'
>>> msg.format(lat2, lon2, az2)
'lat2 = 32.64, lon2 = 49.01, az2 = 140.37'
```

__init__ (*latitude, longitude, z=0, frame=None, degrees=False*)

Initialize self. See help(type(self)) for accurate signature.

Methods

<code>__init__(latitude, longitude[, z, frame, ...])</code>	Initialize self.
<code>delta_to(other)</code>	Returns cartesian delta vector from positions a to b decomposed in N.
<code>displace(distance, azimuth[, long_unroll, ...])</code>	Returns position b computed from current position, distance and azimuth.
<code>distance_and_azimuth(point[, long_unroll, ...])</code>	Returns ellipsoidal distance between positions as well as the direction.
<code>to_ecef_vector()</code>	Returns position as ECEFvector object.
<code>to_geo_point()</code>	Returns position as GeoPoint object.
<code>to_nvector()</code>	Returns position as Nvector object.

Attributes

<code>latitude_deg</code>	latitude in degrees.
<code>latlon</code>	(latitude, longitude, z) tuple, angles are in radian.
<code>latlon_deg</code>	(latitude_deg, longitude_deg, z) tuple, angles are in degree.
<code>longitude_deg</code>	longitude in degrees.
<code>scalar</code>	True if the position is a scalar point

5.1.12 nvector.objects.Nvector

class Nvector (*normal, z=0, frame=None*)

Geographical position given as n-vector and depth in frame E

Parameters

normal: **3 x n array** n-vector(s) [no unit] decomposed in E.

z: **real scalar or vector of length n.** Depth(s) [m] relative to the ellipsoid (depth = -height)

frame: **FrameE object** reference ellipsoid. The default ellipsoid model used is WGS84, but other ellipsoids/spheres might be specified.

See also:

GeoPoint, ECEFvector, Pvector

Notes

The position of B (typically body) relative to E (typically Earth) is given into this function as n-vector, `n_EB_E` and a depth, `z` relative to the ellipsoid.

Examples

```
>>> import nvector as nv
>>> wgs84 = nv.FrameE(name='WGS84')
>>> point_a = wgs84.GeoPoint(-41.32, 174.81, degrees=True)
>>> point_b = wgs84.GeoPoint(40.96, -5.50, degrees=True)
>>> nv_a = point_a.to_nvector()
>>> print(nv_a)
Nvector(normal=[[-0.7479546170813224], [0.06793758070955484], [-0.
↪6602638683996461]],
        z=0,
        frame=FrameE(a=6378137.0,
                      f=0.0033528106647474805,
                      name='WGS84',
                      R_Ee=[[0.0, 0.0, 1.0], [0.0, 1.0, 0.0], [-1.0, 0.0, 0.0]]))
```

`__init__(normal, z=0, frame=None)`
Initialize self. See `help(type(self))` for accurate signature.

Methods

<code>__init__(normal[, z, frame])</code>	Initialize self.
<code>delta_to(other)</code>	Returns cartesian delta vector from positions a to b decomposed in N.
<code>mean()</code>	Returns mean position of the n-vectors.
<code>mean_horizontal_position(**kwds)</code>	<i>mean_horizontal_position</i> is deprecated, use <i>mean</i> instead!
<code>to_ecef_vector()</code>	Returns position as ECEFvector object.
<code>to_geo_point()</code>	Returns position as GeoPoint object.
<code>to_nvector()</code>	Returns position as Nvector object.
<code>unit()</code>	Normalizes self to unit vector(s)

Attributes

<code>scalar</code>	True if the position is a scalar point
---------------------	--

5.1.13 nvector.objects.Pvector

class Pvector (*pvector, frame, scalar=None*)
Geographical position given as cartesian position vector in a frame.

`__init__(pvector, frame, scalar=None)`
Initialize self. See `help(type(self))` for accurate signature.

Methods

<code>__init__(pvector, frame[, scalar])</code>	Initialize self.
<code>delta_to(other)</code>	Returns cartesian delta vector from positions a to b decomposed in N.
<code>to_ecef_vector()</code>	Returns position as ECEFvector object.
<code>to_geo_point()</code>	Returns position as GeoPoint object.
<code>to_nvector()</code>	Returns position as Nvector object.

Attributes

<code>azimuth</code>	Azimuth in radian
<code>azimuth_deg</code>	Azimuth in degree.
<code>elevation</code>	Elevation in radian.
<code>elevation_deg</code>	Elevation in degree.
<code>length</code>	Length of the pvector.

5.2 Geodesic functions

<code>closest_point_on_great_circle(path, n_EB_E)</code>	Returns closest point C on great circle path A to position B.
<code>cross_track_distance(path, n_EB_E[, method, ...])</code>	Returns cross track distance between path A and position B.
<code>euclidean_distance(n_EA_E, n_EB_E[, radius])</code>	Returns Euclidean distance between positions A and B
<code>great_circle_distance(n_EA_E, n_EB_E[, radius])</code>	Returns great circle distance between positions A and B
<code>great_circle_normal(n_EA_E, n_EB_E)</code>	Returns the unit normal(s) to the great circle(s)
<code>interpolate(path, ti)</code>	Returns the interpolated point along the path
<code>intersect(path_a, path_b)</code>	Returns the intersection(s) between the great circles of the two paths
<code>lat_lon2n_E(latitude, longitude[, R_Ee])</code>	Converts latitude and longitude to n-vector.
<code>mean_horizontal_position(n_EB_E)</code>	Returns the n-vector of the horizontal mean position.
<code>n_E2lat_lon(n_E[, R_Ee])</code>	Converts n-vector to latitude and longitude.
<code>n_EB_E2p_EB_E(n_EB_E[, depth, a, f, R_Ee])</code>	Converts n-vector to Cartesian position vector in meters.
<code>p_EB_E2n_EB_E(p_EB_E[, a, f, R_Ee])</code>	Converts Cartesian position vector in meters to n-vector.
<code>n_EA_E_and_n_EB_E2p_AB_E(n_EA_E, n_EB_E[, ...])</code>	Returns the delta vector from position A to B decomposed in E.
<code>n_EA_E_and_p_AB_E2n_EB_E(n_EA_E, p_AB_E[, ...])</code>	
<code>n_EA_E_and_n_EB_E2azimuth(n_EA_E, n_EB_E[, ...])</code>	Returns azimuth from A to B, relative to North:
<code>n_EA_E_distance_and_azimuth2n_EB_E(n_EA_E, distance, azimuth[, ...])</code>	Returns position B from azimuth and distance from position A
<code>on_great_circle(path, n_EB_E[, radius, atol])</code>	Returns True if position B is on great circle through path A.
<code>on_great_circle_path(path, n_EB_E[, radius, ...])</code>	Returns True if position B is on great circle and between endpoints of path A.

5.2.1 nvector.core.closest_point_on_great_circle

closest_point_on_great_circle (*path, n_EB_E*)

Returns closest point C on great circle path A to position B.

Parameters

path: tuple of 2 n-vectors of 3 x n arrays 2 n-vectors of positions defining path A, decomposed in E.


n_EB_E: 3 x m array n-vector(s) of position B to find the closest point to.

Returns

n_EC_E: 3 x max(m, n) array n-vector(s) of closest position C on great circle path A

Examples

Example 10: “Cross track distance”



Path A is given by the two positions A1 and A2 (similar to the previous example).

Find the cross track distance *sxt* between the path A (i.e. the great circle through A1 and A2) and the position B (i.e. the shortest distance at the surface, between the great circle and B).

Also find the Euclidean distance *dxt* between B and the plane defined by the great circle. Use Earth radius 6371e3.

Finally, find the intersection point on the great circle and determine if it is between position A1 and A2.

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import rad, deg
>>> n_EA1_E = nv.lat_lon2n_E(rad(0), rad(0))
>>> n_EA2_E = nv.lat_lon2n_E(rad(10), rad(0))
>>> n_EB_E = nv.lat_lon2n_E(rad(1), rad(0.1))
>>> path = (n_EA1_E, n_EA2_E)
>>> radius = 6371e3 # mean earth radius [m]
>>> s_xt = nv.cross_track_distance(path, n_EB_E, radius=radius)
>>> d_xt = nv.cross_track_distance(path, n_EB_E, method='euclidean',
...                               radius=radius)
```

```
>>> val_txt = '{:4.2f} km, {:4.2f} km'.format(s_xt[0]/1000, d_xt[0]/1000)
>>> 'Ex10: Cross track distance: s_xt, d_xt = {0}'.format(val_txt)
'Ex10: Cross track distance: s_xt, d_xt = 11.12 km, 11.12 km'
```

```
>>> n_EC_E = nv.closest_point_on_great_circle(path, n_EB_E)
>>> np.allclose(nv.on_great_circle_path(path, n_EC_E, radius), True)
True
```

Alternative solution 2:

```
>>> s_xt2 = nv.great_circle_distance(n_EB_E, n_EC_E, radius)
>>> d_xt2 = nv.euclidean_distance(n_EB_E, n_EC_E, radius)
>>> np.allclose(s_xt, s_xt2), np.allclose(d_xt, d_xt2)
(True, True)
```

Alternative solution 3:

```
>>> c_E = nv.great_circle_normal(n_EA1_E, n_EA2_E)
>>> sin_theta = -np.dot(c_E.T, n_EB_E).ravel()
>>> s_xt3 = np.arcsin(sin_theta) * radius
>>> d_xt3 = sin_theta * radius
>>> np.allclose(s_xt, s_xt3), np.allclose(d_xt, d_xt3)
(True, True)
```

5.2.2 nvector.core.cross_track_distance

cross_track_distance (*path, n_EB_E, method='greatcircle', radius=6371009.0*)

Returns cross track distance between path A and position B.

Parameters

path: tuple of 2 n-vectors 2 n-vectors of positions defining path A, decomposed in E.


n_EB_E: 3 x m array n-vector(s) of position B to measure the cross track distance to.

method: string defining distance calculated. Options are: 'greatcircle' or 'euclidean'

radius: real scalar radius of sphere. (default 6371009.0)

Returns

distance [array of length max(n, m)] cross track distance(s)

Examples**Example 10: “Cross track distance”**

Path A is given by the two positions A1 and A2 (similar to the previous example).

Find the cross track distance *sxt* between the path A (i.e. the great circle through A1 and A2) and the position B (i.e. the shortest distance at the surface, between the great circle and B).

Also find the Euclidean distance *dxt* between B and the plane defined by the great circle. Use Earth radius 6371e3.

Finally, find the intersection point on the great circle and determine if it is between position A1 and A2.

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import rad, deg
>>> n_EA1_E = nv.lat_lon2n_E(rad(0), rad(0))
>>> n_EA2_E = nv.lat_lon2n_E(rad(10), rad(0))
```

(continues on next page)

(continued from previous page)

```
>>> n_EB_E = nv.lat_lon2n_E(rad(1), rad(0.1))
>>> path = (n_EA1_E, n_EA2_E)
>>> radius = 6371e3 # mean earth radius [m]
>>> s_xt = nv.cross_track_distance(path, n_EB_E, radius=radius)
>>> d_xt = nv.cross_track_distance(path, n_EB_E, method='euclidean',
...                               radius=radius)
```

```
>>> val_txt = '{:4.2f} km, {:4.2f} km'.format(s_xt[0]/1000, d_xt[0]/1000)
>>> 'Ex10: Cross track distance: s_xt, d_xt = {0}'.format(val_txt)
'Ex10: Cross track distance: s_xt, d_xt = 11.12 km, 11.12 km'
```

```
>>> n_EC_E = nv.closest_point_on_great_circle(path, n_EB_E)
>>> np.allclose(nv.on_great_circle_path(path, n_EC_E, radius), True)
True
```

Alternative solution 2:

```
>>> s_xt2 = nv.great_circle_distance(n_EB_E, n_EC_E, radius)
>>> d_xt2 = nv.euclidean_distance(n_EB_E, n_EC_E, radius)
>>> np.allclose(s_xt, s_xt2), np.allclose(d_xt, d_xt2)
(True, True)
```


Alternative solution 3:

```
>>> c_E = nv.great_circle_normal(n_EA1_E, n_EA2_E)
>>> sin_theta = -np.dot(c_E.T, n_EB_E).ravel()
>>> s_xt3 = np.arcsin(sin_theta) * radius
>>> d_xt3 = sin_theta * radius
>>> np.allclose(s_xt, s_xt3), np.allclose(d_xt, d_xt3)
(True, True)
```

5.2.3 nvector.core.euclidean_distance

euclidean_distance (*n_EA_E, n_EB_E, radius=6371009.0*)

Returns Euclidean distance between positions A and B

Parameters**n_EA_E, n_EB_E: 3 x n array** n-vector(s) [no unit] of position A and B, decomposed in E.**radius: real scalar** radius of sphere.**Examples****Example 5: “Surface distance”**

Find the surface distance s_{AB} (i.e. great circle distance) between two positions A and B. The heights of A and B are ignored, i.e. if they don't have zero height, we seek the distance between the points that are at the surface of the Earth, directly above/below A and B. The Euclidean distance (chord length) d_{AB} should

also be found. Use Earth radius 6371e3 m. Compare the results with exact calculations for the WGS-84 ellipsoid.

Solution for a sphere:

```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import rad
```

```
>>> n_EA_E = nv.lat_lon2n_E(rad(88), rad(0))
>>> n_EB_E = nv.lat_lon2n_E(rad(89), rad(-170))
```

```
>>> r_Earth = 6371e3 # m, mean Earth radius
>>> s_AB = nv.great_circle_distance(n_EA_E, n_EB_E, radius=r_Earth)[0]
>>> d_AB = nv.euclidean_distance(n_EA_E, n_EB_E, radius=r_Earth)[0]
```

```
>>> msg = 'Ex5: Great circle and Euclidean distance = {}'
>>> msg = msg.format('{:5.2f} km, {:5.2f} km')
>>> msg.format(s_AB / 1000, d_AB / 1000)
'Ex5: Great circle and Euclidean distance = 332.46 km, 332.42 km'
```

Exact solution for the WGS84 ellipsoid:

```
>>> wgs84 = nv.FrameE(name='WGS84')
>>> point1 = wgs84.GeoPoint(latitude=88, longitude=0, degrees=True)
>>> point2 = wgs84.GeoPoint(latitude=89, longitude=-170, degrees=True)
>>> s_12, _azi1, _azi2 = point1.distance_and_azimuth(point2)
```

```
>>> p_12_E = point2.to_ecef_vector() - point1.to_ecef_vector()
>>> d_12 = p_12_E.length
>>> msg = 'Ellipsoidal and Euclidean distance = {:5.2f} km, {:5.2f} km'
>>> msg.format(s_12 / 1000, d_12 / 1000)
'Ellipsoidal and Euclidean distance = 333.95 km, 333.91 km'
```

5.2.4 nvector.core.great_circle_distance

great_circle_distance (*n_EA_E*, *n_EB_E*, *radius=6371009.0*)

Returns great circle distance between positions A and B

Parameters


n_EA_E, n_EB_E: 3 x n array n-vector(s) [no unit] of position A and B, decomposed in E.

radius: real scalar radius of sphere.

Formulae is given by equation (16) in Gade (2010) and is well conditioned for all angles.

Examples

Example 5: “Surface distance”



Find the surface distance s_{AB} (i.e. great circle distance) between two positions A and B. The heights of A and B are ignored, i.e. if they don't have zero height, we seek the distance between the points that are at the surface of the Earth, directly above/below A and B. The Euclidean distance (chord length) d_{AB} should also be found. Use Earth radius $6371e3$ m. Compare the results with exact calculations for the WGS-84 ellipsoid.

Solution for a sphere:

```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import rad
```

```
>>> n_EA_E = nv.lat_lon2n_E(rad(88), rad(0))
>>> n_EB_E = nv.lat_lon2n_E(rad(89), rad(-170))
```

```
>>> r_Earth = 6371e3 # m, mean Earth radius
>>> s_AB = nv.great_circle_distance(n_EA_E, n_EB_E, radius=r_Earth)[0]
>>> d_AB = nv.euclidean_distance(n_EA_E, n_EB_E, radius=r_Earth)[0]
```

```
>>> msg = 'Ex5: Great circle and Euclidean distance = {}'
>>> msg = msg.format('{:5.2f} km, {:5.2f} km')
>>> msg.format(s_AB / 1000, d_AB / 1000)
'Ex5: Great circle and Euclidean distance = 332.46 km, 332.42 km'
```

Exact solution for the WGS84 ellipsoid:

```
>>> wgs84 = nv.FrameE(name='WGS84')
>>> point1 = wgs84.GeoPoint(latitude=88, longitude=0, degrees=True)
>>> point2 = wgs84.GeoPoint(latitude=89, longitude=-170, degrees=True)
>>> s_12, _azi1, _azi2 = point1.distance_and_azimuth(point2)
```

```
>>> p_12_E = point2.to_ecef_vector() - point1.to_ecef_vector()
>>> d_12 = p_12_E.length
>>> msg = 'Ellipsoidal and Euclidean distance = {:5.2f} km, {:5.2f} km'
>>> msg.format(s_12 / 1000, d_12 / 1000)
'Ellipsoidal and Euclidean distance = 333.95 km, 333.91 km'
```

5.2.5 nvector.core.great_circle_normal

great_circle_normal (*n_EA_E*, *n_EB_E*)

Returns the unit normal(s) to the great circle(s)

Parameters

n_EA_E, n_EB_E: 3 x n array n-vector(s) [no unit] of position A and B, decomposed in E.

5.2.6 nvector.core.interpolate

interpolate (*path*, *ti*)

Returns the interpolated point along the path

Parameters

path: tuple of n-vectors (positionA, positionB)

ti: real scalar interpolation time assuming position A and B is at $t_0=0$ and $t_1=1$, respectively.

Returns

point: Nvector point of interpolation along path

5.2.7 nvector.core.intersect

intersect (*path_a*, *path_b*)

Returns the intersection(s) between the great circles of the two paths

Parameters


path_a, path_b: tuple of 2 n-vectors defining path A and path B, respectively. Path A and B has shape $2 \times 3 \times n$ and $2 \times 3 \times m$, respectively.

Returns

n_EC_E [array of shape $3 \times \max(n, m)$] n-vector(s) [no unit] of position C decomposed in E. point(s) of intersection between paths.

Examples

Example 9: “Intersection of two paths”



Define a path from two given positions (at the surface of a spherical Earth), as the great circle that goes through the two points.

Path A is given by A1 and A2, while path B is given by B1 and B2.

Find the position C where the two great circles intersect.

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import rad, deg
```

```
>>> n_EA1_E = nv.lat_lon2n_E(rad(10), rad(20))
>>> n_EA2_E = nv.lat_lon2n_E(rad(30), rad(40))
>>> n_EB1_E = nv.lat_lon2n_E(rad(50), rad(60))
>>> n_EB2_E = nv.lat_lon2n_E(rad(70), rad(80))
```

```
>>> n_EC_E = nv.unit(np.cross(np.cross(n_EA1_E, n_EA2_E, axis=0),
...                             np.cross(n_EB1_E, n_EB2_E, axis=0),
...                             axis=0))
>>> n_EC_E *= np.sign(np.dot(n_EC_E.T, n_EA1_E))
```

or alternatively

```
>>> path_a, path_b = (n_EA1_E, n_EA2_E), (n_EB1_E, n_EB2_E)
>>> n_EC_E = nv.intersect(path_a, path_b)
```

```
>>> lat_EC, lon_EC = nv.n_E2lat_lon(n_EC_E)
```

```
>>> lat, lon = deg(lat_EC), deg(lon_EC)
>>> msg = 'Ex9, Intersection: lat, lon = {:4.2f}, {:4.2f} deg'
>>> msg.format(lat[0], lon[0])
'Ex9, Intersection: lat, lon = 40.32, 55.90 deg'
```

```
>>> np.allclose(nv.on_great_circle_path(path_a, n_EC_E),
...             nv.on_great_circle_path(path_b, n_EC_E))
True
>>> np.allclose(nv.on_great_circle(path_a, n_EC_E), nv.on_great_
↪ circle(path_b, n_EC_E))
True
```

5.2.8 nvector.core.lat_lon2n_E

lat_lon2n_E (*latitude, longitude, R_Ee=None*)

Converts latitude and longitude to n-vector.

Parameters

latitude, longitude: real scalars or vectors of length **n**. Geodetic latitude and longitude given in [rad]

R_Ee [3 x 3 array] rotation matrix defining the axes of the coordinate frame E.

Returns

n_E: 3 x n array n-vector(s) [no unit] decomposed in E.

See also:

[`n\_E2lat\_lon`](#)

5.2.9 nvector.core.mean_horizontal_position

mean_horizontal_position (*n_EB_E*)

Returns the n-vector of the horizontal mean position.

Parameters

n_EB_E: 3 x n array n-vectors [no unit] of positions B_i , decomposed in E.

Returns

p_EM_E: 3 x 1 array n-vector [no unit] of the mean positions of all B_i , decomposed in E.

Examples

Example 7: “Mean position”



Three positions A, B, and C are given as n-vectors n_{EA_E} , n_{EB_E} , and n_{EC_E} . Find the mean position, M, given as n_{EM_E} . Note that the calculation is independent of the depths of the positions.

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import rad, deg
```

```
>>> n_EA_E = nv.lat_lon2n_E(rad(90), rad(0))
>>> n_EB_E = nv.lat_lon2n_E(rad(60), rad(10))
>>> n_EC_E = nv.lat_lon2n_E(rad(50), rad(-20))
```

```
>>> n_EM_E = nv.unit(n_EA_E + n_EB_E + n_EC_E)
```

or

```
>>> n_EM_E = nv.mean_horizontal_position(np.hstack((n_EA_E, n_EB_E, n_EC_
↪E)))
```

```
>>> lat, lon = nv.n_E2lat_lon(n_EM_E)
>>> lat, lon = deg(lat), deg(lon)
>>> msg = 'Ex7: Pos M: lat, lon = {:.2f}, {:.2f} deg'
>>> msg.format(lat[0], lon[0])
'Ex7: Pos M: lat, lon = 67.24, -6.92 deg'
```

5.2.10 `nvector.core.n_E2lat_lon`

`n_E2lat_lon` (*n_E*, *R_Ee*=None)

Converts n-vector to latitude and longitude.

Parameters

n_E: 3 x n array n-vector [no unit] decomposed in E.

R_Ee [3 x 3 array] rotation matrix defining the axes of the coordinate frame E.

Returns

latitude, longitude: real scalars or vectors of length n. Geodetic latitude and longitude given in [rad]

See also:

[`lat\_lon2n\_E`](#)

5.2.11 `nvector.core.n_EB_E2p_EB_E`

`n_EB_E2p_EB_E` (*n_EB_E*, *depth*=0, *a*=6378137, *f*=0.0033528106647474805, *R_Ee*=None)

Converts n-vector to Cartesian position vector in meters.

Parameters

n_EB_E: 3 x n array n-vector(s) [no unit] of position B, decomposed in E.

depth: 1 x n array Depth(s) [m] of system B, relative to the ellipsoid (depth = -height)

a: real scalar, default WGS-84 ellipsoid. Semi-major axis of the Earth ellipsoid given in [m].

f: real scalar, default WGS-84 ellipsoid. Flattening [no unit] of the Earth ellipsoid. If *f*=0 then spherical Earth with radius *a* is used in stead of WGS-84.

R_Ee [3 x 3 array] rotation matrix defining the axes of the coordinate frame E.

Returns

p_EB_E: 3 x n array Cartesian position vector(s) from E to B, decomposed in E.

See also:


[`p\_EB\_E2n\_EB\_E`](#), [`n\_EA\_E`](#) and [`p\_AB\_E2n\_EB\_E`](#), [`n\_EA\_E`](#) and [`n\_EB\_E2p\_AB\_E`](#)

Notes

The position of B (typically body) relative to E (typically Earth) is given into this function as n-vector, *n_EB_E*. The function converts to cartesian position vector (“ECEF-vector”), *p_EB_E*, in meters. The calculation is exact, taking the ellipsity of the Earth into account. It is also non-singular as both n-vector and p-vector are non-singular (except for the center of the Earth). The default ellipsoid model used is WGS-84, but other ellipsoids/spheres might be specified.

Examples

Example 4: “Geodetic latitude to ECEF-vector”

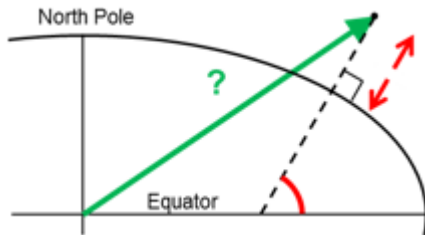

Geodetic latitude, longitude and height are given for position B as lat_{EB} , lon_{EB} and h_{EB} , find the ECEF-vector for this position, p_{EB_E} .

Solution:

```
>>> import nvector as nv
>>> from nvector import rad
>>> wgs84 = dict(a=6378137.0, f=1.0/298.257223563)
>>> lat_EB, lon_EB = rad(1), rad(2)
>>> h_EB = 3
>>> n_EB_E = nv.lat_lon2n_E(lat_EB, lon_EB)
>>> p_EB_E = nv.n_EB_E2p_EB_E(n_EB_E, -h_EB, **wgs84)
```

```
>>> 'Ex4: p_EB_E = {} m'.format(p_EB_E.ravel().tolist())
'Ex4: p_EB_E = [6373290.277218279, 222560.20067473652, 110568.82718178593]
↪m'
```

5.2.12 nvector.core.p_EB_E2n_EB_E

p_EB_E2n_EB_E (p_{EB_E} , $a=6378137$, $f=0.0033528106647474805$, $R_{Ee}=None$)

Converts Cartesian position vector in meters to n-vector.

Parameters

p_EB_E: 3 x n array Cartesian position vector(s) from E to B, decomposed in E.

a: real scalar, default WGS-84 ellipsoid. Semi-major axis of the Earth ellipsoid given in [m].

f: real scalar, default WGS-84 ellipsoid. Flattening [no unit] of the Earth ellipsoid. If $f==0$ then spherical Earth with radius a is used in stead of WGS-84.

R_Ee [3 x 3 array] rotation matrix defining the axes of the coordinate frame E.

Returns

n_EB_E: 3 x n array n-vector(s) [no unit] of position B, decomposed in E.

depth: 1 x n array Depth(s) [m] of system B, relative to the ellipsoid (depth = -height)

See also:


[`n\_EB\_E2p\_EB\_E`](#), [`n\_EA\_E`](#) and [`p\_AB\_E2n\_EB\_E`](#), [`n\_EA\_E`](#) and [`n\_EB\_E2p\_AB\_E`](#)

Notes

The position of B (typically body) relative to E (typically Earth) is given into this function as cartesian position vector p_{EB_E} , in meters. (“ECEF-vector”). The function converts to n-vector, n_{EB_E} and its depth, z_{EB} . The calculation is exact, taking the ellipsity of the Earth into account. It is also non-singular as both n-vector and p-vector are non-singular (except for the center of the Earth). The default ellipsoid model used is WGS-84, but other ellipsoids/spheres might be specified.

Examples

Example 3: “ECEF-vector to geodetic latitude”

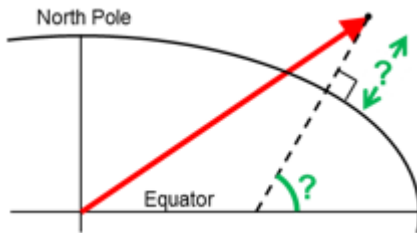

Position B is given as an “ECEF-vector” p_{EB_E} (i.e. a vector from E, the center of the Earth, to B, decomposed in E). Find the geodetic latitude, longitude and height (lat_{EB} , lon_{EB} and h_{EB}), assuming WGS-84 ellipsoid.

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import deg
>>> wgs84 = dict(a=6378137.0, f=1.0/298.257223563)
>>> p_EB_E = 6371e3 * np.vstack((0.9, -1, 1.1)) # m
```

```
>>> n_EB_E, z_EB = nv.p_EB_E2n_EB_E(p_EB_E, **wgs84)
```

```
>>> lat_EB, lon_EB = nv.n_E2lat_lon(n_EB_E)
>>> h = -z_EB
>>> lat, lon = deg(lat_EB), deg(lon_EB)
```

```
>>> msg = 'Ex3: Pos B: lat, lon = {:.2f}, {:.2f} deg, height = {:.2f} m'
>>> msg.format(lat[0], lon[0], h[0])
'Ex3: Pos B: lat, lon = 39.38, -48.01 deg, height = 4702059.83 m'
```

5.2.13 nvector.core.n_EA_E_and_n_EB_E2p_AB_E

n_EA_E_and_n_EB_E2p_AB_E(n_{EA_E} , n_{EB_E} , $z_{EA}=0$, $z_{EB}=0$, $a=6378137$, $f=0.0033528106647474805$, $R_Ee=None$)

Returns the delta vector from position A to B decomposed in E.

Parameters

n_{EA_E} , n_{EB_E} : 3 x n array n-vector(s) [no unit] of position A and B, decomposed in E.

z_{EA} , z_{EB} : 1 x n array Depth(s) [m] of system A and B, relative to the ellipsoid. ($z_{EA} = -\text{height}$, $z_{EB} = -\text{height}$)

a: real scalar, default WGS-84 ellipsoid. Semi-major axis of the Earth ellipsoid given in [m].

f: real scalar, default WGS-84 ellipsoid. Flattening [no unit] of the Earth ellipsoid. If $f=0$ then spherical Earth with radius a is used in stead of WGS-84.

R_Ee [3 x 3 array] rotation matrix defining the axes of the coordinate frame E.

Returns

p_AB_E: 3 x n array Cartesian position vector(s) from A to B, decomposed in E.

See also:

[*n_EA_E and p_AB_E2n_EB_E, p_EB_E2n_EB_E, n_EB_E2p_EB_E*](#)

Notes

The n-vectors for positions A (n_{EA_E}) and B (n_{EB_E}) are given. The output is the delta vector from A to B (p_{AB_E}). The calculation is exact, taking the ellipsity of the Earth into account. It is also non-singular as both n-vector and p-vector are non-singular (except for the center of the Earth). The default ellipsoid model used is WGS-84, but other ellipsoids/spheres might be specified.

Examples

Example 1: “A and B to delta”



Given two positions, A and B as latitudes, longitudes and depths relative to Earth, E.

Find the exact vector between the two positions, given in meters north, east, and down, and find the direction (azimuth) to B, relative to north. Assume WGS-84 ellipsoid. The given depths are from the ellipsoid surface. Use position A to define north, east, and down directions. (Due to the curvature of Earth and different directions to the North Pole, the north, east, and down directions will change (relative to Earth) for different places. A must be outside the poles for the north and east directions to be defined.)

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import rad, deg
```

```
>>> lat_EA, lon_EA, z_EA = rad(1), rad(2), 3
>>> lat_EB, lon_EB, z_EB = rad(4), rad(5), 6
```

Step1: Convert to n-vectors:

```
>>> n_EA_E = nv.lat_lon2n_E(lat_EA, lon_EA)
>>> n_EB_E = nv.lat_lon2n_E(lat_EB, lon_EB)
```

Step2: Find p_AB_E (delta decomposed in E).WGS-84 ellipsoid is default:

```
>>> p_AB_E = nv.n_EA_E_and_n_EB_E2p_AB_E(n_EA_E, n_EB_E, z_EA, z_EB)
```

Step3: Find R_EN for position A:


```
>>> R_EN = nv.n_E2R_EN(n_EA_E)
```

Step4: Find p_AB_N (delta decomposed in N).

```
>>> p_AB_N = np.dot(R_EN.T, p_AB_E).ravel()
>>> valtxt = '{0:8.2f}, {1:8.2f}, {2:8.2f}'.format(*p_AB_N)
>>> 'Ex1: delta north, east, down = {}'.format(valtxt)
'Ex1: delta north, east, down = 331730.23, 332997.87, 17404.27'
```

Step5: Also find the direction (azimuth) to B, relative to north:

```
>>> azimuth = np.arctan2(p_AB_N[1], p_AB_N[0])
>>> 'azimuth = {0:4.2f} deg'.format(deg(azimuth))
'azimuth = 45.11 deg'
```

5.2.14 nvector.core.n_EA_E_and_p_AB_E2n_EB_E

n_EA_E_and_p_AB_E2n_EB_E(*n_EA_E*, *p_AB_E*, *z_EA*=0, *a*=6378137,
f=0.0033528106647474805, *R_Ee*=None)

5.2.15 nvector.core.n_EA_E_and_n_EB_E2azimuth

n_EA_E_and_n_EB_E2azimuth(*n_EA_E*, *n_EB_E*, *a*=6378137, *f*=0.0033528106647474805,
R_Ee=None)

Returns azimuth from A to B, relative to North:

Parameters

n_EA_E, n_EB_E: 3 x n array n-vector(s) [no unit] of position A and B, respectively, decomposed in E.

a: real scalar, default WGS-84 ellipsoid. Semi-major axis of the Earth ellipsoid given in [m].

f: real scalar, default WGS-84 ellipsoid. Flattening [no unit] of the Earth ellipsoid. If *f*==0 then spherical Earth with radius *a* is used in stead of WGS-84.

R_Ee [3 x 3 array] rotation matrix defining the axes of the coordinate frame E.

Returns

azimuth: n array Angle [rad] the line makes with a meridian, taken clockwise from north.

5.2.16 nvector.core.n_EA_E_distance_and_azimuth2n_EB_E

n_EA_E_distance_and_azimuth2n_EB_E(*n_EA_E*, *distance_rad*, *azimuth*, *R_Ee*=None)

Returns position B from azimuth and distance from position A

Parameters

n_EA_E: 3 x n array n-vector(s) [no unit] of position A decomposed in E.

distance_rad: n, array great circle distance [rad] from position A to B


azimuth: n array Angle [rad] the line makes with a meridian, taken clockwise from north.

Returns

n_EB_E: 3 x n array n-vector(s) [no unit] of position B decomposed in E.

Examples

Example 8: “A and azimuth/distance to B”



We have an initial position A, direction of travel given as an azimuth (bearing) relative to north (clockwise), and finally the distance to travel along a great circle given as s_{AB} . Use Earth radius $6371e3$ m to find the destination point B.

In geodesy this is known as “The first geodetic problem” or “The direct geodetic problem” for a sphere, and we see that this is similar to [Example 2³⁵](#), but now the delta is given as an azimuth and a great circle distance. (“The second/inverse geodetic problem” for a sphere is already solved in [Examples 1³⁶](#) and [5³⁷](#).)

Solution:

```
>>> import nvector as nv
>>> from nvector import rad, deg
>>> lat, lon = rad(80), rad(-90)
```

```
>>> n_EA_E = nv.lat_lon2n_E(lat, lon)
>>> azimuth = rad(200)
>>> s_AB = 1000.0 # [m]
>>> r_earth = 6371e3 # [m], mean earth radius
```

```
>>> distance_rad = s_AB / r_earth
>>> n_EB_E = nv.n_EA_E_distance_and_azimuth2n_EB_E(n_EA_E, distance_rad,
↳ azimuth)
>>> lat_EB, lon_EB = nv.n_E2lat_lon(n_EB_E)
>>> lat, lon = deg(lat_EB), deg(lon_EB)
>>> msg = 'Ex8, Destination: lat, lon = {:.4.2f} deg, {:.4.2f} deg'
>>> msg.format(lat[0], lon[0])
'Ex8, Destination: lat, lon = 79.99 deg, -90.02 deg'
```

5.2.17 nvector.core.on_great_circle

on_great_circle (*path, n_EB_E, radius=6371009.0, atol=1e-08*)

Returns True if position B is on great circle through path A.

Parameters

path: tuple of 2 n-vectors 2 n-vectors of positions defining path A, decomposed in E.

n_EB_E: 3 x m array n-vector(s) of position B to check to.

radius: real scalar radius of sphere. (default 6371009.0)

atol: real scalar The absolute tolerance parameter (See notes).

Returns

on [bool array of length max(n, m)] True if position B is on great circle through path A.

³⁵ http://www.navlab.net/nvector/#example_2

³⁶ http://www.navlab.net/nvector/#example_1


³⁷ http://www.navlab.net/nvector/#example_5

Notes

The default value of *atol* is not zero, and is used to determine what small values should be considered close to zero. The default value is appropriate for expected values of order unity. However, *atol* should be carefully selected for the use case at hand. Typically the value should be set to the accepted error tolerance. For GPS data the error ranges from 0.01 m to 15 m.

Examples

Example 10: “Cross track distance”



Path A is given by the two positions A1 and A2 (similar to the previous example).

Find the cross track distance *sxt* between the path A (i.e. the great circle through A1 and A2) and the position B (i.e. the shortest distance at the surface, between the great circle and B).

Also find the Euclidean distance *dxt* between B and the plane defined by the great circle. Use Earth radius 6371e3.

Finally, find the intersection point on the great circle and determine if it is between position A1 and A2.

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import rad, deg
>>> n_EA1_E = nv.lat_lon2n_E(rad(0), rad(0))
>>> n_EA2_E = nv.lat_lon2n_E(rad(10), rad(0))
>>> n_EB_E = nv.lat_lon2n_E(rad(1), rad(0.1))
>>> path = (n_EA1_E, n_EA2_E)
>>> radius = 6371e3 # mean earth radius [m]
>>> s_xt = nv.cross_track_distance(path, n_EB_E, radius=radius)
>>> d_xt = nv.cross_track_distance(path, n_EB_E, method='euclidean',
...                               radius=radius)
```

```
>>> val_txt = '{:4.2f} km, {:4.2f} km'.format(s_xt[0]/1000, d_xt[0]/1000)
>>> 'Ex10: Cross track distance: s_xt, d_xt = {0}'.format(val_txt)
'Ex10: Cross track distance: s_xt, d_xt = 11.12 km, 11.12 km'
```

```
>>> n_EC_E = nv.closest_point_on_great_circle(path, n_EB_E)
>>> np.allclose(nv.on_great_circle_path(path, n_EC_E, radius), True)
True
```

Alternative solution 2:

```
>>> s_xt2 = nv.great_circle_distance(n_EB_E, n_EC_E, radius)
>>> d_xt2 = nv.euclidean_distance(n_EB_E, n_EC_E, radius)
>>> np.allclose(s_xt, s_xt2), np.allclose(d_xt, d_xt2)
(True, True)
```

Alternative solution 3:

```

>>> c_E = nv.great_circle_normal(n_EA1_E, n_EA2_E)
>>> sin_theta = -np.dot(c_E.T, n_EB_E).ravel()
>>> s_xt3 = np.arcsin(sin_theta) * radius
>>> d_xt3 = sin_theta * radius
>>> np.allclose(s_xt, s_xt3), np.allclose(d_xt, d_xt3)
(True, True)

```

5.2.18 nvector.core.on_great_circle_path

on_great_circle_path (*path*, *n_EB_E*, *radius*=6371009.0, *atol*=1e-08)

Returns True if position B is on great circle and between endpoints of path A.

Parameters

path: **tuple of 2 n-vectors** 2 n-vectors of positions defining path A, decomposed in E.

n_EB_E: **3 x m array** n-vector(s) of position B to measure the cross track distance to.

radius: **real scalar** radius of sphere. (default 6371009.0)

atol: **real scalars** The absolute tolerance parameter (See notes).

Returns


on [bool array of length max(n, m)] True if position B is on great circle and between endpoints of path A.

Notes

The default value of *atol* is not zero, and is used to determine what small values should be considered close to zero. The default value is appropriate for expected values of order unity. However, *atol* should be carefully selected for the use case at hand. Typically the value should be set to the accepted error tolerance. For GPS data the error ranges from 0.01 m to 15 m.

Examples

Example 10: “Cross track distance”



Path A is given by the two positions A1 and A2 (similar to the previous example).

Find the cross track distance *sxt* between the path A (i.e. the great circle through A1 and A2) and the position B (i.e. the shortest distance at the surface, between the great circle and B).

Also find the Euclidean distance *dxt* between B and the plane defined by the great circle. Use Earth radius 6371e3.

Finally, find the intersection point on the great circle and determine if it is between position A1 and A2.

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import rad, deg
>>> n_EA1_E = nv.lat_lon2n_E(rad(0), rad(0))
>>> n_EA2_E = nv.lat_lon2n_E(rad(10), rad(0))
>>> n_EB_E = nv.lat_lon2n_E(rad(1), rad(0.1))
>>> path = (n_EA1_E, n_EA2_E)
>>> radius = 6371e3 # mean earth radius [m]
>>> s_xt = nv.cross_track_distance(path, n_EB_E, radius=radius)
>>> d_xt = nv.cross_track_distance(path, n_EB_E, method='euclidean',
...                               radius=radius)
```

```
>>> val_txt = '{:4.2f} km, {:4.2f} km'.format(s_xt[0]/1000, d_xt[0]/1000)
>>> 'Ex10: Cross track distance: s_xt, d_xt = {0}'.format(val_txt)
'Ex10: Cross track distance: s_xt, d_xt = 11.12 km, 11.12 km'
```

```
>>> n_EC_E = nv.closest_point_on_great_circle(path, n_EB_E)
>>> np.allclose(nv.on_great_circle_path(path, n_EC_E, radius), True)
True
```

Alternative solution 2:

```
>>> s_xt2 = nv.great_circle_distance(n_EB_E, n_EC_E, radius)
>>> d_xt2 = nv.euclidean_distance(n_EB_E, n_EC_E, radius)
>>> np.allclose(s_xt, s_xt2), np.allclose(d_xt, d_xt2)
(True, True)
```

Alternative solution 3:

```
>>> c_E = nv.great_circle_normal(n_EA1_E, n_EA2_E)
>>> sin_theta = -np.dot(c_E.T, n_EB_E).ravel()
>>> s_xt3 = np.arcsin(sin_theta) * radius
>>> d_xt3 = sin_theta * radius
>>> np.allclose(s_xt, s_xt3), np.allclose(d_xt, d_xt3)
(True, True)
```

5.3 Rotation matrices and angles

<code>E_rotation([axes])</code>	Returns rotation matrix R_Ee defining the axes of the coordinate frame E.
<code>n_E2R_EN(n_E[, R_Ee])</code>	Returns the rotation matrix R_EN from n-vector.
<code>n_E_and_wa2R_EL(n_E, wander_azimuth[, R_Ee])</code>	Returns rotation matrix R_EL from n-vector and wander azimuth angle.
<code>R_EL2n_E(R_EL)</code>	Returns n-vector from the rotation matrix R_EL.
<code>R_EN2n_E(R_EN)</code>	Returns n-vector from the rotation matrix R_EN.
<code>R2xyz(R_AB)</code>	Returns the angles about new axes in the xyz-order from a rotation matrix.
<code>R2zyx(R_AB)</code>	Returns the angles about new axes in the zxy-order from a rotation matrix.
<code>xyz2R(x, y, z)</code>	Returns rotation matrix from 3 angles about new axes in the xyz-order.
<code>zyx2R(z, y, x)</code>	Returns rotation matrix from 3 angles about new axes in the zyx-order.

5.3.1 nvector.rotation.E_rotation

E_rotation (*axes='e'*)

Returns rotation matrix R_{Ee} defining the axes of the coordinate frame E.

Parameters

axes ['e' or 'E'] defines orientation of the axes of the coordinate frame E. If axes is 'e' then z-axis points to the North Pole along the Earth's rotation axis, x-axis points towards the point where latitude = longitude = 0. If axes is 'E' then x-axis points to the North Pole along the Earth's rotation axis, y-axis points towards longitude +90deg (east) and latitude = 0.

Returns

R_Ee [3 x 3 array] rotation matrix defining the axes of the coordinate frame E as described in Table 2 in Gade (2010).

Notes

R_{Ee} controls the axes of the coordinate frame E (Earth-Centred, Earth-Fixed, ECEF) used by the other functions in this library. It is very common in many fields to choose axes equal to 'e'. If you choose axes equal to 'E' the yz-plane coincides with the equatorial plane. This choice of axis ensures that at zero latitude and longitude, frame N (North-East-Down) has the same orientation as frame E. If roll/pitch/yaw are zero, also frame B (forward-starboard-down) has this orientation. In this manner, the axes of frame E is chosen to correspond with the axes of frame N and B.

References

Gade, K. (2010). A Nonsingular Horizontal Position Representation, The Journal of Navigation, Volume 63, Issue 03, pp 395-417, July 2010.

Examples

```
>>> import numpy as np
>>> import nvector as nv
>>> np.allclose(nv.E_rotation(axes='e'), [[ 0,  0,  1],
...                                     [ 0,  1,  0],
...                                     [-1,  0,  0]])
True
>>> np.allclose(nv.E_rotation(axes='E'), [[ 1.,  0.,  0.],
...                                     [ 0.,  1.,  0.],
...                                     [ 0.,  0.,  1.]])
True
```

5.3.2 nvector.rotation.n_E2R_EN

n_E2R_EN (*n_E, R_Ee=None*)

Returns the rotation matrix R_{EN} from n-vector.

Parameters

n_E: 3 x n array n-vector [no unit] decomposed in E

R_Ee [3 x 3 array] rotation matrix defining the axes of the coordinate frame E.

Returns

R_EN: 3 x 3 x n array The resulting rotation matrix [no unit] (direction cosine matrix).

See also:

[`R\_EN2n\_E, n\_E\_and\_wa2R\_EL, R\_EL2n\_E`](#)

5.3.3 `nvector.rotation.n_E_and_wa2R_EL`

`n_E_and_wa2R_EL` (*n_E*, *wander_azimuth*, *R_Ee=None*)

Returns rotation matrix `R_EL` from n-vector and wander azimuth angle.

Parameters

`n_E`: 3 x n array n-vector [no unit] decomposed in E

`wander_azimuth`: real scalar or array of length n Angle [rad] between L's x-axis and north, positive about L's z-axis.

`R_Ee` [3 x 3 array] rotation matrix defining the axes of the coordinate frame E.

Returns

`R_EL`: 3 x 3 x n array The resulting rotation matrix. [no unit]

See also:

[`R\_EL2n\_E, R\_EN2n\_E, n\_E2R\_EN`](#)

Notes

When `wander_azimuth=0`, we have that $N=L$. (See Table 2 in Gade (2010) for details)

5.3.4 `nvector.rotation.R_EL2n_E`

`R_EL2n_E` (*R_EL*)

Returns n-vector from the rotation matrix `R_EL`.

Parameters

`R_EL`: 3 x 3 x n array Rotation matrix (direction cosine matrix) [no unit]

Returns

`n_E`: 3 x n array n-vector(s) [no unit] decomposed in E.

See also:

[`R\_EN2n\_E, n\_E\_and\_wa2R\_EL, n\_E2R\_EN`](#)

5.3.5 `nvector.rotation.R_EN2n_E`

`R_EN2n_E` (*R_EN*)

Returns n-vector from the rotation matrix `R_EN`.

Parameters

`R_EN`: 3 x 3 x n array Rotation matrix (direction cosine matrix) [no unit]

Returns

`n_E`: 3 x n array n-vector [no unit] decomposed in E.

See also:

[`n\_E2R\_EN, R\_EL2n\_E, n\_E\_and\_wa2R\_EL`](#)

5.3.6 nvector.rotation.R2xyz

R2xyz (*R_AB*)

Returns the angles about new axes in the xyz-order from a rotation matrix.

Parameters

R_AB: 3 x 3 x n array rotation matrix [no unit] (direction cosine matrix) such that the relation between a vector *v* decomposed in A and B is given by: $v_A = \text{mdot}(R_{AB}, v_B)$

Returns

x, y, z: real scalars or array of length n. Angles [rad] of rotation about new axes.

See also:

[*xyz2R*](#), [*R2zyx*](#), [*xyz2R*](#)

Notes

The x, y, z angles are called Euler angles or Tait-Bryan angles and are defined by the following procedure of successive rotations: Given two arbitrary coordinate frames A and B. Consider a temporary frame T that initially coincides with A. In order to make T align with B, we first rotate T an angle x about its x-axis (common axis for both A and T). Secondly, T is rotated an angle y about the NEW y-axis of T. Finally, T is rotated an angle z about its NEWEST z-axis. The final orientation of T now coincides with the orientation of B.

The signs of the angles are given by the directions of the axes and the right hand rule.

See also: https://en.wikipedia.org/wiki/Aircraft_principal_axes https://en.wikipedia.org/wiki/Euler_angles
https://en.wikipedia.org/wiki/Axes_conventions

5.3.7 nvector.rotation.R2zyx

R2zyx (*R_AB*)

Returns the angles about new axes in the zxy-order from a rotation matrix.

Parameters

R_AB: 3x3 array rotation matrix [no unit] (direction cosine matrix) such that the relation between a vector *v* decomposed in A and B is given by: $v_A = \text{np.dot}(R_{AB}, v_B)$

Returns

z, y, x: real scalars Angles [rad] of rotation about new axes.

See also:

[*zyx2R*](#), [*xyz2R*](#), [*R2xyz*](#)

Notes

The z, x, y angles are called Euler angles or Tait-Bryan angles and are defined by the following procedure of successive rotations: Given two arbitrary coordinate frames A and B. Consider a temporary frame T that initially coincides with A. In order to make T align with B, we first rotate T an angle z about its z-axis (common axis for both A and T). Secondly, T is rotated an angle y about the NEW y-axis of T. Finally, T is rotated an angle x about its NEWEST x-axis. The final orientation of T now coincides with the orientation of B.

The signs of the angles are given by the directions of the axes and the right hand rule.

Note that if A is a north-east-down frame and B is a body frame, we have that z=yaw, y=pitch and x=roll.

See also: https://en.wikipedia.org/wiki/Aircraft_principal_axes https://en.wikipedia.org/wiki/Euler_angles
https://en.wikipedia.org/wiki/Axes_conventions

5.3.8 nvector.rotation.xyz2R

xyz2R (*x*, *y*, *z*)

Returns rotation matrix from 3 angles about new axes in the xyz-order.

Parameters

x,y,z: real scalars or array of lengths *n* Angles [rad] of rotation about new axes.

Returns

R_AB: 3 x 3 x *n* array rotation matrix [no unit] (direction cosine matrix) such that the relation between a vector *v* decomposed in A and B is given by: $v_A = \text{mdot}(R_{AB}, v_B)$

See also:

R2xyz, zyx2R, R2zyx

Notes

The rotation matrix *R_AB* is created based on 3 angles *x,y,z* about new axes (intrinsic) in the order x-y-z. The angles are called Euler angles or Tait-Bryan angles and are defined by the following procedure of successive rotations: Given two arbitrary coordinate frames A and B. Consider a temporary frame T that initially coincides with A. In order to make T align with B, we first rotate T an angle *x* about its x-axis (common axis for both A and T). Secondly, T is rotated an angle *y* about the NEW y-axis of T. Finally, T is rotated an angle *z* about its NEWEST z-axis. The final orientation of T now coincides with the orientation of B.

The signs of the angles are given by the directions of the axes and the right hand rule.

See also:

https://en.wikipedia.org/wiki/Aircraft_principal_axes https://en.wikipedia.org/wiki/Euler_angles https://en.wikipedia.org/wiki/Axes_conventions

5.3.9 nvector.rotation.zyx2R

zyx2R (*z*, *y*, *x*)

Returns rotation matrix from 3 angles about new axes in the zyx-order.

Parameters

z, y, x: real scalars or arrays of lengths *n* Angles [rad] of rotation about new axes.

Returns

R_AB: 3 x 3 x *n* array rotation matrix [no unit] (direction cosine matrix) such that the relation between a vector *v* decomposed in A and B is given by: $v_A = \text{mdot}(R_{AB}, v_B)$

See also:

R2zyx, xyz2R, R2xyz

Notes

The rotation matrix R_{AB} is created based on 3 angles z, y, x about new axes (intrinsic) in the order $z-y-x$. The angles are called Euler angles or Tait-Bryan angles and are defined by the following procedure of successive rotations: Given two arbitrary coordinate frames A and B. Consider a temporary frame T that initially coincides with A. In order to make T align with B, we first rotate T an angle z about its z -axis (common axis for both A and T). Secondly, T is rotated an angle y about the NEW y -axis of T. Finally, T is rotated an angle x about its NEWEST x -axis. The final orientation of T now coincides with the orientation of B.

The signs of the angles are given by the directions of the axes and the right hand rule.

Note that if A is a north-east-down frame and B is a body frame, we have that z =yaw, y =pitch and x =roll.

See also: https://en.wikipedia.org/wiki/Aircraft_principal_axes https://en.wikipedia.org/wiki/Euler_angles https://en.wikipedia.org/wiki/Axes_conventions

Examples

Suppose the yaw angle between coordinate system A and B is 45 degrees. Convert position $p1_b = (1, 0, 0)$ in B to a point in A. Convert position $p2_a = (0, 1, 0)$ in A to a point in B.

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> x, y, z = nv.rad(0, 0, 45)
>>> R_AB = nv.zyx2R(z, y, x)
```

```
>>> p1_b = np.atleast_2d((1, 0, 0)).T
>>> p1_a = nv.mdot(R_AB, p1_b)
>>> np.allclose(p1_a, [[0.7071067811865476], [0.7071067811865476], [0.0]])
True
```

```
>>> p2_a = np.atleast_2d((0, 1, 0)).T
>>> p2_b = nv.mdot(R_AB.T, p2_a)
>>> np.allclose(p2_b, [[0.7071067811865476], [0.7071067811865476], [0.0]])
True
```

5.4 Utility functions

<code>deg(*rad_angles)</code>	Converts angle in radians to degrees.
<code>mdot(a, b)</code>	Returns multiple matrix multiplications of two arrays i.e. $\text{dot}(a, b)[i,j,k] = \text{sum}(a[i,:j] * b[:,j,k])$.
<code>nthroot(x, n)</code>	Returns the n 'th root of x to machine precision
<code>rad(*deg_angles)</code>	Converts angle in degrees to radians.
<code>get_ellipsoid(name)</code>	Returns semi-major axis (a), flattening (f) and name of ellipsoid as a named tuple.
<code>select_ellipsoid(*args, **kwds)</code>	<code>select_ellipsoid</code> is deprecated, use <code>get_ellipsoid</code> instead!
<code>unit(vector[, norm_zero_vector])</code>	Convert input vector to a vector of unit length.

5.4.1 nvector.util.deg

deg (*rad_angles)

Converts angle in radians to degrees.

Parameters

rad_angles: angle in radians

Returns

deg_angles: angle in degrees

See also:

rad

Examples

```
>>> import numpy as np
>>> import nvector as nv
>>> nv.deg(np.pi/2)
90.0
>>> nv.deg(np.pi/2, [0, np.pi])
(90.0, array([ 0., 180.]))
```

5.4.2 nvector.util.mdot

mdot (a, b)

Returns multiple matrix multiplications of two arrays i.e. $\text{dot}(a, b)[i,j,k] = \sum(a[i,:,j] * b[:,j,k])$

Parameters

a [array_like] First argument.

b [array_like] Second argument.

See also:

`numpy.einsum`³⁸

Notes

if a and b have the same shape this is the same as

`np.concatenate([np.dot(a[... ,i], b[... ,i])[ :, :, None] for i in range(n)], axis=2)`

Examples

3 x 3 x 2 times 3 x 3 x 2 array -> 3 x 2 x 2 array

```
>>> import numpy as np
>>> import nvector as nv
>>> a = 1.0 * np.arange(18).reshape(3,3,2)
>>> b = - a
>>> t = np.concatenate([np.dot(a[... ,i], b[... ,i])[ :, :, None]
...                       for i in range(2)], axis=2)
>>> tm = nv.mdot(a, b)
```

(continues on next page)

³⁸ <https://numpy.org/doc/stable/reference/generated/numpy.einsum.html#numpy.einsum>

(continued from previous page)

```
>>> tm.shape
(3, 3, 2)
>>> np.allclose(t, tm)
True
```

3 x 3 x 2 times 3 x 1 array -> 3 x 1 x 2 array

```
>>> t1 = np.concatenate([np.dot(a[... , i], b[:, 0, 0][:, None])[:, :, None]
...                       for i in range(2)], axis=2)
```

```
>>> tm1 = nv.mdot(a, b[:, 0, 0].reshape(-1, 1))
>>> tm1.shape
(3, 1, 2)
>>> np.allclose(t1, tm1)
True
```

3 x 3 times 3 x 3 array -> 3 x 3 array

```
>>> tt0 = nv.mdot(a[... , 0], b[... , 0])
>>> tt0.shape
(3, 3)
>>> np.allclose(t[... , 0], tt0)
True
```

3 x 3 times 3 x 1 array -> 3 x 1 array

```
>>> tt0 = nv.mdot(a[... , 0], b[:, :1, 0])
>>> tt0.shape
(3, 1)
>>> np.allclose(t[:, :1, 0], tt0)
True
```

3 x 3 times 3 x 1 x 2 array -> 3 x 1 x 2 array

```
>>> tt0 = nv.mdot(a[... , 0], b[:, :2, 0][:, None])
>>> tt0.shape
(3, 1, 2)
>>> np.allclose(t[:, :2, 0][:, None], tt0)
True
```

5.4.3 nvector.util.nthroot

nthroot (*x*, *n*)Returns the *n*'th root of *x* to machine precision**Parameters****x, n**

Examples

```
>>> import numpy as np
>>> import nvector as nv
>>> np.allclose(nv.nthroot(27.0, 3), 3.0)
True
```

5.4.4 nvector.util.rad

rad(*deg_angles)

Converts angle in degrees to radians.

Parameters

deg_angles: angle in degrees

Returns

rad_angles: angle in radians

See also:

[deg](#)

Examples

```
>>> import numpy as np
>>> import nvector as nv
>>> nv.deg(nv.rad(90))
90.0
>>> nv.deg(*nv.rad(90, [0, 180]))
(90.0, array([ 0., 180.]))
```

5.4.5 nvector.util.get_ellipsoid

get_ellipsoid(name)

Returns semi-major axis (a), flattening (f) and name of ellipsoid as a named tuple.

Parameters

name [string] name of ellipsoid. Valid options are: 1) Airy 1858 2) Airy Modified 3) Australian National 4) Bessel 1841 5) Clarke 1880 6) Everest 1830 7) Everest Modified 8) Fisher 1960 9) Fisher 1968 10) Hough 1956 11) International (Hayford)/European Datum (ED50) 12) Krassovsky 1938 13) NWL-9D (WGS 66) 14) South American 1969 15) Soviet Geod. System 1985 16) WGS 72 17) Clarke 1866 (NAD27) 18) GRS80 / WGS84 (NAD83) 19) ETRS89

Examples

```
>>> import nvector as nv
>>> nv.get_ellipsoid(name='wgs84')
Ellipsoid(a=6378137.0, f=0.0033528106647474805, name='GRS80 / WGS84 (NAD83)')
>>> nv.get_ellipsoid(name='GRS80')
Ellipsoid(a=6378137.0, f=0.0033528106647474805, name='GRS80 / WGS84 (NAD83)')
>>> nv.get_ellipsoid(name='NAD83')
Ellipsoid(a=6378137.0, f=0.0033528106647474805, name='GRS80 / WGS84 (NAD83)')
>>> nv.get_ellipsoid(name=18)
Ellipsoid(a=6378137.0, f=0.0033528106647474805, name='GRS80 / WGS84 (NAD83)')
```

```
>>> wgs72 = nv.select_ellipsoid(name="WGS 72")
>>> wgs72.a == 6378135.0
True
>>> wgs72.f == 0.003352779454167505
True
>>> wgs72.name
'WGS 72'
>>> wgs72 == (6378135.0, 0.003352779454167505, 'WGS 72')
True
```

5.4.6 nvector.util.select_ellipsoid

select_ellipsoid(*args, **kws)

select_ellipsoid is deprecated, use *get_ellipsoid* instead!

Returns semi-major axis (a), flattening (f) and name of ellipsoid as a named tuple.

Parameters

name [string] name of ellipsoid. Valid options are: 1) Airy 1858 2) Airy Modified 3) Australian National 4) Bessel 1841 5) Clarke 1880 6) Everest 1830 7) Everest Modified 8) Fisher 1960 9) Fisher 1968 10) Hough 1956 11) International (Hayford)/European Datum (ED50) 12) Krassovsky 1938 13) NWL-9D (WGS 66) 14) South American 1969 15) Soviet Geod. System 1985 16) WGS 72 17) Clarke 1866 (NAD27) 18) GRS80 / WGS84 (NAD83) 19) ETRS89

Examples

```
>>> import nvector as nv
>>> nv.get_ellipsoid(name='wgs84')
Ellipsoid(a=6378137.0, f=0.0033528106647474805, name='GRS80 / WGS84 (NAD83)')
>>> nv.get_ellipsoid(name='GRS80')
Ellipsoid(a=6378137.0, f=0.0033528106647474805, name='GRS80 / WGS84 (NAD83)')
>>> nv.get_ellipsoid(name='NAD83')
Ellipsoid(a=6378137.0, f=0.0033528106647474805, name='GRS80 / WGS84 (NAD83)')
>>> nv.get_ellipsoid(name=18)
Ellipsoid(a=6378137.0, f=0.0033528106647474805, name='GRS80 / WGS84 (NAD83)')
```

```
>>> wgs72 = nv.select_ellipsoid(name="WGS 72")
>>> wgs72.a == 6378135.0
True
>>> wgs72.f == 0.003352779454167505
True
>>> wgs72.name
'WGS 72'
>>> wgs72 == (6378135.0, 0.003352779454167505, 'WGS 72')
True
```

5.4.7 nvector.util.unit

unit (*vector*, *norm_zero_vector=1*)

Convert input vector to a vector of unit length.

Parameters

vector [3 x m array] m column vectors

Returns

unitvector [3 x m array] normalized unitvector(s) along axis==0.

Notes

The column vector(s) that have zero length will be returned as unit vector(s) pointing in the x-direction, i.e, [[1], [0], [0]]

Examples

```
>>> import numpy as np
>>> import nvector as nv
>>> np.allclose(nv.unit([[1, 0], [1, 0], [1, 0]]), [[ 0.57735027, 1],
...                                                [ 0.57735027, 0],
...                                                [ 0.57735027, 0]])
True
```


CHANGELOG

A.1 Version 0.7.6, December 18, 2020

Per A Brodtkorb (30):

- Renamed `_core.py` to `core.py`
- Removed the module index from the appendix because it was incomplete.
- Removed `nvector.tests` package from the reference chapter.
- Added `indent` function to `_common.py` to avoid failure on python 2.7.
- Moved `isclose`, `allclose` and `array_to_list_dict` from `objects.py` to `util.py`
- **Moved the following function from `test_nvector.py` to `test_rotation.py`:**
 - `test_n_E_and_wa2R_EL`, `test_R2zxy`, `test_R2zxy_x90`, `test_R2zxy_y90`
 - `test_R2zxy_z90`, `test_R2zxy_0`, `test_R2xyz` `test_R2xyz_with_vectors`
- Replaced `assert_array_almost_equal` with `assert_allclose` in `test_objects.py`
- Renamed `test_frames.py` to `test_objects.py`
- Added missing functions `great_circle_normal` and `interpolate` to the `nvector_summary.rst`
- **Moved the following functions related to rotation matrices from `_core` to rotation module:**
 - `E_rotation`, `n_E_and_wa2R_EL`, `n_E2R_EN`, `R_EL2n_E`, `R_EN2n_E`, `R2xyz`, `R2zyx`, `xyz2R`, `zyx2R`
- Renamed `select_ellipsoid` to `get_ellipsoid`
- **Moved the following utility functions from `_core` to `util` module:**
 - `deg`, `rad`, `mdot`, `nthroot`, `get_ellipsoid`, `unit`, `_check_length_deviation`
- Added `_get_h1line` and `_make_summary` to `_common.py`
- Replaced `numpy.rollaxis` with `numpy.swapaxes` to make the code clearer.
- `_atleast_3d` now broadcast the input against each other.
- Added examples to `zyx2R`
- **Added the following references to `zyx2R`, `xyz2R`, `R2xyz`, `R2zyx`:**
 - https://en.wikipedia.org/wiki/Aircraft_principal_axes
 - https://en.wikipedia.org/wiki/Euler_angles
 - https://en.wikipedia.org/wiki/Axes_conventions
- Removed tabs from `CHANGELOG.rst`
- Updated `CHANGELOG.rst` and prepared for release v0.7.6
- Fixed the documentation so that it shows correctly in the reference manual.

- Added logo.png and docs/reference/nvector.rst
- Updated build_package.py so it generates a valid README.rst file.
- Updated THANKS.rst
- Updated CHANGELOG.rst and prepare for release 0.7.6
- Added Nvector documentation ref <https://nvector.readthedocs.io/en/v0.7.5> to refs1.bib and _acknowledgements.py
- Updated README.rst
- Renamed requirements.readthedocs.txt to docs/requirements.txt
- Added .readthedocs.yml
- Added sphinxcontrib-bibtex to requirements.readthedocs.txt
- Added missing docs/tutorials/images/ex3img.png
- Deleted obsolete ex10img.png
- Updated acknowledgement with reference to Karney's article.
- Updated README.rst by moving acknowledgement to the end with references.
- Renamed position input argument to point in the FrameN, FrameB and FrameL classes.
- Deleted _example_images.py
- Renamed nvector.rst to nvector_summary.rst in docs/reference
- Added example images to tutorials/images/ folder
- Added Nvector logo, install.rst to docs
- Added src/nvector/_example_images.py
- Added docs/tutorials/whatsnext.rst
- **Reorganized the documentation in docs by splitting _info.py into:**
 - _intro.py,
 - _documentation.py
 - _examples_object_oriented.py
 - _images.py
 - _installation.py and _acknowledgements.py
- Added docs/tutorials/index.rst, docs/intro/index.rst, docs/how-to/index.rst docs/appendix/index.rst and docs/make.bat
- updated references.

A.2 Version 0.7.5, December 12, 2020

Per A Brodtkorb (32):

- Updated CHANGELOG.rst and prepare for release 0.7.5
- **Changed so that GeoPath.on_great_circle and GeoPath.on_great_circle** returns scalar result if the two points defining the path are scalars. See issue #10.
- Fixed failing doctests.
- Added doctest configuration to docs/conf.py
- Added allclose to nvector/objects.py

- **Added `array_to_list_dict` and `isclose` functions in `nvector.objects.py`** Replaced f-string in the `__repr__` method of the `_Common` class in `nvector.objects.py` with `format` in order to work on python version 3.5 and below.
- Made `nvector.plot.py` more robust.
- Removed `rtol` parameter from the `on_greatcircle` function. See issue #12 for a discussion.
- Added `nvector` solution to the `GeoPoint.displace` method.
- Updated `docs/conf.py`
- Updated `README.rst` and `LICENSE.txt`
- Replaced `import unittest` with `import pytest` in `test_frames.py`
- **Fixed issue #10: Inconsistent return types in `GeoPath.track_distance`:**
 - `GeoPath`, `GeoPoint`, `Nvector` and `ECEFvector` and `Pvector` now return scalars for the case where the input is not actually arrays of points but just single objects.
- Added extra tests for issue #10 and updated old tests and the examples in the help headers.
- Vectorized `FrameE.inverse` and `FrameE.direct` methods.
- Extended `deg` and `rad` functions in `_core.py`.
- Vectorized `GeoPoint.distance_and_azimuth`
- Made import of `cartopy` in `nvector.plot` more robust.
- Updated `test_Ex10_cross_track_distance`
- Updated `sonar-project.properties`
- Replaced deprecated `sonar.XXXX.reportPath` with `sonar.XXXX.reportPaths`
- Simplified `nvector/_core.__doc__`
- Updated `.travis.yml`
- Changed the definition of `sonar` addon
- Added `CC_TEST_REPORTER_ID` to `.travis.yml`
- Added python 3.8 to the CI testing.
- Changed so that `setup.py` is python 2.7 compatible again.
- Updated `build_package.py`
- Renamed `CHANGES.rst` to `CHANGELOG.rst`
- Updated `setup.cfg` and `setup.py`
- Added `license.py`
- Updated `build_package.py`
- Removed `conda-build` from `.travis.yml`
- Attempt to get `travis` to run the tests again. . . .
- API change: replaced “python `setup.py` doctests” with “python `setup.py` doctest”
- Added doctest example to `nvector._core._atleast_3d` Made `xyz2R` and `zyx2R` code simpler.
- Replaced deprecated `Nvector.mean_horizontal_position` with `Nvector.mean` in `test_frames.py`
- Added `mdot` to `__all__` in `nvector/_core.py` and in documentation summary.
- Sorted the the documentation summary by function name in `nvector.rst`
- Removed `-pyargs nvector -doctest-modules -pep8` from `addopts` section in `setup.cfg`
- Updated documentation and added missing documentation.

A.3 Version 0.7.4, June 4, 2019

Per A Brodtkorb (2):

- Fixed PyPi badge and added downloads badge in `nvector/_info.py` and `README.rst`
- Removed obsolete and wrong badges from `docs/index.rst`

A.4 Version 0.7.3, June 4, 2019

Per A Brodtkorb (6):

- Renamed `LICENSE.txt` and `THANKS.txt` to `LICENSE.rst` and `THANKS.rst`
- Updated `README.rst` and `nvector/_info.py`
- Fixed issue 7# incorrect test for `test_n_E_and_wa2R_EL`.
- Removed coveralls test coverage report.
- Replaced coverage badge from coveralls to codecov.
- Updated code-climate reporter.
- Simplified duplicated code in `nvector._core`.
- Added `tests/__init__.py`
- Added “-pyargs nvector” to pytest options in `setup.cfg`
- Exclude `build_package.py` from distribution in `MANIFEST.in`
- Replaced `health_img` from `landscape` to `codeclimate`.
- Updated travis to explicitly install `pytest-cov` and `pytest-pep8`
- Removed dependence on `pyscaffold`
- Added `MANIFEST.in`
- Renamed `set_package_version.py` to `build_package.py`

A.5 Version 0.7.0, June 2, 2019

Gary van der Merwe (1):

- Add `interpolate` to `__all__` so that it can be imported

Per A Brodtkorb (26):

- Updated `long_description` in `setup.cfg`
- Replaced deprecated `sphinx.ext.pngmath` with `sphinx.ext.imgmath`
- Added `imgmath` to requirements for building the docs.
- Fixing shallow clone warning.
- **Replaced property ‘`sonar.python.coverage.itReportPath`’ with ‘`sonar.python.coverage.reportPaths`’** instead, because it has been removed.
- Drop python 3.4 support
- Added python 3.7 support
- Fixed a bug: Mixed scalars and `np.array([1])` values don’t work with `np.rad2deg` function.

- **Added ETRS ELLIPSOID in _core.py** Added ED50 as alias for International (Hayford)/European Datum in _core.py Added sad69 as alias for South American 1969 in _core.py
- Simplified docstring for nv.test
- Generalized the setup.py.
- Replaced aliases with the correct names in setup.cfg.

A.6 Version 0.6.0, December 9, 2018

Per A Brodtkorb (79):

- Updated requirements in setup.py
- Removed tox.ini
- Updated documentation on how to set package version
- Made a separate script to set package version in nvector/__init__.py
- Updated docstring for select_ellipsoid
- Replace GeoPoint.geo_point with GeoPoint.displace and removed deprecated GeoPoint.geo_point
- Update .travis.yml
- Fix so that codeclimate is able to parse .travis.yml
- Only run sonar and codeclimate reporter for python v3.6
- Added sonar-project.properties
- **Pinned coverage to v4.3.4 due to fact that codeclimate reporter is only** compatible with Coverage.py versions $\geq 4.0, < 4.4$.
- Updated with sonar scanner.
- Added .pylintrc
- Set up codeclimate reporter
- Updated docstring for unit function.
- Avoid division by zero in unit function.
- Reenabled the doctest of plot_mean_position
- Reset “pyscaffold==2.5.11”
- Replaced deprecated basemap with cartopy.
- **Replaced doctest of plot_mean_position with test_plot_mean_position in** test_plot.py
- **Fixed failing doctests for python v3.4 and v3.5 and made them more** robust.
- Fixed failing doctests and made them more robust.
- Increased pycoverage version to use.
- moved nvector to src/nvector/
- **Reset the setup.py to require ‘pyscaffold==2.5.11’ which works on** python version 3.4, 3.5 and 3.6. as well as 2.7
- Updated unittests.
- Updated tests.
- Removed obsolete code

- Added test for delta_L
- **Added corner testcase for** `pointA.displace(distance=1000,azimuth=np.deg2rad(200))`
- Added test for `path.track_distance(method='exact')`
- **Added delta_L a function that return cartesian delta vector from** positions A to B decomposed in L.
- Simplified OO-solution in example 1 by using delta_N function
- Refactored duplicated code
- **Vectorized code so that the frames can take more than one position at** the time.
- Keeping only the html docs in the distribution.
- **replaced link from latest to stable docs on readthedocs and updated** crosstrack distance test.
- updated documentation in setup.py

A.7 Version 0.5.2, March 7, 2017

Per A Brodtkorb (10):

- Fixed tests in tests/test_frames.py
- Updated to setup.cfg and tox.ini + pep8
- updated .travis.yml
- Updated Readme.rst with new example 10 picture and link to nvector docs at readthedocs.
- updated official documentation links
- Updated crosstrack distance tests.

A.8 Version 0.5.1, March 5, 2017

Cody (4):

- Explicitly numbered replacement fields
- Migrated % string formatting

Per A Brodtkorb (29):

- pep8
- Updated failing examples
- Updated README.rst
- Removed obsolete pass statement
- Documented functions
- added .checkignore for quantifyscode
- moved test_docstrings and use_docstring_from into _common.py
- Added .codeclimate.yml
- Updated installation information in _info.py
- Added GeoPath.on_path method. Clarified intersection example
- Added great_circle_normal, cross_track_distance
- Renamed intersection to intersect (Intersection is deprecated.)

- Simplified R2zyx with a call to R2xyz Improved accuracy for great circle cross track distance for small distances.
- Added `_on_great_circle`, `_on_great_circle_path`, `_on_ellipsoid_path`, `closest_point_on_great_circle` and `closest_point_on_path` to `GeoPath`
- made `__eq__` more robust for frames
- Removed duplicated code
- Updated tests
- Removed fishy test
- replaced zero n-vector with nan
- Commented out failing test.
- Added example 10 image
- Added `'closest_point_on_great_circle'`, `'on_great_circle'`, `'on_great_circle_path'`.
- Updated examples + documentation
- Updated index depth
- Updated README.rst and classifier in setup.cfg

A.9 Version 0.4.1, January 19, 2016

pbrod (46):

- Cosmetic updates
- Updated README.rst
- updated docs and removed unused code
- updated README.rst and .coveragerc
- Refactored out `_check_frames`
- Refactored out `_default_frame`
- Updated .coveragerc
- Added link to geographiclib
- Updated external link
- Updated documentation
- Added figures to examples
- Added `GeoPath.interpolate` + interpolation example 6
- Added links to FFI homepage.
- **Updated documentation:**
 - Added link to nvector toolbox for matlab
 - For each example added links to the more detailed explanation on the homepage
- Updated link to nvector toolbox for matlab
- Added link to nvector on pypi
- Updated documentation fro `FrameB`, `FrameE`, `FrameL` and `FrameN`.
- updated `__all__` variable
- Added missing `R_Ee` to function `n_EA_E_and_n_EB_E2azimuth` + updated documentation

- Updated CHANGES.rst
- Updated conf.py
- Renamed info.py to _info.py
- All examples are now generated from _examples.py.

A.10 Version 0.1.3, January 1, 2016

pbrod (31):

- Refactored
- Updated tests
- Updated docs
- Moved tests to nvector/tests
- Updated .coverage Added travis.yml, .landscape.yml
- Deleted obsolete LICENSE
- Updated README.rst
- Removed ngs version
- Fixed bug in .travis.yml
- Updated .travis.yml
- Removed dependence on navigator.py
- Updated README.rst
- Updated examples
- Deleted skeleton.py and added tox.ini
- Renamed distance_rad_bearing_rad2point to n_EA_E_distance_and_azimuth2n_EB_E
- Renamed azimuth to n_EA_E_and_n_EB_E2azimuth
- Added tests for R2xyz as well as R2zyx
- Removed backward compatibility
- Added test_n_E_and_wa2R_EL
- Refactored tests
- Commented out failing tests on python 3+
- updated CHANGES.rst
- Removed bug in setup.py

A.11 Version 0.1.1, January 1, 2016

pbrod (31):

- Initial commit: Translated code from Matlab to Python.
- Added object oriented interface to nvector library
- Added tests for object oriented interface
- Added geodesic tests.

DEVELOPERS

- Kenneth Gade, FFI
- Kristian Svartveit, FFI
- Brita Hafskjold Gade, FFI
- Per A. Brodtkorb FFI

LICENSE

The content of this library **is** based on the following publication:

Gade, K. (2010). A Nonsingular Horizontal Position Representation, The Journal of Navigation, Volume 63, Issue 03, pp 395-417, July 2010.
(www.navlab.net/Publications/A_Nonsingular_Horizontal_Position_Representation.pdf)

This paper should be cited **in** publications using this library.

Copyright (c) 2015-2020, Norwegian Defence Research Establishment (FFI)
All rights reserved.

Redistribution **and** use **in** source **and** binary forms, **with or** without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above publication information, copyright notice, this **list** of conditions **and** the following disclaimer.

2. Redistributions **in** binary form must reproduce the above publication information, copyright notice, this **list** of conditions **and** the following disclaimer **in** the documentation **and/or** other materials provided **with** the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

ACKNOWLEDGMENTS

The `nvector` package³⁹ for Python⁴⁰ was written by Per A. Brodtkorb at FFI (The Norwegian Defence Research Establishment)⁴¹ based on the `nvector toolbox`⁴² for Matlab⁴³ written by the navigation group at FFI⁴⁴. The `nvector.core` and `nvector.rotation` module is a vectorized reimplementation of the matlab `nvector toolbox` while the `nvector.objects` module is a new easy to use object oriented user interface to the `nvector` core functionality documented in [GB20].

Most of the content is based on the article by K. Gade [Gad10].

Thus this article should be cited in publications using this page or downloaded program code.

However, if you use any of the `FrameE.direct`, `FrameE.inverse`, `GeoPoint.distance_and_azimuth` or `GeoPoint.displace` methods you should also cite the article by Karney [Kar13] because these methods call Karney's `geographiclib`⁴⁵ library to do the calculations.

³⁹ <http://pypi.python.org/pypi/nvector/>

⁴⁰ <https://www.python.org/>

⁴¹ <http://www.ffi.no/en>

⁴² <http://www.navlab.net/nvector/#download>

⁴³ <http://www.mathworks.com>

⁴⁴ <http://www.ffi.no/en>

⁴⁵ <https://pypi.python.org/pypi/geographiclib>

BIBLIOGRAPHY

- [Gad10] Kenneth Gade. A nonsingular horizontal position representation. *The Journal of Navigation*, 63(3):395–417, 2010. URL: http://www.navlab.net/Publications/A_Nonsingular_Horizontal_Position_Representation.pdf.
- [Gad16] Kenneth Gade. The seven ways to find heading. *The Journal of Navigation*, 69():955–970, 2016. URL: https://www.navlab.net/Publications/The_Seven_Ways_to_Find_Heading.pdf.
- [Gad18] Kenneth Gade. *Inertial Navigation - Theory and Applications*. PhD thesis, Norwegian University of Science and Technology, 1 2018. ISBN 978-82-326-2871-1. URL: https://www.navlab.net/Publications/Inertial_Navigation_-_Theory_and_Applications.pdf.
- [GB20] Kenneth Gade and Per A. Brodtkorb. Nvector documentation for python. Online user manual., 2020. URL: <https://nvector.readthedocs.io/en/v0.7.6>.
- [Kar13] C. F. F. Karney. Algorithms for geodesics. *Journal of Geodesy*, 87(1):43–55, 2013. URL: <https://rdcu.be/cgccgm>.

Symbols

__init__() (*ECEFvector method*), 34
 __init__() (*FrameB method*), 35
 __init__() (*FrameE method*), 36
 __init__() (*FrameL method*), 38
 __init__() (*FrameN method*), 38
 __init__() (*GeoPath method*), 42
 __init__() (*GeoPoint method*), 43
 __init__() (*Nvector method*), 45
 __init__() (*Pvector method*), 45

C

closest_point_on_great_circle() (*in module nvector.core*), 47
 cross_track_distance() (*in module nvector.core*), 48

D

deg() (*in module nvector.util*), 69
 delta_E() (*in module nvector.objects*), 29
 delta_L() (*in module nvector.objects*), 31
 delta_N() (*in module nvector.objects*), 31
 diff_positions() (*in module nvector.objects*), 31

E

E_rotation() (*in module nvector.rotation*), 64
 ECEFvector (*class in nvector.objects*), 32
 euclidean_distance() (*in module nvector.core*), 49

F

FrameB (*class in nvector.objects*), 34
 FrameE (*class in nvector.objects*), 36
 FrameL (*class in nvector.objects*), 38
 FrameN (*class in nvector.objects*), 37

G

GeoPath (*class in nvector.objects*), 39
 GeoPoint (*class in nvector.objects*), 43
 get_ellipsoid() (*in module nvector.util*), 71
 great_circle_distance() (*in module nvector.core*), 50
 great_circle_normal() (*in module nvector.core*), 52

I

interpolate() (*in module nvector.core*), 52
 intersect() (*in module nvector.core*), 52

L

lat_lon2n_E() (*in module nvector.core*), 53

M

mdot() (*in module nvector.util*), 69
 mean_horizontal_position() (*in module nvector.core*), 54
 module
 nvector._acknowledgements, 89
 nvector._examples_object_oriented, 6
 nvector._images, 3
 nvector._info_functional, 13
 nvector._installation, 5
 nvector._intro, 3

N

n_E2lat_lon() (*in module nvector.core*), 55
 n_E2R_EN() (*in module nvector.rotation*), 64
 n_E_and_wa2R_EL() (*in module nvector.rotation*), 65
 n_EA_E_and_n_EB_E2azimuth() (*in module nvector.core*), 59
 n_EA_E_and_n_EB_E2p_AB_E() (*in module nvector.core*), 57
 n_EA_E_and_p_AB_E2n_EB_E() (*in module nvector.core*), 59
 n_EA_E_distance_and_azimuth2n_EB_E() (*in module nvector.core*), 59
 n_EB_E2p_EB_E() (*in module nvector.core*), 55
 nthroot() (*in module nvector.util*), 70
 Nvector (*class in nvector.objects*), 44
 nvector._acknowledgements
 module, 89
 nvector._examples_object_oriented
 module, 6
 nvector._images
 module, 3
 nvector._info_functional
 module, 13
 nvector._installation
 module, 5

`nvector._intro`
module, [3](#)

O

`on_great_circle()` (in module *nvector.core*), [60](#)
`on_great_circle_path()` (in module *nvector.core*), [62](#)

P

`p_EB_E2n_EB_E()` (in module *nvector.core*), [56](#)
`Pvector` (class in *nvector.objects*), [45](#)

R

`R2xyz()` (in module *nvector.rotation*), [66](#)
`R2zyx()` (in module *nvector.rotation*), [66](#)
`R_EL2n_E()` (in module *nvector.rotation*), [65](#)
`R_EN2n_E()` (in module *nvector.rotation*), [65](#)
`rad()` (in module *nvector.util*), [71](#)

S

`select_ellipsoid()` (in module *nvector.util*), [72](#)

U

`unit()` (in module *nvector.util*), [73](#)

X

`xyz2R()` (in module *nvector.rotation*), [67](#)

Z

`zyx2R()` (in module *nvector.rotation*), [67](#)