
nvector Documentation

Release 0.7.3

Kenneth Gade and Per A Brodtkorb

Jun 04, 2019

1	Contents	3
1.1	Introduction to Nvector	3
1.2	Description	3
1.3	Documentation and code	3
1.4	Installation	4
1.5	Unit tests	4
1.6	Acknowledgement	4
1.7	Getting Started	4
1.7.1	Example 1: “A and B to delta”	5
1.7.2	Example 2: “B and delta to C”	6
1.7.3	Example 3: “ECEF-vector to geodetic latitude”	7
1.7.4	Example 4: “Geodetic latitude to ECEF-vector”	7
1.7.5	Example 5: “Surface distance”	8
1.7.6	Example 6 “Interpolated position”	9
1.7.7	Example 7: “Mean position”	9
1.7.8	Example 8: “A and azimuth/distance to B”	10
1.7.9	Example 9: “Intersection of two paths”	10
1.7.10	Example 10: “Cross track distance”	11
1.8	See also	12
1.9	Functional examples	12
1.9.1	Example 1: “A and B to delta”	12
1.9.2	Example 2: “B and delta to C”	13
1.9.3	Example 3: “ECEF-vector to geodetic latitude”	14
1.9.4	Example 4: “Geodetic latitude to ECEF-vector”	15
1.9.5	Example 5: “Surface distance”	15
1.9.6	Example 6 “Interpolated position”	16
1.9.7	Example 7: “Mean position”	17
1.9.8	Example 8: “A and azimuth/distance to B”	18
1.9.9	Example 9: “Intersection of two paths”	18
1.9.10	Example 10: “Cross track distance”	19
1.10	License	20
1.11	Developers	21
1.12	Changelog	21
1.12.1	Version 0.7.3, June 4, 2019	21
1.12.2	Version 0.7.0, June 2, 2019	21
1.12.3	Version 0.6.0, December 9, 2018	22
1.12.4	Version 0.5.2, March 7, 2017	23
1.12.5	Version 0.5.1, March 5, 2017	23
1.12.6	Version 0.4.1, January 19, 2016	24
1.12.7	Version 0.1.3, January 1, 2016	25

1.12.8	Version 0.1.1, January 1, 2016	25
1.13	Modules	26
1.13.1	nvector package	26
1.13.1.1	Geodesic functions	26
1.13.1.1.1	nvector_core.lat_lon2n_E	26
1.13.1.1.2	nvector_core.n_E2lat_lon	27
1.13.1.1.3	nvector_core.n_EB_E2p_EB_E	27
1.13.1.1.4	nvector_core.p_EB_E2n_EB_E	28
1.13.1.1.5	nvector_core.n_EA_E_and_n_EB_E2p_AB_E	28
1.13.1.1.6	nvector_core.n_EA_E_and_p_AB_E2n_EB_E	29
1.13.1.1.7	nvector_core.n_EA_E_and_n_EB_E2azimuth	29
1.13.1.1.8	nvector_core.n_EA_E_distance_and_azimuth2n_EB_E	30
1.13.1.1.9	nvector_core.great_circle_distance	30
1.13.1.1.10	nvector_core.euclidean_distance	30
1.13.1.1.11	nvector_core.cross_track_distance	31
1.13.1.1.12	nvector_core.closest_point_on_great_circle	31
1.13.1.1.13	nvector_core.intersect	31
1.13.1.1.14	nvector_core.mean_horizontal_position	31
1.13.1.1.15	nvector_core.on_great_circle	32
1.13.1.1.16	nvector_core.on_great_circle_path	32
1.13.1.2	Rotation matrices and angles	32
1.13.1.2.1	nvector_core.E_rotation	33
1.13.1.2.2	nvector_core.n_E2R_EN	33
1.13.1.2.3	nvector_core.n_E_and_wa2R_EL	34
1.13.1.2.4	nvector_core.R_EL2n_E	34
1.13.1.2.5	nvector_core.R_EN2n_E	34
1.13.1.2.6	nvector_core.R2xyz	35
1.13.1.2.7	nvector_core.R2zyx	35
1.13.1.2.8	nvector_core.xyz2R	36
1.13.1.2.9	nvector_core.zyx2R	36
1.13.1.3	Misc functions	37
1.13.1.3.1	nvector_core.nthroot	37
1.13.1.3.2	nvector_core.deg	37
1.13.1.3.3	nvector_core.rad	37
1.13.1.3.4	nvector_core.select_ellipsoid	38
1.13.1.3.5	nvector_core.unit	38
1.13.1.4	OO interface to Geodesic functions	38
1.13.1.4.1	nvector.objects.FrameE	39
1.13.1.4.2	nvector.objects.FrameN	40
1.13.1.4.3	nvector.objects.FrameL	40
1.13.1.4.4	nvector.objects.FrameB	41
1.13.1.4.5	nvector.objects.ECEFvector	42
1.13.1.4.6	nvector.objects.GeoPoint	43
1.13.1.4.7	nvector.objects.Nvector	44
1.13.1.4.8	nvector.objects.GeoPath	44
1.13.1.4.9	nvector.objects.Pvector	45
1.13.1.4.10	nvector.objects.diff_positions	46
2	Indices and tables	47
	Python Module Index	49
	Index	51

pypi package 2.2.2

This is the documentation of **nvector** 0.7 for Python.

Bleeding edge available at: <https://github.com/pbrod/nvector>.

Official releases are available at: <http://pypi.python.org/pypi/nvector>.

Official homepage are available at: <http://www.navlab.net/nvector/>

1.1 Introduction to Nvector

 pypi package 2.2.2

Nvector is a suite of tools written in Python to solve geographical position calculations like:

- Calculate the surface distance between two geographical positions.
- Convert positions given in one reference frame into another reference frame.
- Find the destination point given start point, azimuth/bearing and distance.
- Find the mean position (center/midpoint) of several geographical positions.
- Find the intersection between two paths.
- Find the cross track distance between a path and a position.

1.2 Description

In this library, we represent position with an “n-vector”, which is the normal vector to the Earth model (the same reference ellipsoid that is used for latitude and longitude). When using n-vector, all Earth-positions are treated equally, and there is no need to worry about singularities or discontinuities. An additional benefit with using n-vector is that many position calculations can be solved with simple vector algebra (e.g. dot product and cross product).

Converting between n-vector and latitude/longitude is unambiguous and easy using the provided functions.

`n_E` is n-vector in the program code, while in documents we use `nE`. `E` denotes an Earth-fixed coordinate frame, and it indicates that the three components of n-vector are along the three axes of `E`. More details about the notation and reference frames can be found [here](#):

1.3 Documentation and code

Official documentation:

<http://www.navlab.net/nvector/>

<http://nvector.readthedocs.io/en/latest/>

Kenneth Gade (2010): A Nonsingular Horizontal Position Representation, The Journal of Navigation, Volume 63, Issue 03, pp 395-417, July 2010.

Bleeding edge: <https://github.com/pbrod/nvector>.

Official releases available at: <http://pypi.python.org/pypi/nvector>.

1.4 Installation

If you have pip installed and are online, then simply type:

```
$ pip install nvector
```

to get the latest stable version. Using pip also has the advantage that all requirements are automatically installed.

You can download nvector and all dependencies to a folder “pkg”, by the following:

```
$ pip install --download=pkg nvector
```

To install the downloaded nvector, just type:

```
$ pip install --no-index --find-links=pkg nvector
```

1.5 Unit tests

To test if the toolbox is working paste the following in an interactive python session:

```
import nvector as nv
nv.test('--doctest-modules')
```

or

```
$ py.test --pyargs nvector --doctest-modules
```

at the command prompt.

1.6 Acknowledgement

The nvector package for Python was written by Per A. Brodtkorb at FFI (The Norwegian Defence Research Establishment) based on the nvector toolbox for Matlab written by the navigation group at FFI.

Most of the content is based on the following article:

Kenneth Gade (2010): A Nonsingular Horizontal Position Representation, The Journal of Navigation, Volume 63, Issue 03, pp 395-417, July 2010.

Thus this article should be cited in publications using this page or the downloaded program code.

1.7 Getting Started

Below the object-oriented solution to some common geodesic problems are given. In the first example the functional solution is also given. The functional solutions to the remaining problems can be found in `test_nvector.py` or the `getting_started_functional.html`.

1.7.1 Example 1: “A and B to delta”



Given two positions, A and B as latitudes, longitudes and depths relative to Earth, E.

Find the exact vector between the two positions, given in meters north, east, and down, and find the direction (azimuth) to B, relative to north. Assume WGS-84 ellipsoid. The given depths are from the ellipsoid surface. Use position A to define north, east, and down directions. (Due to the curvature of Earth and different directions to the North Pole, the north, east, and down directions will change (relative to Earth) for different places. A must be outside the poles for the north and east directions to be defined.)

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> wgs84 = nv.FrameE(name='WGS84')
>>> pointA = wgs84.GeoPoint(latitude=1, longitude=2, z=3, degrees=True)
>>> pointB = wgs84.GeoPoint(latitude=4, longitude=5, z=6, degrees=True)
```

Step1: Find p_AB_N (delta decomposed in N).

```
>>> p_AB_N = pointA.delta_to(pointB)
>>> x, y, z = p_AB_N.pvector.ravel()
>>> valtxt = '{0:8.2f}, {1:8.2f}, {2:8.2f}'.format(x, y, z)
>>> 'Ex1: delta north, east, down = {}'.format(valtxt)
'Ex1: delta north, east, down = 331730.23, 332997.87, 17404.27'
```

Step2: Also find the direction (azimuth) to B, relative to north:

```
>>> azimuth = p_AB_N.azimuth_deg[0]
>>> 'azimuth = {0:4.2f} deg'.format(azimuth)
'azimuth = 45.11 deg'
```

Functional Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import rad, deg
```

```
>>> lat_EA, lon_EA, z_EA = rad(1), rad(2), 3
>>> lat_EB, lon_EB, z_EB = rad(4), rad(5), 6
```

Step1: Convert to n-vectors:

```
>>> n_EA_E = nv.lat_lon2n_E(lat_EA, lon_EA)
>>> n_EB_E = nv.lat_lon2n_E(lat_EB, lon_EB)
```

Step2: Find p_AB_E (delta decomposed in E).WGS-84 ellipsoid is default:

```
>>> p_AB_E = nv.n_EA_E_and_n_EB_E2p_AB_E(n_EA_E, n_EB_E, z_EA, z_EB)
```

Step3: Find R_EN for position A:

```
>>> R_EN = nv.n_E2R_EN(n_EA_E)
```

Step4: Find p_AB_N (delta decomposed in N).

```
>>> p_AB_N = np.dot(R_EN.T, p_AB_E).ravel()
>>> valtxt = '{0:8.2f}, {1:8.2f}, {2:8.2f}'.format(*p_AB_N)
>>> 'Ex1: delta north, east, down = {}'.format(valtxt)
'Ex1: delta north, east, down = 331730.23, 332997.87, 17404.27'
```

Step5: Also find the direction (azimuth) to B, relative to north:

```
>>> azimuth = np.arctan2(p_AB_N[1], p_AB_N[0])
>>> 'azimuth = {0:4.2f} deg'.format(deg(azimuth))
'azimuth = 45.11 deg'
```

See also [Example 1 at www.navlab.net](http://www.navlab.net)

1.7.2 Example 2: “B and delta to C”



A radar or sonar attached to a vehicle B (Body coordinate frame) measures the distance and direction to an object C. We assume that the distance and two angles (typically bearing and elevation relative to B) are already combined to the vector p_{BC_B} (i.e. the vector from B to C, decomposed in B). The position of B is given as n_{EB_E} and z_{EB} , and the orientation (attitude) of B is given as R_{NB} (this rotation matrix can be found from roll/pitch/yaw by using `zyx2R`).

Find the exact position of object C as n-vector and depth (n_{EC_E} and z_{EC}), assuming Earth ellipsoid with semi-major axis a and flattening f . For WGS-72, use $a = 6\,378\,135$ m and $f = 1/298.26$.

Solution:

```
>>> import nvector as nv
>>> import numpy as np
>>> wgs72 = nv.FrameE(name='WGS72')
>>> wgs72 = nv.FrameE(a=6378135, f=1.0/298.26)
```

Step 1: Position and orientation of B is given 400m above E:

```
>>> n_EB_E = wgs72.Nvector(nv.unit([[1], [2], [3]]), z=-400)
>>> frame_B = nv.FrameB(n_EB_E, yaw=10, pitch=20, roll=30, degrees=True)
```

Step 2: Delta BC decomposed in B

```
>>> p_BC_B = frame_B.Pvector(np.r_[3000, 2000, 100].reshape((-1, 1)))
```

Step 3: Decompose delta BC in E

```
>>> p_BC_E = p_BC_B.to_ecef_vector()
```


Step 4: Find point C by adding delta BC to EB

```
>>> p_EB_E = n_EB_E.to_ecef_vector()
>>> p_EC_E = p_EB_E + p_BC_E
>>> pointC = p_EC_E.to_geo_point()
```

```
>>> lat, lon, z = pointC.latlon_deg
>>> msg = 'Ex2: PosC: lat, lon = {:4.2f}, {:4.2f} deg, height = {:4.2f} m'
>>> msg.format(lat[0], lon[0], -z[0])
'Ex2: PosC: lat, lon = 53.33, 63.47 deg, height = 406.01 m'
```

See also [Example 2](#) at www.navlab.net

1.7.3 Example 3: “ECEF-vector to geodetic latitude”

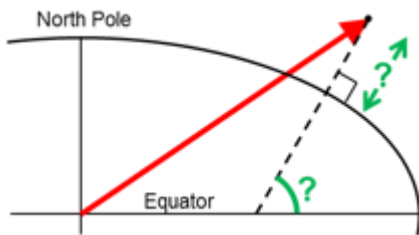

Position B is given as an “ECEF-vector” p_{EB_E} (i.e. a vector from E, the center of the Earth, to B, decomposed in E). Find the geodetic latitude, longitude and height (lat_{EB} , lon_{EB} and h_{EB}), assuming WGS-84 ellipsoid.


Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> wgs84 = nv.FrameE(name='WGS84')
>>> position_B = 6371e3 * np.vstack((0.9, -1, 1.1)) # m
>>> p_EB_E = wgs84.ECEFvector(position_B)
>>> pointB = p_EB_E.to_geo_point()
```

```
>>> lat, lon, z = pointB.latlon_deg
>>> msg = 'Ex3: Pos B: lat, lon = {:4.2f}, {:4.2f} deg, height = {:9.2f} m'
>>> msg.format(lat[0], lon[0], -z[0])
'Ex3: Pos B: lat, lon = 39.38, -48.01 deg, height = 4702059.83 m'
```

See also [Example 3](#) at www.navlab.net

1.7.4 Example 4: “Geodetic latitude to ECEF-vector”

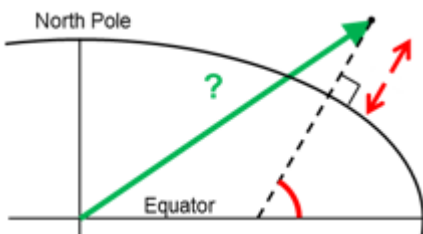

Geodetic latitude, longitude and height are given for position B as lat_{EB} , lon_{EB} and h_{EB} , find the ECEF-vector for this position, p_{EB_E} .


Solution:

```
>>> import nvvector as nv
>>> wgs84 = nv.FrameE(name='WGS84')
>>> pointB = wgs84.GeoPoint(latitude=1, longitude=2, z=-3, degrees=True)
>>> p_EB_E = pointB.to_ecef_vector()
```

```
>>> 'Ex4: p_EB_E = {} m'.format(p_EB_E.pvector.ravel().tolist())
'Ex4: p_EB_E = [6373290.277218279, 222560.20067473652, 110568.82718178593] m'
```

See also [Example 4 at www.navlab.net](http://www.navlab.net)

1.7.5 Example 5: “Surface distance”



Find the surface distance s_{AB} (i.e. great circle distance) between two positions A and B. The heights of A and B are ignored, i.e. if they don't have zero height, we seek the distance between the points that are at the surface of the Earth, directly above/below A and B. The Euclidean distance (chord length) d_{AB} should also be found. Use Earth radius 6371e3 m. Compare the results with exact calculations for the WGS-84 ellipsoid.

Solution for a sphere:

```
>>> import numpy as np
>>> import nvvector as nv
>>> frame_E = nv.FrameE(a=6371e3, f=0)
>>> positionA = frame_E.GeoPoint(latitude=88, longitude=0, degrees=True)
>>> positionB = frame_E.GeoPoint(latitude=89, longitude=-170, degrees=True)
```

```
>>> s_AB, _azia, _azib = positionA.distance_and_azimuth(positionB)
>>> p_AB_E = positionB.to_ecef_vector() - positionA.to_ecef_vector()
>>> d_AB = p_AB_E.length[0]
```

```
>>> msg = 'Ex5: Great circle and Euclidean distance = {}'
>>> msg = msg.format('{:5.2f} km, {:5.2f} km')
>>> msg.format(s_AB / 1000, d_AB / 1000)
'Ex5: Great circle and Euclidean distance = 332.46 km, 332.42 km'
```

Alternative sphere solution:

```
>>> path = nv.GeoPath(positionA, positionB)
>>> s_AB2 = path.track_distance(method='greatcircle').ravel()
>>> d_AB2 = path.track_distance(method='euclidean').ravel()
>>> msg.format(s_AB2[0] / 1000, d_AB2[0] / 1000)
'Ex5: Great circle and Euclidean distance = 332.46 km, 332.42 km'
```


Exact solution for the WGS84 ellipsoid:

```
>>> wgs84 = nv.FrameE(name='WGS84')
>>> point1 = wgs84.GeoPoint(latitude=88, longitude=0, degrees=True)
>>> point2 = wgs84.GeoPoint(latitude=89, longitude=-170, degrees=True)
>>> s_12, _azi1, _azi2 = point1.distance_and_azimuth(point2)
```

```
>>> p_12_E = point2.to_ecef_vector() - point1.to_ecef_vector()
>>> d_12 = p_12_E.length[0]
>>> msg = 'Ellipsoidal and Euclidean distance = {:.2f} km, {:.2f} km'
>>> msg.format(s_12 / 1000, d_12 / 1000)
'Ellipsoidal and Euclidean distance = 333.95 km, 333.91 km'
```

See also [Example 5](#) at www.navlab.net

1.7.6 Example 6 “Interpolated position”



Given the position of B at time t_0 and t_1 , $n_{EB_E}(t_0)$ and $n_{EB_E}(t_1)$.

Find an interpolated position at time t_i , $n_{EB_E}(t_i)$. All positions are given as n-vectors.

Solution:

```
>>> import nvector as nv
>>> wgs84 = nv.FrameE(name='WGS84')
>>> n_EB_E_t0 = wgs84.GeoPoint(89, 0, degrees=True).to_nvector()
>>> n_EB_E_t1 = wgs84.GeoPoint(89, 180, degrees=True).to_nvector()
>>> path = nv.GeoPath(n_EB_E_t0, n_EB_E_t1)
```

```
>>> t0 = 10.
>>> t1 = 20.
>>> ti = 16. # time of interpolation
>>> ti_n = (ti - t0) / (t1 - t0) # normalized time of interpolation
```

```
>>> g_EB_E_ti = path.interpolate(ti_n).to_geo_point()
```

```
>>> lat_ti, lon_ti, z_ti = g_EB_E_ti.latlon_deg
>>> msg = 'Ex6, Interpolated position: lat, lon = {:.1f} deg, {:.1f} deg'
>>> msg.format(lat_ti[0], lon_ti[0])
'Ex6, Interpolated position: lat, lon = 89.8 deg, 180.0 deg'
```

See also [Example 6](#) at www.navlab.net

1.7.7 Example 7: “Mean position”




Three positions A, B, and C are given as n-vectors n_{EA_E} , n_{EB_E} , and n_{EC_E} . Find the mean position, M, given as n_{EM_E} . Note that the calculation is independent of the depths of the positions.

Solution:

```
>>> import nvector as nv
>>> points = nv.GeoPoint(latitude=[90, 60, 50],
...                       longitude=[0, 10, -20], degrees=True)
>>> nvectors = points.to_nvector()
>>> n_EM_E = nvectors.mean()
>>> g_EM_E = n_EM_E.to_geo_point()
>>> lat, lon = g_EM_E.latitude_deg, g_EM_E.longitude_deg
>>> msg = 'Ex7: Pos M: lat, lon = {:.2f}, {:.2f} deg'
>>> msg.format(lat[0], lon[0])
'Ex7: Pos M: lat, lon = 67.24, -6.92 deg'
```

See also [Example 7 at www.navlab.net](http://www.navlab.net)

1.7.8 Example 8: “A and azimuth/distance to B”



We have an initial position A, direction of travel given as an azimuth (bearing) relative to north (clockwise), and finally the distance to travel along a great circle given as s_{AB} . Use Earth radius $6371e3$ m to find the destination point B.

In geodesy this is known as “The first geodetic problem” or “The direct geodetic problem” for a sphere, and we see that this is similar to [Example 2](#), but now the delta is given as an azimuth and a great circle distance. (“The second/inverse geodetic problem” for a sphere is already solved in [Examples 1 and 5](#).)


Solution:

```
>>> import nvector as nv
>>> frame = nv.FrameE(a=6371e3, f=0)
>>> pointA = frame.GeoPoint(latitude=80, longitude=-90, degrees=True)
>>> pointB, _azimuthb = pointA.displace(distance=1000, azimuth=200,
...                                   degrees=True)
>>> lat, lon = pointB.latitude_deg, pointB.longitude_deg
```

```
>>> msg = 'Ex8, Destination: lat, lon = {:.2f} deg, {:.2f} deg'
>>> msg.format(lat, lon)
'Ex8, Destination: lat, lon = 79.99 deg, -90.02 deg'
```

See also [Example 8 at www.navlab.net](http://www.navlab.net)

1.7.9 Example 9: “Intersection of two paths”



Define a path from two given positions (at the surface of a spherical Earth), as the great circle that goes through the two points.

Path A is given by A1 and A2, while path B is given by B1 and B2.

Find the position C where the two great circles intersect.


Solution:

```
>>> import nvector as nv
>>> pointA1 = nv.GeoPoint(10, 20, degrees=True)
>>> pointA2 = nv.GeoPoint(30, 40, degrees=True)
>>> pointB1 = nv.GeoPoint(50, 60, degrees=True)
>>> pointB2 = nv.GeoPoint(70, 80, degrees=True)
>>> pathA = nv.GeoPath(pointA1, pointA2)
>>> pathB = nv.GeoPath(pointB1, pointB2)

>>> pointC = pathA.intersect(pathB)
>>> np.allclose(pathA.on_path(pointC), pathB.on_path(pointC))
True
>>> np.allclose(pathA.on_great_circle(pointC),
...             pathB.on_great_circle(pointC))
True
>>> pointC = pointC.to_geo_point()
>>> lat, lon = pointC.latitude_deg, pointC.longitude_deg
>>> msg = 'Ex9, Intersection: lat, lon = {:.2f}, {:.2f} deg'
>>> msg.format(lat[0], lon[0])
'Ex9, Intersection: lat, lon = 40.32, 55.90 deg'
```

See also [Example 9 at www.navlab.net](http://www.navlab.net)

1.7.10 Example 10: “Cross track distance”



Path A is given by the two positions A1 and A2 (similar to the previous example).

Find the cross track distance sxt between the path A (i.e. the great circle through A1 and A2) and the position B (i.e. the shortest distance at the surface, between the great circle and B).

Also find the Euclidean distance dxt between B and the plane defined by the great circle. Use Earth radius 6371e3.

Finally, find the intersection point on the great circle and determine if it is between position A1 and A2.

Solution:

```
>>> import nvector as nv
>>> frame = nv.FrameE(a=6371e3, f=0)
>>> pointA1 = frame.GeoPoint(0, 0, degrees=True)
>>> pointA2 = frame.GeoPoint(10, 0, degrees=True)
>>> pointB = frame.GeoPoint(1, 0.1, degrees=True)
>>> pathA = nv.GeoPath(pointA1, pointA2)

>>> s_xt = pathA.cross_track_distance(pointB, method='greatcircle').ravel()
>>> d_xt = pathA.cross_track_distance(pointB, method='euclidean').ravel()
```

```
>>> val_txt = '{:4.2f} km, {:4.2f} km'.format(s_xt[0]/1000, d_xt[0]/1000)
>>> 'Ex10: Cross track distance: s_xt, d_xt = {}'.format(val_txt)
'Ex10: Cross track distance: s_xt, d_xt = 11.12 km, 11.12 km'
```

```
>>> pointC = pathA.closest_point_on_great_circle(pointB)
>>> np.allclose(pathA.on_path(pointC), True)
True
```

See also [Example 10](#) at www.navlab.net

1.8 See also

[geographiclib](#)

1.9 Functional examples

Below the functional solution to some common geodesic problems are given. In the first example the object-oriented solution is also given. The object-oriented solutions to the remaining problems can be found in [test_frames.py](#) or the [overview.html#getting-started](#).

1.9.1 Example 1: “A and B to delta”



Given two positions, A and B as latitudes, longitudes and depths relative to Earth, E.

Find the exact vector between the two positions, given in meters north, east, and down, and find the direction (azimuth) to B, relative to north. Assume WGS-84 ellipsoid. The given depths are from the ellipsoid surface. Use position A to define north, east, and down directions. (Due to the curvature of Earth and different directions to the North Pole, the north, east, and down directions will change (relative to Earth) for different places. A must be outside the poles for the north and east directions to be defined.)

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import rad, deg
```

```
>>> lat_EA, lon_EA, z_EA = rad(1), rad(2), 3
>>> lat_EB, lon_EB, z_EB = rad(4), rad(5), 6
```

Step1: Convert to n-vectors:

```
>>> n_EA_E = nv.lat_lon2n_E(lat_EA, lon_EA)
>>> n_EB_E = nv.lat_lon2n_E(lat_EB, lon_EB)
```

Step2: Find p_AB_E (delta decomposed in E).WGS-84 ellipsoid is default:


```
>>> p_AB_E = nv.n_EA_E_and_n_EB_E2p_AB_E(n_EA_E, n_EB_E, z_EA, z_EB)
```

Step3: Find R_EN for position A:

```
>>> R_EN = nv.n_E2R_EN(n_EA_E)
```

Step4: Find p_AB_N (delta decomposed in N).

```
>>> p_AB_N = np.dot(R_EN.T, p_AB_E).ravel()
>>> valtxt = '{0:8.2f}, {1:8.2f}, {2:8.2f}'.format(*p_AB_N)
>>> 'Ex1: delta north, east, down = {}'.format(valtxt)
'Ex1: delta north, east, down = 331730.23, 332997.87, 17404.27'
```

Step5: Also find the direction (azimuth) to B, relative to north:

```
>>> azimuth = np.arctan2(p_AB_N[1], p_AB_N[0])
>>> 'azimuth = {0:4.2f} deg'.format(deg(azimuth))
'azimuth = 45.11 deg'
```

OO-Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> wgs84 = nv.FrameE(name='WGS84')
>>> pointA = wgs84.GeoPoint(latitude=1, longitude=2, z=3, degrees=True)
>>> pointB = wgs84.GeoPoint(latitude=4, longitude=5, z=6, degrees=True)
```

Step1: Find p_AB_N (delta decomposed in N).

```
>>> p_AB_N = pointA.delta_to(pointB)
>>> x, y, z = p_AB_N.pvector.ravel()
>>> valtxt = '{0:8.2f}, {1:8.2f}, {2:8.2f}'.format(x, y, z)
>>> 'Ex1: delta north, east, down = {}'.format(valtxt)
'Ex1: delta north, east, down = 331730.23, 332997.87, 17404.27'
```

Step2: Also find the direction (azimuth) to B, relative to north:

```
>>> azimuth = p_AB_N.azimuth_deg[0]
>>> 'azimuth = {0:4.2f} deg'.format(azimuth)
'azimuth = 45.11 deg'
```

See also [Example 1 at www.navlab.net](http://www.navlab.net)

1.9.2 Example 2: “B and delta to C”



A radar or sonar attached to a vehicle B (Body coordinate frame) measures the distance and direction to an object C. We assume that the distance and two angles (typically bearing and elevation relative to B) are already combined to the vector p_{BC_B} (i.e. the vector from B to C, decomposed in B). The position of B is given as n_{EB_E} and z_{EB} , and the orientation (attitude) of B is given as R_{NB} (this rotation matrix can be found from roll/pitch/yaw by using $zyx2R$).

Find the exact position of object C as n-vector and depth (n_{EC_E} and z_{EC}), assuming Earth ellipsoid with semi-major axis a and flattening f . For WGS-72, use $a = 6\,378\,135$ m and $f = 1/298.26$.

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import rad, deg
```

A custom reference ellipsoid is given (replacing WGS-84):

```
>>> wgs72 = dict(a=6378135, f=1.0/298.26)
```

Step 1 Position and orientation of B is 400m above E:

```
>>> n_EB_E = nv.unit([[1], [2], [3]]) # unit to get unit length of vector
>>> z_EB = -400
>>> yaw, pitch, roll = rad(10), rad(20), rad(30)
>>> R_NB = nv.zyx2R(yaw, pitch, roll)
```

Step 2: Delta BC decomposed in B

```
>>> p_BC_B = np.r_[3000, 2000, 100].reshape((-1, 1))
```

Step 3: Find R_{EN} :

```
>>> R_EN = nv.n_E2R_EN(n_EB_E)
```

Step 4: Find R_{EB} , from R_{EN} and R_{NB} :

```
>>> R_EB = np.dot(R_EN, R_NB) # Note: closest frames cancel
```

Step 5: Decompose the delta BC vector in E:

```
>>> p_BC_E = np.dot(R_EB, p_BC_B)
```


Step 6: Find the position of C, using the functions that goes from one

```
>>> n_EC_E, z_EC = nv.n_EA_E_and_p_AB_E2n_EB_E(n_EB_E, p_BC_E, z_EB, **wgs72)
```

```
>>> lat_EC, lon_EC = nv.n_E2lat_lon(n_EC_E)
>>> lat, lon, z = deg(lat_EC), deg(lon_EC), z_EC
>>> msg = 'Ex2: PosC: lat, lon = {:.42f}, {:.42f} deg, height = {:.42f} m'
>>> msg.format(lat[0], lon[0], -z[0])
'Ex2: PosC: lat, lon = 53.33, 63.47 deg, height = 406.01 m'
```

See also [Example 2 at www.navlab.net](http://www.navlab.net)

1.9.3 Example 3: “ECEF-vector to geodetic latitude”

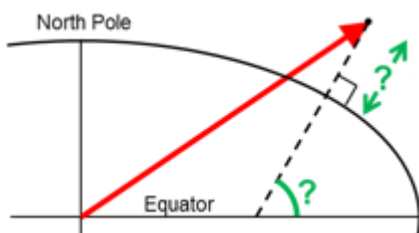

Position B is given as an “ECEF-vector” p_{EB_E} (i.e. a vector from E, the center of the Earth, to B, decomposed in E). Find the geodetic latitude, longitude and height (lat_{EB} , lon_{EB} and h_{EB}), assuming WGS-84 ellipsoid.

Solution:


```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import deg
>>> wgs84 = dict(a=6378137.0, f=1.0/298.257223563)
>>> p_EB_E = 6371e3 * np.vstack((0.9, -1, 1.1)) # m
```

```
>>> n_EB_E, z_EB = nv.p_EB_E2n_EB_E(p_EB_E, **wgs84)
```

```
>>> lat_EB, lon_EB = nv.n_E2lat_lon(n_EB_E)
>>> h = -z_EB
>>> lat, lon = deg(lat_EB), deg(lon_EB)
```

```
>>> msg = 'Ex3: Pos B: lat, lon = {:4.2f}, {:4.2f} deg, height = {:9.2f} m'
>>> msg.format(lat[0], lon[0], h[0])
'Ex3: Pos B: lat, lon = 39.38, -48.01 deg, height = 4702059.83 m'
```

See also [Example 3 at www.navlab.net](http://www.navlab.net)

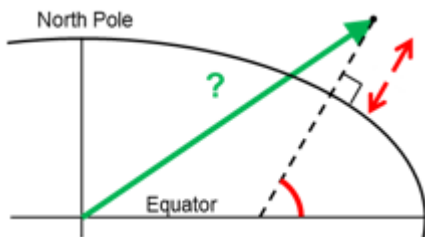1.9.4 Example 4: “Geodetic latitude to ECEF-vector”


Geodetic latitude, longitude and height are given for position B as `latEB`, `lonEB` and `hEB`, find the ECEF-vector for this position, `p_EB_E`.

Solution:

```
>>> import nvector as nv
>>> from nvector import rad
>>> wgs84 = dict(a=6378137.0, f=1.0/298.257223563)
>>> lat_EB, lon_EB = rad(1), rad(2)
>>> h_EB = 3
>>> n_EB_E = nv.lat_lon2n_E(lat_EB, lon_EB)
>>> p_EB_E = nv.n_EB_E2p_EB_E(n_EB_E, -h_EB, **wgs84)
```

```
>>> 'Ex4: p_EB_E = {} m'.format(p_EB_E.ravel().tolist())
'Ex4: p_EB_E = [6373290.277218279, 222560.20067473652, 110568.82718178593] m'
```

See also [Example 4 at www.navlab.net](http://www.navlab.net)

1.9.5 Example 5: “Surface distance”

Find the surface distance s_{AB} (i.e. great circle distance) between two positions A and B. The heights of A and B are ignored, i.e. if they don't have zero height, we seek the distance between the points that are at the surface of the Earth, directly above/below A and B. The Euclidean distance (chord length) d_{AB} should also be found. Use Earth radius 6371e3 m. Compare the results with exact calculations for the WGS-84 ellipsoid.

Solution for a sphere:

```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import rad

>>> n_EA_E = nv.lat_lon2n_E(rad(88), rad(0))
>>> n_EB_E = nv.lat_lon2n_E(rad(89), rad(-170))

>>> r_Earth = 6371e3 # m, mean Earth radius
>>> s_AB = nv.great_circle_distance(n_EA_E, n_EB_E, radius=r_Earth)[0]
>>> d_AB = nv.euclidean_distance(n_EA_E, n_EB_E, radius=r_Earth)[0]

>>> msg = 'Ex5: Great circle and Euclidean distance = {}'
>>> msg = msg.format('{:5.2f} km, {:5.2f} km')
>>> msg.format(s_AB / 1000, d_AB / 1000)
'Ex5: Great circle and Euclidean distance = 332.46 km, 332.42 km'
```


Exact solution for the WGS84 ellipsoid:

```
>>> wgs84 = nv.FrameE(name='WGS84')
>>> point1 = wgs84.GeoPoint(latitude=88, longitude=0, degrees=True)
>>> point2 = wgs84.GeoPoint(latitude=89, longitude=-170, degrees=True)
>>> s_12, _azi1, _azi2 = point1.distance_and_azimuth(point2)

>>> p_12_E = point2.to_ecef_vector() - point1.to_ecef_vector()
>>> d_12 = p_12_E.length[0]
>>> msg = 'Ellipsoidal and Euclidean distance = {:5.2f} km, {:5.2f} km'
>>> msg.format(s_12 / 1000, d_12 / 1000)
'Ellipsoidal and Euclidean distance = 333.95 km, 333.91 km'
```

See also [Example 5 at www.navlab.net](http://www.navlab.net)

1.9.6 Example 6 “Interpolated position”



Given the position of B at time t_0 and t_1 , $n_{EB_E}(t_0)$ and $n_{EB_E}(t_1)$.

Find an interpolated position at time t_i , $n_{EB_E}(t_i)$. All positions are given as n-vectors.

Solution:

```
>>> import nvector as nv
>>> from nvector import rad, deg
>>> n_EB_E_t0 = nv.lat_lon2n_E(rad(89), rad(0))
>>> n_EB_E_t1 = nv.lat_lon2n_E(rad(89), rad(180))
```

```
>>> t0 = 10.
>>> t1 = 20.
>>> ti = 16. # time of interpolation
>>> ti_n = (ti - t0) / (t1 - t0) # normalized time of interpolation
```

```
>>> n_EB_E_ti = nv.unit(n_EB_E_t0 + ti_n * (n_EB_E_t1 - n_EB_E_t0))
>>> lat_EB_ti, lon_EB_ti = nv.n_E2lat_lon(n_EB_E_ti)
```

```
>>> lat_ti, lon_ti = deg(lat_EB_ti), deg(lon_EB_ti)
>>> msg = 'Ex6, Interpolated position: lat, lon = {:.2f} deg, {:.2f} deg'
>>> msg.format(lat_ti[0], lon_ti[0])
'Ex6, Interpolated position: lat, lon = 89.8 deg, 180.0 deg'
```

See also [Example 6 at www.navlab.net](http://www.navlab.net)

1.9.7 Example 7: “Mean position”



Three positions A, B, and C are given as n-vectors n_{EA_E} , n_{EB_E} , and n_{EC_E} . Find the mean position, M, given as n_{EM_E} . Note that the calculation is independent of the depths of the positions.

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import rad, deg
```

```
>>> n_EA_E = nv.lat_lon2n_E(rad(90), rad(0))
>>> n_EB_E = nv.lat_lon2n_E(rad(60), rad(10))
>>> n_EC_E = nv.lat_lon2n_E(rad(50), rad(-20))
```

```
>>> n_EM_E = nv.unit(n_EA_E + n_EB_E + n_EC_E)
```


or

```
>>> n_EM_E = nv.mean_horizontal_position(np.hstack((n_EA_E, n_EB_E, n_EC_E)))
```

```
>>> lat, lon = nv.n_E2lat_lon(n_EM_E)
>>> lat, lon = deg(lat), deg(lon)
>>> msg = 'Ex7: Pos M: lat, lon = {:.2f}, {:.2f} deg'
>>> msg.format(lat[0], lon[0])
'Ex7: Pos M: lat, lon = 67.24, -6.92 deg'
```

See also [Example 7 at www.navlab.net](http://www.navlab.net)

1.9.8 Example 8: “A and azimuth/distance to B”



We have an initial position A, direction of travel given as an azimuth (bearing) relative to north (clockwise), and finally the distance to travel along a great circle given as s_{AB} . Use Earth radius $6371e3$ m to find the destination point B.

In geodesy this is known as “The first geodetic problem” or “The direct geodetic problem” for a sphere, and we see that this is similar to [Example 2](#), but now the delta is given as an azimuth and a great circle distance. (“The second/inverse geodetic problem” for a sphere is already solved in [Examples 1](#) and [5](#).)

Solution:


```
>>> import nvector as nv
>>> from nvector import rad, deg
>>> lat, lon = rad(80), rad(-90)

>>> n_EA_E = nv.lat_lon2n_E(lat, lon)
>>> azimuth = rad(200)
>>> s_AB = 1000.0 # [m]
>>> r_earth = 6371e3 # [m], mean earth radius

>>> distance_rad = s_AB / r_earth
>>> n_EB_E = nv.n_EA_E_distance_and_azimuth2n_EB_E(n_EA_E, distance_rad,
...                                                azimuth)
>>> lat_EB, lon_EB = nv.n_E2lat_lon(n_EB_E)
>>> lat, lon = deg(lat_EB), deg(lon_EB)
>>> msg = 'Ex8, Destination: lat, lon = {:.42f} deg, {:.42f} deg'
>>> msg.format(lat[0], lon[0])
'Ex8, Destination: lat, lon = 79.99 deg, -90.02 deg'
```

See also [Example 8 at www.navlab.net](http://www.navlab.net)

1.9.9 Example 9: “Intersection of two paths”



Define a path from two given positions (at the surface of a spherical Earth), as the great circle that goes through the two points.

Path A is given by A1 and A2, while path B is given by B1 and B2.

Find the position C where the two great circles intersect.

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> from nvector import rad, deg
```

```
>>> n_EA1_E = nv.lat_lon2n_E(rad(10), rad(20))
>>> n_EA2_E = nv.lat_lon2n_E(rad(30), rad(40))
>>> n_EB1_E = nv.lat_lon2n_E(rad(50), rad(60))
>>> n_EB2_E = nv.lat_lon2n_E(rad(70), rad(80))
```

```
>>> n_EC_E = nv.unit(np.cross(np.cross(n_EA1_E, n_EA2_E, axis=0),
...                             np.cross(n_EB1_E, n_EB2_E, axis=0),
...                             axis=0))
>>> n_EC_E *= np.sign(np.dot(n_EC_E.T, n_EA1_E))
```

or alternatively

```
>>> path_a, path_b = (n_EA1_E, n_EA2_E), (n_EB1_E, n_EB2_E)
>>> n_EC_E = nv.intersect(path_a, path_b)
```


```
>>> lat_EC, lon_EC = nv.n_E2lat_lon(n_EC_E)
```

```
>>> lat, lon = deg(lat_EC), deg(lon_EC)
>>> msg = 'Ex9, Intersection: lat, lon = {:4.2f}, {:4.2f} deg'
>>> msg.format(lat[0], lon[0])
'Ex9, Intersection: lat, lon = 40.32, 55.90 deg'
```

```
>>> np.allclose(nv.on_great_circle_path(path_a, n_EC_E),
...             nv.on_great_circle_path(path_b, n_EC_E))
True
>>> np.allclose(nv.on_great_circle(path_a, n_EC_E), nv.on_great_circle(path_b,
↪n_EC_E))
True
```

See also [Example 9 at www.navlab.net](http://www.navlab.net)

1.9.10 Example 10: “Cross track distance”



Path A is given by the two positions A1 and A2 (similar to the previous example).

Find the cross track distance s_{xt} between the path A (i.e. the great circle through A1 and A2) and the position B (i.e. the shortest distance at the surface, between the great circle and B).

Also find the Euclidean distance d_{xt} between B and the plane defined by the great circle. Use Earth radius $6371e3$.

Finally, find the intersection point on the great circle and determine if it is between position A1 and A2.

Solution:

```
>>> import numpy as np
>>> import nvector as nv
>>> n_EA1_E = nv.lat_lon2n_E(rad(0), rad(0))
```

(continues on next page)

(continued from previous page)

```
>>> n_EA2_E = nv.lat_lon2n_E(rad(10), rad(0))
>>> n_EB_E = nv.lat_lon2n_E(rad(1), rad(0.1))
>>> path = (n_EA1_E, n_EA2_E)
>>> radius = 6371e3 # mean earth radius [m]
>>> s_xt = nv.cross_track_distance(path, n_EB_E, radius=radius)
>>> d_xt = nv.cross_track_distance(path, n_EB_E, method='euclidean',
...                               radius=radius)

>>> val_txt = '{:4.2f} km, {:4.2f} km'.format(s_xt[0]/1000, d_xt[0]/1000)
>>> 'Ex10: Cross track distance: s_xt, d_xt = {0}'.format(val_txt)
'Ex10: Cross track distance: s_xt, d_xt = 11.12 km, 11.12 km'

>>> n_EC_E = nv.closest_point_on_great_circle(path, n_EB_E)
>>> np.allclose(nv.on_great_circle_path(path, n_EC_E, radius), True)
True
```

Alternative solution 2:

```
>>> s_xt2 = nv.great_circle_distance(n_EB_E, n_EC_E, radius)
>>> d_xt2 = nv.euclidean_distance(n_EB_E, n_EC_E, radius)
>>> np.allclose(s_xt, s_xt2), np.allclose(d_xt, d_xt2)
(True, True)
```

Alternative solution 3:

```
>>> c_E = nv.great_circle_normal(n_EA1_E, n_EA2_E)
>>> sin_theta = -np.dot(c_E.T, n_EB_E).ravel()
>>> s_xt3 = np.arcsin(sin_theta) * radius
>>> d_xt3 = sin_theta * radius
>>> np.allclose(s_xt, s_xt3), np.allclose(d_xt, d_xt3)
(True, True)
```

See also [Example 10 at www.navlab.net](http://www.navlab.net)

1.10 License

The content of this library is based on the following publication:

Gade, K. (2010). A Nonsingular Horizontal Position Representation, The Journal of Navigation, Volume 63, Issue 03, pp 395-417, July 2010. (www.navlab.net/Publications/A_Nonsingular_Horizontal_Position_Representation.pdf)

This paper should be cited in publications using this library.

Copyright (c) 2015, Norwegian Defence Research Establishment (FFI) All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above publication information, copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above publication information, copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS “AS IS” AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE,

DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.11 Developers

- Kenneth Gade, FFI
- Kristian Svartveit, FFI
- Brita Hafskjold Gade, FFI
- Per A. Brodtkorb FFI

1.12 Changelog

1.12.1 Version 0.7.3, June 4, 2019

Per A Brodtkorb (6):

- Renamed LICENSE.txt and THANKS.txt to LICENSE.rst and THANKS.rst
- Updated README.rst and nvector/_info.py
- Fixed issue 7# incorrect test for test_n_E_and_wa2R_EL.
- Removed coveralls test coverage report.
- Replaced coverage badge from coveralls to codecov.
- Updated code-climate reporter.
- Simplified duplicated code in nvector._core.
- Added tests/__init__.py
- Added “-pyargs nvector” to pytest options in setup.cfg
- Exclude build_package.py from distribution in MANIFEST.in
- Replaced healt_img from landscape to codeclimate.
- Updated travis to explicitly install pytest-cov and pytest-pep8
- Removed dependence on pyscaffold
- Added MANIFEST.in
- Renamed set_package_version.py to build_package.py

1.12.2 Version 0.7.0, June 2, 2019

Gary van der Merwe (1):

- Add interpolate to __all__ so that it can be imported

Per A Brodtkorb (26):

- Updated long_description in setup.cfg
- Replaced deprecated sphinx.ext.pngmath with sphinx.ext.imgmath
- Added imgmath to requirements for building the docs.

- **Fixing shallow clone warning. Replaced property** `'sonar.python.coverage.itReportPath'` with `'sonar.python.coverage.reportPaths'` instead, because it has been removed.
- Drop python 3.4 support
- Added python 3.7 support
- **Fixed a bug: Mixed scalars and `np.array([1])` values don't work with** `np.rad2deg` function.
- **Added ETRS ELLIPSOID in `_core.py` Added ED50 as alias for International** (Hayford)/European Datum in `_core.py` Added sad69 as alias for South American 1969 in `_core.py`
- Simplified docstring for `nv.test`
- Generalized the `setup.py`.
- Replaced aliases with the correct names in `setup.cfg`.

1.12.3 Version 0.6.0, December 9, 2018

Per A Brodtkorb (79):

- Updated requirements in `setup.py`
- Removed `tox.ini`
- Updated documentation on how to set package version
- Made a separate script to set package version in `nvector/__init__.py`
- Updated docstring for `select_ellipsoid`
- Replace `GeoPoint.geo_point` with `GeoPoint.displace` and removed deprecated `GeoPoint.geo_point`
- Update `.travis.yml`
- Fix so that codeclimate is able to parse `.travis.yml`
- Only run sonar and codeclimate reporter for python v3.6
- Added `sonar-project.properties`
- **Pinned coverage to v4.3.4 due to fact that codeclimate reporter is only** compatible with Coverage.py versions `>=4.0,<4.4`.
- Updated with sonar scanner.
- Added `.pylintrc`
- Set up codeclimate reporter
- Updated docstring for `unit` function.
- Avoid division by zero in `unit` function.
- Reenabled the doctest of `plot_mean_position`
- Reset `"pyscaffold==2.5.11"`
- Replaced deprecated basemap with cartopy.
- **Replaced doctest of `plot_mean_position` with `test_plot_mean_position` in** `test_plot.py`
- **Fixed failing doctests for python v3.4 and v3.5 and made them more** robust.
- Fixed failing doctests and made them more robust.
- Increased pycoverage version to use.
- moved `nvector` to `src/nvector/`

- **Reset the setup.py to require 'pyscaffold==2.5.11' which works on** python version 3.4, 3.5 and 3.6. as well as 2.7
- Updated unittests.
- Updated tests.
- Removed obsolete code
- Added test for delta_L
- **Added corner testcase for** pointA.displace(distance=1000,azimuth=np.deg2rad(200))
- Added test for path.track_distance(method='exact')
- **Added delta_L a function that return cartesian delta vector from** positions A to B decomposed in L.
- Simplified OO-solution in example 1 by using delta_N function
- Refactored duplicated code
- **Vectorized code so that the frames can take more than one position at** the time.
- Keeping only the html docs in the distribution.
- **replaced link from latest to stable docs on readthedocs and updated** crosstrack distance test.
- updated documentation in setup.py

1.12.4 Version 0.5.2, March 7, 2017

Per A Brodtkorb (10):

- Fixed tests in tests/test_frames.py
- Updated to setup.cfg and tox.ini + pep8
- updated .travis.yml
- Updated Readme.rst with new example 10 picture and link to nvector docs at readthedocs.
- updated official documentation links
- Updated crosstrack distance tests.

1.12.5 Version 0.5.1, March 5, 2017

Cody (4):

- Explicitly numbered replacement fields
- Migrated % string formatting

Per A Brodtkorb (29):

- pep8
- Updated failing examples
- Updated README.rst
- Removed obsolete pass statement
- Documented functions
- added .checkignore for quantifyscode
- moved test_docstrings and use_docstring_from into _common.py
- Added .codeclimate.yml

- Updated installation information in _info.py
- Added GeoPath.on_path method. Clarified intersection example
- Added great_circle_normal, cross_track_distance Renamed intersection to intersect (Intersection is deprecated.)
- Simplified R2zyx with a call to R2xyz Improved accuracy for great circle cross track distance for small distances.
- Added on_great_circle, _on_great_circle_path, _on_ellipsoid_path, closest_point_on_great_circle and closest_point_on_path to GeoPath
- made __eq__ more robust for frames
- Removed duplicated code
- Updated tests
- Removed fishy test
- replaced zero n-vector with nan
- Commented out failing test.
- Added example 10 image
- Added 'closest_point_on_great_circle', 'on_great_circle', 'on_great_circle_path'.
- Updated examples + documentation
- Updated index depth
- Updated README.rst and classifier in setup.cfg

1.12.6 Version 0.4.1, January 19, 2016

pbrod (46):

- Cosmetic updates
- Updated README.rst
- updated docs and removed unused code
- updated README.rst and .coveragerc
- Refactored out _check_frames
- Refactored out _default_frame
- Updated .coveragerc
- Added link to geographiclib
- Updated external link
- Updated documentation
- Added figures to examples
- Added GeoPath.interpolate + interpolation example 6
- Added links to FFI homepage.
- **Updated documentation:**
 - Added link to nvector toolbox for matlab
 - For each example added links to the more detailed explanation on the homepage
- Updated link to nvector toolbox for matlab
- Added link to nvector on pypi

- Updated documentation fro FrameB, FrameE, FrameL and FrameN.
- updated `__all__` variable
- Added missing `R_Ee` to function `n_EA_E_and_n_EB_E2azimuth` + updated documentation
- Updated `CHANGES.rst`
- Updated `conf.py`
- Renamed `info.py` to `_info.py`
- All examples are now generated from `_examples.py`.

1.12.7 Version 0.1.3, January 1, 2016

pbrod (31):

- Refactored
- Updated tests
- Updated docs
- Moved tests to `nvector/tests`
- Updated `.coverage` Added `travis.yml`, `.landscape.yml`
- Deleted obsolete `LICENSE`
- Updated `README.rst`
- Removed `ngs` version
- Fixed bug in `.travis.yml`
- Updated `.travis.yml`
- Removed dependence on `navigator.py`
- Updated `README.rst`
- Updated examples
- Deleted `skeleton.py` and added `tox.ini`
- Small refactoring Renamed `distance_rad_bearing_rad2point` to `n_EA_E_distance_and_azimuth2n_EB_E` updated tests
- Renamed `azimuth` to `n_EA_E_and_n_EB_E2azimuth` Added tests for `R2xyz` as well as `R2zyx`
- Removed backward compatibility Added `test_n_E_and_wa2R_EL`
- Refactored tests
- Commented out failing tests on python 3+
- updated `CHANGES.rst`
- Removed bug in `setup.py`

1.12.8 Version 0.1.1, January 1, 2016

pbrod (31):

- Initial commit: Translated code from Matlab to Python.
- Added object oriented interface to `nvector` library
- Added tests for object oriented interface
- Added geodesic tests.

1.13 Modules

Release 0.7

Date Jun 04, 2019

This reference manual details functions, modules, and objects included in nvector, describing what they are and what they do.

1.13.1 nvector package

1.13.1.1 Geodesic functions

<code>lat_lon2n_E(latitude, longitude[, R_Ee])</code>	Converts latitude and longitude to n-vector.
<code>n_E2lat_lon(n_E[, R_Ee])</code>	Converts n-vector to latitude and longitude.
<code>n_EB_E2p_EB_E(n_EB_E[, depth, a, f, R_Ee])</code>	Converts n-vector to Cartesian position vector in meters.
<code>p_EB_E2n_EB_E(p_EB_E[, a, f, R_Ee])</code>	Converts Cartesian position vector in meters to n-vector.
<code>n_EA_E_and_n_EB_E2p_AB_E(n_EA_E, n_EB_E[, ...])</code>	Return the delta vector from position A to B.
<code>n_EA_E_and_p_AB_E2n_EB_E(n_EA_E, p_AB_E[, ...])</code>	Return position B from position A and delta.
<code>n_EA_E_and_n_EB_E2azimuth(n_EA_E, n_EB_E[, ...])</code>	Return azimuth from A to B, relative to North:
<code>n_EA_E_distance_and_azimuth2n_EB_E(n_EA_E, distance, azimuth[, ...])</code>	Return position B from azimuth and distance from position A
<code>great_circle_distance(n_EA_E, n_EB_E[, radius])</code>	Return great circle distance between positions A and B
<code>euclidean_distance(n_EA_E, n_EB_E[, radius])</code>	Return Euclidean distance between positions A and B
<code>cross_track_distance(path, n_EB_E[, method, ...])</code>	Return cross track distance between path A and position B.
<code>closest_point_on_great_circle(path, n_EB_E)</code>	Return closest point C on great circle path A to position B.
<code>intersect(path_a, path_b)</code>	Return the intersection(s) between the great circles of the two paths
<code>mean_horizontal_position(n_EB_E)</code>	Return the n-vector of the horizontal mean position.
<code>on_great_circle(path, n_EB_E[, radius, ...])</code>	True if position B is on great circle through path A.
<code>on_great_circle_path(path, n_EB_E[, radius, ...])</code>	True if position B is on great circle and between end-points of path A.

1.13.1.1.1 nvector_core.lat_lon2n_E

lat_lon2n_E (*latitude, longitude, R_Ee=None*)

Converts latitude and longitude to n-vector.

Parameters

latitude, longitude: real scalars or vectors of length **n**. Geodetic latitude and longitude given in [rad]

R_Ee [3 x 3 array] rotation matrix defining the axes of the coordinate frame E.

Returns

n_E: 3 x **n** array n-vector(s) [no unit] decomposed in E.

See also:

[n_E2lat_lon](#)

1.13.1.1.2 nvector_core.n_E2lat_lon

n_E2lat_lon (*n_E*, *R_Ee*=None)

Converts n-vector to latitude and longitude.

Parameters

n_E: 3 x n array n-vector [no unit] decomposed in E.

R_Ee [3 x 3 array] rotation matrix defining the axes of the coordinate frame E.

Returns

latitude, longitude: real scalars or vectors of length n. Geodetic latitude and longitude given in [rad]

See also:

[lat_lon2n_E](#)

1.13.1.1.3 nvector_core.n_EB_E2p_EB_E

n_EB_E2p_EB_E (*n_EB_E*, *depth*=0, *a*=6378137, *f*=0.0033528106647474805, *R_Ee*=None)

Converts n-vector to Cartesian position vector in meters.

Parameters

n_EB_E: 3 x n array

n-vector(s) [no unit] of position B, decomposed in E.

depth: 1 x n array Depth(s) [m] of system B, relative to the ellipsoid (depth = -height)

a: real scalar, default WGS-84 ellipsoid. Semi-major axis of the Earth ellipsoid given in [m].

f: real scalar, default WGS-84 ellipsoid. Flattening [no unit] of the Earth ellipsoid. If f==0 then spherical Earth with radius a is used in stead of WGS-84.

R_Ee [3 x 3 array] rotation matrix defining the axes of the coordinate frame E.

Returns

p_EB_E: 3 x n array Cartesian position vector(s) from E to B, decomposed in E.

Notes

The position of B (typically body) relative to E (typically Earth) is given into this function as n-vector, *n_EB_E*. The function converts to cartesian position vector (“ECEF-vector”), *p_EB_E*, in meters. The calculation is exact, taking the ellipsity of the Earth into account. It is also non-singular as both n-vector and p-vector are non-singular (except for the center of the Earth). The default ellipsoid model used is WGS-84, but other ellipsoids/spheres might be specified.

1.13.1.1.4 nvector_core.p_EB_E2n_EB_E

p_EB_E2n_EB_E (*p_EB_E*, *a*=6378137, *f*=0.0033528106647474805, *R_Ee*=None)

Converts Cartesian position vector in meters to n-vector.

Parameters

p_EB_E: 3 x n array

Cartesian position vector(s) from E to B, decomposed in E.

a: real scalar, default WGS-84 ellipsoid. Semi-major axis of the Earth ellipsoid given in [m].

f: real scalar, default WGS-84 ellipsoid. Flattening [no unit] of the Earth ellipsoid. If *f*=0 then spherical Earth with radius *a* is used in stead of WGS-84.

R_Ee [3 x 3 array] rotation matrix defining the axes of the coordinate frame E.

Returns

n_EB_E: 3 x n array

n-vector(s) [no unit] of position B, decomposed in E.

depth: 1 x n array Depth(s) [m] of system B, relative to the ellipsoid (depth = -height)

Notes

The position of B (typically body) relative to E (typically Earth) is given into this function as cartesian position vector *p_EB_E*, in meters. ("ECEF-vector"). The function converts to n-vector, *n_EB_E* and its depth, *depth*. The calculation is exact, taking the ellipsity of the Earth into account. It is also non-singular as both n-vector and p-vector are non-singular (except for the center of the Earth). The default ellipsoid model used is WGS-84, but other ellipsoids/spheres might be specified.

1.13.1.1.5 nvector_core.n_EA_E_and_n_EB_E2p_AB_E

n_EA_E_and_n_EB_E2p_AB_E (*n_EA_E*, *n_EB_E*, *z_EA*=0, *z_EB*=0, *a*=6378137, *f*=0.0033528106647474805, *R_Ee*=None)

Return the delta vector from position A to B.

Parameters

n_EA_E, n_EB_E: 3 x n array

n-vector(s) [no unit] of position A and B, decomposed in E.

z_EA, z_EB: 1 x n array Depth(s) [m] of system A and B, relative to the ellipsoid. (*z_EA* = -height, *z_EB* = -height)

a: real scalar, default WGS-84 ellipsoid. Semi-major axis of the Earth ellipsoid given in [m].

f: real scalar, default WGS-84 ellipsoid. Flattening [no unit] of the Earth ellipsoid. If *f*=0 then spherical Earth with radius *a* is used in stead of WGS-84.

R_Ee [3 x 3 array] rotation matrix defining the axes of the coordinate frame E.

Returns

p_AB_E: 3 x n array Cartesian position vector(s) from A to B, decomposed in E.

Notes

The n-vectors for positions A (`n_EA_E`) and B (`n_EB_E`) are given. The output is the delta vector from A to B (`p_AB_E`). The calculation is exact, taking the ellipsity of the Earth into account. It is also non-singular as both n-vector and p-vector are non-singular (except for the center of the Earth). The default ellipsoid model used is WGS-84, but other ellipsoids/spheres might be specified.

1.13.1.1.6 `nvector_core.n_EA_E_and_p_AB_E2n_EB_E`

`n_EA_E_and_p_AB_E2n_EB_E` (`n_EA_E`, `p_AB_E`, `z_EA=0`, `a=6378137`,
`f=0.0033528106647474805`, `R_E=None`)

Return position B from position A and delta.

Parameters

`n_EA_E`: 3 x n array n-vector(s) [no unit] of position A, decomposed in E.

`p_AB_E`: 3 x n array Cartesian position vector(s) from A to B, decomposed in E.

`z_EA`: 1 x n array Depth(s) [m] of system A, relative to the ellipsoid. (`z_EA` = -height)

`a`: real scalar, default WGS-84 ellipsoid. Semi-major axis of the Earth ellipsoid given in [m].

`f`: real scalar, default WGS-84 ellipsoid. Flattening [no unit] of the Earth ellipsoid. If `f==0` then spherical Earth with radius `a` is used in stead of WGS-84.

`R_E` [3 x 3 array] rotation matrix defining the axes of the coordinate frame E.

Returns

`n_EB_E`: 3 x n array n-vector(s) [no unit] of position B, decomposed in E.

`z_EB`: 1 x n array Depth(s) [m] of system B, relative to the ellipsoid. (`z_EB` = -height)

See also:

[`n_EA_E_and_n_EB_E2p_AB_E`](#), [`p_EB_E2n_EB_E`](#), [`n_EB_E2p_EB_E`](#)

Notes

The n-vector for position A (`n_EA_E`) and the position-vector from position A to position B (`p_AB_E`) are given. The output is the n-vector of position B (`n_EB_E`) and depth of B (`z_EB`). The calculation is exact, taking the ellipsity of the Earth into account. It is also non-singular as both n-vector and p-vector are non-singular (except for the center of the Earth). The default ellipsoid model used is WGS-84, but other ellipsoids/spheres might be specified.

1.13.1.1.7 `nvector_core.n_EA_E_and_n_EB_E2azimuth`

`n_EA_E_and_n_EB_E2azimuth` (`n_EA_E`, `n_EB_E`, `a=6378137`, `f=0.0033528106647474805`,
`R_E=None`)

Return azimuth from A to B, relative to North:

Parameters

`n_EA_E`, `n_EB_E`: 3 x n array n-vector(s) [no unit] of position A and B, respectively, decomposed in E.

`a`: real scalar, default WGS-84 ellipsoid. Semi-major axis of the Earth ellipsoid given in [m].

`f`: real scalar, default WGS-84 ellipsoid. Flattening [no unit] of the Earth ellipsoid. If `f==0` then spherical Earth with radius `a` is used in stead of WGS-84.

R_Ee [3 x 3 array] rotation matrix defining the axes of the coordinate frame E.

Returns

azimuth: n array Angle [rad] the line makes with a meridian, taken clockwise from north.

1.13.1.1.8 nvector_core.n_EA_E_distance_and_azimuth2n_EB_E

n_EA_E_distance_and_azimuth2n_EB_E (*n_EA_E*, *distance_rad*, *azimuth*, *R_Ee=None*)

Return position B from azimuth and distance from position A

Parameters

n_EA_E: 3 x n array

n-vector(s) [no unit] of position A decomposed in E.

distance_rad: n, array great circle distance [rad] from position A to B

azimuth: n array Angle [rad] the line makes with a meridian, taken clockwise from north.

Returns

n_EB_E: 3 x n array n-vector(s) [no unit] of position B decomposed in E.

1.13.1.1.9 nvector_core.great_circle_distance

great_circle_distance (*n_EA_E*, *n_EB_E*, *radius=6371009.0*)

Return great circle distance between positions A and B

Parameters

n_EA_E, n_EB_E: 3 x n array

n-vector(s) [no unit] of position A and B, decomposed in E.

radius: real scalar radius of sphere.

Formulae is given by equation (16) in Gade (2010) and is well conditioned for all angles.

1.13.1.1.10 nvector_core.euclidean_distance

euclidean_distance (*n_EA_E*, *n_EB_E*, *radius=6371009.0*)

Return Euclidean distance between positions A and B

Parameters

n_EA_E, n_EB_E: 3 x n array

n-vector(s) [no unit] of position A and B, decomposed in E.

radius: real scalar radius of sphere.

1.13.1.1.11 nvector_core.cross_track_distance

cross_track_distance (*path, n_EB_E, method='greatcircle', radius=6371009.0*)

Return cross track distance between path A and position B.

Parameters

path: tuple of 2 n-vectors

2 n-vectors of positions defining path A, decomposed in E.

n_EB_E: 3 x m array n-vector(s) of position B to measure the cross track distance to.

method: string defining distance calculated. Options are: 'greatcircle' or 'euclidean'

radius: real scalar radius of sphere. (default 6371009.0)

Returns

distance [array of length max(n, m)] cross track distance(s)

1.13.1.1.12 nvector_core.closest_point_on_great_circle

closest_point_on_great_circle (*path, n_EB_E*)

Return closest point C on great circle path A to position B.

Parameters

path: tuple of 2 n-vectors of 3 x n arrays

2 n-vectors of positions defining path A, decomposed in E.

n_EB_E: 3 x m array n-vector(s) of position B to find the closest point to.

Returns

n_EC_E: 3 x max(m, n) array n-vector(s) of closest position C on great circle path A

1.13.1.1.13 nvector_core.intersect

intersect (*path_a, path_b*)

Return the intersection(s) between the great circles of the two paths

Parameters

path_a, path_b: tuple of 2 n-vectors defining path A and path B, respectively. Path A and B has shape 2 x 3 x n and 2 x 3 x m, respectively.

Returns

n_EC_E [array of shape 3 x max(n, m)] n-vector(s) [no unit] of position C decomposed in E. point(s) of intersection between paths.

1.13.1.1.14 nvector_core.mean_horizontal_position

mean_horizontal_position (*n_EB_E*)

Return the n-vector of the horizontal mean position.

Parameters

n_EB_E: 3 x n array n-vectors [no unit] of positions Bi, decomposed in E.

Returns

p_EM_E: 3 x 1 array n-vector [no unit] of the mean positions of all Bi, decomposed in E.

1.13.1.1.15 nvector_core.on_great_circle

on_great_circle (*path, n_EB_E, radius=6371009.0, rtol=1e-06, atol=1e-08*)

True if position B is on great circle through path A.

Parameters

path: tuple of 2 n-vectors

2 n-vectors of positions defining path A, decomposed in E.

n_EB_E: 3 x m array n-vector(s) of position B to check to.

radius: real scalar radius of sphere. (default 6371009.0)

rtol, atol: real scalars defining relative and absolute tolerance

Returns

on [bool array of length max(n, m)] True if position B is on great circle through path A.

1.13.1.1.16 nvector_core.on_great_circle_path

on_great_circle_path (*path, n_EB_E, radius=6371009.0, rtol=1e-06, atol=1e-08*)

True if position B is on great circle and between endpoints of path A.

Parameters

path: tuple of 2 n-vectors

2 n-vectors of positions defining path A, decomposed in E.

n_EB_E: 3 x m array n-vector(s) of position B to measure the cross track distance to.

radius: real scalar radius of sphere. (default 6371009.0)

rtol, atol: real scalars defining relative and absolute tolerance

Returns

on [bool array of length max(n, m)] True if position B is on great circle and between endpoints of path A.

1.13.1.2 Rotation matrices and angles

<i>E_rotation</i> ([axes])	Return rotation matrix R_Ee defining the axes of the coordinate frame E.
<i>n_E2R_EN</i> (n_E[, R_Ee])	Returns the rotation matrix R_EN from n-vector.
<i>n_E_and_wa2R_EL</i> (n_E, wander_azimuth[, R_Ee])	Returns rotation matrix R_EL from n-vector and wander azimuth angle.
<i>R_EL2n_E</i> (R_EL)	Returns n-vector from the rotation matrix R_EL.
<i>R_EN2n_E</i> (R_EN)	Returns n-vector from the rotation matrix R_EN.
<i>R2xyz</i> (R_AB)	Returns the angles about new axes in the xyz-order from a rotation matrix.
<i>R2zyx</i> (R_AB)	Returns the angles about new axes in the zxy-order from a rotation matrix.

Continued on next page

Table 2 – continued from previous page

<code>xyz2R(x, y, z)</code>	Returns rotation matrix from 3 angles about new axes in the xyz-order.
<code>zyx2R(z, y, x)</code>	Returns rotation matrix from 3 angles about new axes in the zyx-order.

1.13.1.2.1 nvector._core.E_rotation

E_rotation (*axes='e'*)

Return rotation matrix R_{Ee} defining the axes of the coordinate frame E.

Parameters

axes ['e' or 'E'] defines orientation of the axes of the coordinate frame E. Options are: 'e': z-axis points to the North Pole along the Earth's rotation axis,

x-axis points towards the point where latitude = longitude = 0. This choice is very common in many fields.

'E': x-axis points to the North Pole along the Earth's rotation axis, y-axis points towards longitude +90deg (east) and latitude = 0. (the yz-plane coincides with the equatorial plane). This choice of axis ensures that at zero latitude and longitude, frame N (North-East-Down) has the same orientation as frame E. If roll/pitch/yaw are zero, also frame B (forward-starboard-down) has this orientation. In this manner, the axes of frame E is chosen to correspond with the axes of frame N and B. The functions in this library originally used this option.

Returns

R_{Ee} [3 x 3 array] rotation matrix defining the axes of the coordinate frame E as described in Table 2 in Gade (2010)

R_{Ee} controls the axes of the coordinate frame E (Earth-Centred, Earth-Fixed, ECEF) used by the other functions in this library

Examples

```
>>> import numpy as np
>>> import nvector as nv
>>> np.allclose(nv.E_rotation(axes='e'), [[ 0, 0, 1],
...                                     [ 0, 1, 0],
...                                     [-1, 0, 0]])
True
>>> np.allclose(nv.E_rotation(axes='E'), [[ 1., 0., 0.],
...                                     [ 0., 1., 0.],
...                                     [ 0., 0., 1.]])
True
```

1.13.1.2.2 nvector._core.n_E2R_EN

n_E2R_EN (*n_E, R_Ee=None*)

Returns the rotation matrix R_{EN} from n-vector.

Parameters

n_E : 3 x n array n-vector [no unit] decomposed in E

R_{Ee} [3 x 3 array] rotation matrix defining the axes of the coordinate frame E.

Returns

R_EN: 3 x 3 x n array The resulting rotation matrix [no unit] (direction cosine matrix).

See also:

[*R_EN2n_E, n_E_and_wa2R_EL, R_EL2n_E*](#)

1.13.1.2.3 nvector_core.n_E_and_wa2R_EL

n_E_and_wa2R_EL (*n_E, wander_azimuth, R_Ee=None*)

Returns rotation matrix R_EL from n-vector and wander azimuth angle.

R_EL = n_E_and_wa2R_EL(n_E, wander_azimuth) Calculates the rotation matrix (direction cosine matrix) R_EL using n-vector (n_E) and the wander azimuth angle. When wander_azimuth=0, we have that N=L (See Table 2 in Gade (2010) for details)

Parameters

n_E: 3 x n array n-vector [no unit] decomposed in E

wander_azimuth: real scalar or array of length n Angle [rad] between L's x-axis and north, positive about L's z-axis.

R_Ee [3 x 3 array] rotation matrix defining the axes of the coordinate frame E.

Returns

R_EL: 3 x 3 x n array The resulting rotation matrix. [no unit]

See also:

[*R_EL2n_E, R_EN2n_E, n_E2R_EN*](#)

1.13.1.2.4 nvector_core.R_EL2n_E

R_EL2n_E (*R_EL*)

Returns n-vector from the rotation matrix R_EL.

Parameters

R_EL: 3 x 3 x n array Rotation matrix (direction cosine matrix) [no unit]

Returns

n_E: 3 x n array n-vector(s) [no unit] decomposed in E.

See also:

[*R_EN2n_E, n_E_and_wa2R_EL, n_E2R_EN*](#)

1.13.1.2.5 nvector_core.R_EN2n_E

R_EN2n_E (*R_EN*)

Returns n-vector from the rotation matrix R_EN.

Parameters

R_EN: 3 x 3 x n array Rotation matrix (direction cosine matrix) [no unit]

Returns

n_E: 3 x n array n-vector [no unit] decomposed in E.

See also:

[*n_E2R_EN, R_EL2n_E, n_E_and_wa2R_EL*](#)

1.13.1.2.6 nvector_core.R2xyz

R2xyz (*R_AB*)

Returns the angles about new axes in the xyz-order from a rotation matrix.

Parameters

R_AB: 3 x 3 x n array rotation matrix [no unit] (direction cosine matrix) such that the relation between a vector *v* decomposed in A and B is given by: $v_A = \text{mdot}(R_{AB}, v_B)$

Returns

x, y, z: real scalars or array of length n. Angles [rad] of rotation about new axes.

See also:

[*xyz2R*](#), [*R2zyx*](#), [*xyz2R*](#)

Notes

The x, y, z angles are called Euler angles or Tait-Bryan angles and are defined by the following procedure of successive rotations: Given two arbitrary coordinate frames A and B. Consider a temporary frame T that initially coincides with A. In order to make T align with B, we first rotate T an angle x about its x-axis (common axis for both A and T). Secondly, T is rotated an angle y about the NEW y-axis of T. Finally, T is rotated an angle z about its NEWEST z-axis. The final orientation of T now coincides with the orientation of B.

The signs of the angles are given by the directions of the axes and the right hand rule.

1.13.1.2.7 nvector_core.R2zyx

R2zyx (*R_AB*)

Returns the angles about new axes in the zxy-order from a rotation matrix.

Parameters

R_AB: 3x3 array rotation matrix [no unit] (direction cosine matrix) such that the relation between a vector *v* decomposed in A and B is given by: $v_A = \text{np.dot}(R_{AB}, v_B)$

Returns

z, y, x: real scalars Angles [rad] of rotation about new axes.

See also:

[*zyx2R*](#), [*xyz2R*](#), [*R2xyz*](#)

Notes

The z, x, y angles are called Euler angles or Tait-Bryan angles and are defined by the following procedure of successive rotations: Given two arbitrary coordinate frames A and B. Consider a temporary frame T that initially coincides with A. In order to make T align with B, we first rotate T an angle z about its z-axis (common axis for both A and T). Secondly, T is rotated an angle y about the NEW y-axis of T. Finally, T is rotated an angle x about its NEWEST x-axis. The final orientation of T now coincides with the orientation of B.

The signs of the angles are given by the directions of the axes and the right hand rule.

Note that if A is a north-east-down frame and B is a body frame, we have that z=yaw, y=pitch and x=roll.

1.13.1.2.8 nvector._core.xyz2R

xyz2R (*x*, *y*, *z*)

Returns rotation matrix from 3 angles about new axes in the xyz-order.

Parameters

x,y,z: real scalars or array of lengths *n* Angles [rad] of rotation about new axes.

Returns

R_AB: 3 x 3 x *n* array rotation matrix [no unit] (direction cosine matrix) such that the relation between a vector *v* decomposed in A and B is given by: $v_A = \text{mdot}(R_{AB}, v_B)$

See also:

[R2xyz](#), [zyx2R](#), [R2zyx](#)

Notes

The rotation matrix *R_AB* is created based on 3 angles *x,y,z* about new axes (intrinsic) in the order x-y-z. The angles are called Euler angles or Tait-Bryan angles and are defined by the following procedure of successive rotations: Given two arbitrary coordinate frames A and B. Consider a temporary frame T that initially coincides with A. In order to make T align with B, we first rotate T an angle *x* about its x-axis (common axis for both A and T). Secondly, T is rotated an angle *y* about the NEW y-axis of T. Finally, T is rotated an angle *z* about its NEWEST z-axis. The final orientation of T now coincides with the orientation of B.

The signs of the angles are given by the directions of the axes and the right hand rule.

1.13.1.2.9 nvector._core.zyx2R

zyx2R (*z*, *y*, *x*)

Returns rotation matrix from 3 angles about new axes in the zyx-order.

Parameters

z, y, x: real scalars or arrays of lengths *n* Angles [rad] of rotation about new axes.

Returns

R_AB: 3 x 3 x *n* array rotation matrix [no unit] (direction cosine matrix) such that the relation between a vector *v* decomposed in A and B is given by: $v_A = \text{mdot}(R_{AB}, v_B)$

See also:

[R2zyx](#), [xyz2R](#), [R2xyz](#)

Notes

The rotation matrix *R_AB* is created based on 3 angles *z,y,x* about new axes (intrinsic) in the order z-y-x. The angles are called Euler angles or Tait-Bryan angles and are defined by the following procedure of successive rotations: Given two arbitrary coordinate frames A and B. Consider a temporary frame T that initially coincides with A. In order to make T align with B, we first rotate T an angle *z* about its z-axis (common axis for both A and T). Secondly, T is rotated an angle *y* about the NEW y-axis of T. Finally, T is rotated an angle *x* about its NEWEST x-axis. The final orientation of T now coincides with the orientation of B.

The signs of the angles are given by the directions of the axes and the right hand rule.

Note that if A is a north-east-down frame and B is a body frame, we have that z=yaw, y=pitch and x=roll.

1.13.1.3 Misc functions

<code>nthroot(x, n)</code>	Return the n'th root of x to machine precision
<code>deg(rad_angle)</code>	Converts angle in radians to degrees.
<code>rad(deg_angle)</code>	Converts angle in degrees to radians.
<code>select_ellipsoid(name)</code>	Return semi-major axis (a), flattening (f) and name of ellipsoid
<code>unit(vector[, norm_zero_vector])</code>	Convert input vector to a vector of unit length.

1.13.1.3.1 nvector._core.nthroot

nthroot (*x*, *n*)

Return the n'th root of x to machine precision

Parameters x, n

Examples

```
>>> import numpy as np
>>> import nvector as nv
>>> np.allclose(nv.nthroot(27.0, 3), 3.0)
True
```

1.13.1.3.2 nvector._core.deg

deg (*rad_angle*)

Converts angle in radians to degrees.

Parameters

rad_angle: angle in radians

Returns

deg_angle: angle in degrees

See also:

[*rad*](#)

1.13.1.3.3 nvector._core.rad

rad (*deg_angle*)

Converts angle in degrees to radians.

Parameters

deg_angle: angle in degrees

Returns

rad_angle: angle in radians

See also:

[*deg*](#)

1.13.1.3.4 nvector._core.select_ellipsoid

select_ellipsoid (*name*)

Return semi-major axis (a), flattening (f) and name of ellipsoid

Parameters

name [string] name of ellipsoid. Valid options are: 1) Airy 1858 2) Airy Modified 3) Australian National 4) Bessel 1841 5) Clarke 1880 6) Everest 1830 7) Everest Modified 8) Fisher 1960 9) Fisher 1968 10) Hough 1956 11) International (Hayford)/European Datum (ED50) 12) Krassovsky 1938 13) NWL-9D (WGS 66) 14) South American 1969 15) Soviet Geod. System 1985 16) WGS 72 17) Clarke 1866 (NAD27) 18) GRS80 / WGS84 (NAD83) 19) ETRS89

Examples

```
>>> import nvector as nv
>>> nv.select_ellipsoid(name='wgs84')
(6378137.0, 0.0033528106647474805, 'GRS80 / WGS84 (NAD83)')
>>> nv.select_ellipsoid(name='GRS80')
(6378137.0, 0.0033528106647474805, 'GRS80 / WGS84 (NAD83)')
>>> nv.select_ellipsoid(name='NAD83')
(6378137.0, 0.0033528106647474805, 'GRS80 / WGS84 (NAD83)')
>>> nv.select_ellipsoid(name=18)
(6378137.0, 0.0033528106647474805, 'GRS80 / WGS84 (NAD83)')
```

1.13.1.3.5 nvector._core.unit

unit (*vector*, *norm_zero_vector=1*)

Convert input vector to a vector of unit length.

Parameters

vector [3 x m array] m column vectors

Returns

unitvector [3 x m array] normalized unitvector(s) along axis==0.

Notes

The column vector(s) that have zero length will be returned as unit vector(s) pointing in the x-direction, i.e, [[1], [0], [0]]

Examples

```
>>> import numpy as np
>>> import nvector as nv
>>> np.allclose(nv.unit([[1, 0], [1, 0], [1, 0]]), [[ 0.57735027, 1],
...                                                [ 0.57735027, 0],
...                                                [ 0.57735027, 0]])
True
```

1.13.1.4 OO interface to Geodesic functions

<code>FrameE([a, f, name, axes])</code>	Earth-fixed frame
<code>FrameN(position)</code>	North-East-Down frame
<code>FrameL(position[, wander_azimuth])</code>	Local level, Wander azimuth frame
<code>FrameB(position[, yaw, pitch, roll, degrees])</code>	Body frame
<code>ECEFvector(pvector[, frame])</code>	Geographical position given as Cartesian position vector in frame E
<code>GeoPoint(latitude, longitude[, z, frame, ...])</code>	Geographical position given as latitude, longitude, depth in frame E
<code>Nvector(normal[, z, frame])</code>	Geographical position given as n-vector and depth in frame E
<code>GeoPath(positionA, positionB)</code>	Geographical path between two positions in Frame E
<code>Pvector(pvector, frame)</code>	Cartesian position vector in another frame
<code>diff_positions(*args, **kwargs)</code>	<code>diff_positions</code> is deprecated!

1.13.1.4.1 nvector.objects.FrameE

class FrameE (*a=None, f=None, name='WGS84', axes='e'*)
Earth-fixed frame

Parameters

a: real scalar, default WGS-84 ellipsoid. Semi-major axis of the Earth ellipsoid given in [m].

f: real scalar, default WGS-84 ellipsoid. Flattening [no unit] of the Earth ellipsoid. If `f==0` then spherical Earth with radius `a` is used in stead of WGS-84.

name: string defining the default ellipsoid.

axes: 'e' or 'E' defines axes orientation of E frame. Default is `axes='e'` which means that the orientation of the axis is such that: z-axis -> North Pole, x-axis -> Latitude=Longitude=0.

See also:

[`FrameN`](#), [`FrameL`](#), [`FrameB`](#)

Notes

The frame is Earth-fixed (rotates and moves with the Earth) where the origin coincides with Earth's centre (geometrical centre of ellipsoid model).

`__init__(self, a=None, f=None, name='WGS84', axes='e')`
`x.__init__(...)` initializes `x`; see `help(type(x))` for signature

Methods

<code>ECEFvector(self, *args, **kwargs)</code>	Geographical position given as Cartesian position vector in frame E
<code>GeoPoint(self, *args, **kwargs)</code>	Geographical position given as latitude, longitude, depth in frame E
<code>Nvector(self, *args, **kwargs)</code>	Geographical position given as n-vector and depth in frame E
<code>__init__(self[, a, f, name, axes])</code>	<code>x.__init__(...)</code> initializes <code>x</code> ; see <code>help(type(x))</code> for signature
<code>direct(self, lat_a, lon_a, azimuth, distance)</code>	Return position B computed from position A, distance and azimuth.

Continued on next page

Table 5 – continued from previous page

<code>inverse(self, lat_a, lon_a, lat_b, lon_b, ...)</code>	Return ellipsoidal distance between positions as well as the direction.
---	---

1.13.1.4.2 nvector.objects.FrameN

class **FrameN** (*position*)

North-East-Down frame

Parameters

position: **ECEFvector**, **GeoPoint** or **Nvector object** position of the vehicle (B) which also defines the origin of the local frame N. The origin is directly beneath or above the vehicle (B), at Earth’s surface (surface of ellipsoid model).

Notes

The Cartesian frame is local and oriented North-East-Down, i.e., the x-axis points towards north, the y-axis points towards east (both are horizontal), and the z-axis is pointing down.

When moving relative to the Earth, the frame rotates about its z-axis to allow the x-axis to always point towards north. When getting close to the poles this rotation rate will increase, being infinite at the poles. The poles are thus singularities and the direction of the x- and y-axes are not defined here. Hence, this coordinate frame is NOT SUITABLE for general calculations.

`__init__(self, position)`

x.`__init__`(...) initializes x; see `help(type(x))` for signature

Methods

<code>Pvector(self, pvector)</code>	
<code>__init__(self, position)</code>	x. <code>__init__</code> (...) initializes x; see <code>help(type(x))</code> for signature

Attributes

<code>R_EN</code>

1.13.1.4.3 nvector.objects.FrameL

class **FrameL** (*position, wander_azimuth=0*)

Local level, Wander azimuth frame

Parameters

position: **ECEFvector**, **GeoPoint** or **Nvector object** position of the vehicle (B) which also defines the origin of the local frame L. The origin is directly beneath or above the vehicle (B), at Earth’s surface (surface of ellipsoid model).

wander_azimuth: **real scalar** Angle [rad] between the x-axis of L and the north direction.

See also:

[*FrameE*](#), [*FrameN*](#), [*FrameB*](#)

Notes

The Cartesian frame is local and oriented Wander-azimuth-Down. This means that the z-axis is pointing down. Initially, the x-axis points towards north, and the y-axis points towards east, but as the vehicle moves they are not rotating about the z-axis (their angular velocity relative to the Earth has zero component along the z-axis).

(Note: Any initial horizontal direction of the x- and y-axes is valid for L, but if the initial position is outside the poles, north and east are usually chosen for convenience.)

The L-frame is equal to the N-frame except for the rotation about the z-axis, which is always zero for this frame (relative to E). Hence, at a given time, the only difference between the frames is an angle between the x-axis of L and the north direction; this angle is called the wander azimuth angle. The L-frame is well suited for general calculations, as it is non-singular.

```
__init__(self, position, wander_azimuth=0)
    x.__init__(...) initializes x; see help(type(x)) for signature
```

Methods

<code>Pvector(self, pvector)</code>	
<code>__init__(self, position[, wander_azimuth])</code>	<code>x.__init__(...)</code> initializes x; see <code>help(type(x))</code> for signature

Attributes

<code>R_EN</code>

1.13.1.4.4 nvector.objects.FrameB

```
class FrameB(position, yaw=0, pitch=0, roll=0, degrees=False)
```

Body frame

Parameters

position: ECEFvector, GeoPoint or Nvector object

position of the vehicle's reference point which also coincides with the origin of the frame B.

yaw, pitch, roll: real scalars defining the orientation of frame B in [deg] or [rad].

degrees [bool] if True yaw, pitch, roll are given in degrees otherwise in radians

Notes

The frame is fixed to the vehicle where the x-axis points forward, the y-axis to the right (starboard) and the z-axis in the vehicle's down direction.

```
__init__(self, position, yaw=0, pitch=0, roll=0, degrees=False)
    x.__init__(...) initializes x; see help(type(x)) for signature
```

Methods

<code>Pvector(self, pvector)</code>	
<code>__init__(self, position[, yaw, pitch, roll, ...])</code>	<code>x.__init__(...)</code> initializes x; see <code>help(type(x))</code> for signature

Attributes

<code>R_EN</code>

1.13.1.4.5 nvector.objects.ECEFvector

class ECEFvector (*pvector, frame=None*)

Geographical position given as Cartesian position vector in frame E

Parameters

pvector: 3 x n array

Cartesian position vector(s) [m] from E to B, decomposed in E.

frame: **FrameE** object reference ellipsoid. The default ellipsoid model used is WGS84, but other ellipsoids/spheres might be specified.

Notes

The position of B (typically body) relative to E (typically Earth) is given into this function as p-vector, `p_EB_E` relative to the center of the frame.

`__init__(self, pvector, frame=None)`
`x.__init__(...)` initializes x; see `help(type(x))` for signature

Methods

<code>__init__(self, pvector[, frame])</code>	<code>x.__init__(...)</code> initializes x; see <code>help(type(x))</code> for signature
<code>change_frame(self, frame)</code>	Converts to Cartesian position vector in another frame
<code>delta_to(self, other)</code>	Return cartesian delta vector from positions A to B decomposed in N.
<code>to_ecef_vector(self)</code>	
<code>to_geo_point(self)</code>	Converts ECEF-vector to geo-point.
<code>to_nvector(self)</code>	Converts ECEF-vector to n-vector.

Attributes

<code>azimuth</code>
<code>azimuth_deg</code>
<code>elevation</code>
<code>elevation_deg</code>
<code>length</code>

1.13.1.4.6 nvector.objects.GeoPoint

class GeoPoint (*latitude, longitude, z=0, frame=None, degrees=False*)

Geographical position given as latitude, longitude, depth in frame E

Parameters

latitude, longitude: real scalars or vectors of length **n**. Geodetic latitude and longitude given in [rad or deg]

z: real scalar or vector of length **n**. Depth(s) [m] relative to the ellipsoid (depth = -height)

frame: **FrameE** object reference ellipsoid. The default ellipsoid model used is WGS84, but other ellipsoids/spheres might be specified.

degrees: **bool** True if input are given in degrees otherwise radians are assumed.

Examples

Solve geodesic problems.

The following illustrates its use

```
>>> import nvector as nv
>>> wgs84 = nv.FrameE(name='WGS84')
```

The geodesic inverse problem

```
>>> positionA = wgs84.GeoPoint(-41.32, 174.81, degrees=True)
>>> positionB = wgs84.GeoPoint(40.96, -5.50, degrees=True)
>>> s12, az1, az2 = positionA.distance_and_azimuth(positionB, degrees=True)
>>> 's12 = {:.2f}, az1 = {:.2f}, az2 = {:.2f}'.format(s12, az1, az2)
's12 = 19959679.27, az1 = 161.07, az2 = 18.83'
```

The geodesic direct problem

```
>>> positionA = wgs84.GeoPoint(40.6, -73.8, degrees=True)
>>> az1, distance = 45, 10000e3
>>> positionB, az2 = positionA.displace(distance, az1, degrees=True)
>>> lat2, lon2 = positionB.latitude_deg, positionB.longitude_deg
>>> msg = 'lat2 = {:.2f}, lon2 = {:.2f}, az2 = {:.2f}'
>>> msg.format(lat2, lon2, az2)
'lat2 = 32.64, lon2 = 49.01, az2 = 140.37'
```

__init__ (*self, latitude, longitude, z=0, frame=None, degrees=False*)

x.__init__(...) initializes x; see help(type(x)) for signature

Methods

<code>__init__(self, latitude, longitude[, z, ...])</code>	<code>x.__init__</code> (...) initializes x; see help(type(x)) for signature
<code>delta_to(self, other)</code>	Return cartesian delta vector from positions A to B decomposed in N.
<code>displace(self, distance, azimuth[, ...])</code>	Return position B computed from current position, distance and azimuth.
<code>distance_and_azimuth(self, point[, ...])</code>	Return ellipsoidal distance between positions as well as the direction.
<code>to_ecef_vector(self)</code>	Converts latitude and longitude to ECEF-vector.
<code>to_geo_point(self)</code>	Return geo-point

Continued on next page

Table 14 – continued from previous page

<code>to_nvector(self)</code>	Converts latitude and longitude to n-vector.
-------------------------------	--

Attributes

<code>latitude_deg</code>
<code>latlon</code>
<code>latlon_deg</code>
<code>longitude_deg</code>

1.13.1.4.7 nvector.objects.Nvector

class Nvector (*normal, z=0, frame=None*)

Geographical position given as n-vector and depth in frame E

Parameters

normal: 3 x n array n-vector(s) [no unit] decomposed in E.

z: real scalar or vector of length n. Depth(s) [m] relative to the ellipsoid (depth = -height)

frame: FrameE object reference ellipsoid. The default ellipsoid model used is WGS84, but other ellipsoids/spheres might be specified.

See also:

GeoPoint, ECEFvector, Pvector

Notes

The position of B (typically body) relative to E (typically Earth) is given into this function as n-vector, `n_EB_E` and a depth, `z` relative to the ellipsoid.

`__init__(self, normal, z=0, frame=None)`

`x.__init__(...)` initializes x; see `help(type(x))` for signature

Methods

<code>__init__(self, normal[, z, frame])</code>	<code>x.__init__(...)</code> initializes x; see <code>help(type(x))</code> for signature
<code>delta_to(self, other)</code>	Return cartesian delta vector from positions A to B decomposed in N.
<code>mean(self)</code>	Return mean position of the n-vectors.
<code>mean_horizontal_position(*args, **kws)</code>	<i>mean_horizontal_position</i> is deprecated!
<code>to_ecef_vector(self)</code>	Converts n-vector to Cartesian position vector (“ECEF-vector”)
<code>to_geo_point(self)</code>	Converts n-vector to geo-point.
<code>to_nvector(self)</code>	
<code>unit(self)</code>	Normalizes self to unit vector(s)

1.13.1.4.8 nvector.objects.GeoPath

class GeoPath (*positionA, positionB*)

Geographical path between two positions in Frame E

Parameters

positionA, positionB: Nvector, GeoPoint or ECEFvector objects The path is defined by the line between position A and B, decomposed in E.

`__init__(self, positionA, positionB)`
`x.__init__(...)` initializes x; see `help(type(x))` for signature

Methods

<code>__init__(self, positionA, positionB)</code>	<code>x.__init__(...)</code> initializes x; see <code>help(type(x))</code> for signature
<code>closest_point_on_great_circle(self, point)</code>	
<code>closest_point_on_path(self, point)</code>	Returns closest point on great circle path segment to the point.
<code>cross_track_distance(self, point[, method, ...])</code>	Return cross track distance from path to point.
<code>ecef_vectors(self)</code>	Return positionA and positionB as ECEF-vectors
<code>geo_points(self)</code>	Return positionA and positionB as geo-points
<code>interpolate(self, ti)</code>	Return the interpolated point along the path
<code>intersect(self, path)</code>	Return the intersection(s) between the great circles of the two paths
<code>intersection(*args, **kwargs)</code>	<i>intersection</i> is deprecated!
<code>nvector_normals(self)</code>	
<code>nvectors(self)</code>	Return positionA and positionB as n-vectors
<code>on_great_circle(self, point[, rtol, atol])</code>	
<code>on_path(self, point[, method, rtol, atol])</code>	Return True if point is on the path between A and B
<code>track_distance(self[, method, radius])</code>	Return the distance of the path.

1.13.1.4.9 nvector.objects.Pvector

class Pvector (*pvector, frame*)
Cartesian position vector in another frame

`__init__(self, pvector, frame)`
`x.__init__(...)` initializes x; see `help(type(x))` for signature

Methods

<code>__init__(self, pvector, frame)</code>	<code>x.__init__(...)</code> initializes x; see <code>help(type(x))</code> for signature
<code>delta_to(self, other)</code>	Return cartesian delta vector from positions A to B decomposed in N.
<code>to_ecef_vector(self)</code>	
<code>to_geo_point(self)</code>	
<code>to_nvector(self)</code>	

Attributes

<code>azimuth</code>	
<code>azimuth_deg</code>	

Continued on next page

Table 19 – continued from previous page

elevation
elevation_deg
length

1.13.1.4.10 nvector.objects.diff_positions

diff_positions (*args, **kws)

diff_positions is deprecated!

Deprecated use delta_E instead.

CHAPTER 2

Indices and tables

- `genindex`
- `modindex`
- `search`

n

`nvector`, [26](#)

`nvector._info`, [3](#)

`nvector._info_functional`, [12](#)

Symbols

`__init__()` (*ECEFvector method*), 42
`__init__()` (*FrameB method*), 41
`__init__()` (*FrameE method*), 39
`__init__()` (*FrameL method*), 41
`__init__()` (*FrameN method*), 40
`__init__()` (*GeoPath method*), 45
`__init__()` (*GeoPoint method*), 43
`__init__()` (*Nvector method*), 44
`__init__()` (*Pvector method*), 45

C

`closest_point_on_great_circle()` (*in module nvector_core*), 31
`cross_track_distance()` (*in module nvector_core*), 31

D

`deg()` (*in module nvector_core*), 37
`diff_positions()` (*in module nvector_objects*), 46

E

`E_rotation()` (*in module nvector_core*), 33
`ECEFvector` (*class in nvector_objects*), 42
`euclidean_distance()` (*in module nvector_core*), 30

F

`FrameB` (*class in nvector_objects*), 41
`FrameE` (*class in nvector_objects*), 39
`FrameL` (*class in nvector_objects*), 40
`FrameN` (*class in nvector_objects*), 40

G

`GeoPath` (*class in nvector_objects*), 44
`GeoPoint` (*class in nvector_objects*), 43
`great_circle_distance()` (*in module nvector_core*), 30

I

`intersect()` (*in module nvector_core*), 31

L

`lat_lon2n_E()` (*in module nvector_core*), 26

M

`mean_horizontal_position()` (*in module nvector_core*), 31

N

`n_E2lat_lon()` (*in module nvector_core*), 27
`n_E2R_EN()` (*in module nvector_core*), 33
`n_E_and_wa2R_EL()` (*in module nvector_core*), 34
`n_EA_E_and_n_EB_E2azimuth()` (*in module nvector_core*), 29
`n_EA_E_and_n_EB_E2p_AB_E()` (*in module nvector_core*), 28
`n_EA_E_and_p_AB_E2n_EB_E()` (*in module nvector_core*), 29
`n_EA_E_distance_and_azimuth2n_EB_E()` (*in module nvector_core*), 30
`n_EB_E2p_EB_E()` (*in module nvector_core*), 27
`nthroot()` (*in module nvector_core*), 37
`Nvector` (*class in nvector_objects*), 44
`nvector` (*module*), 26
`nvector._info` (*module*), 3
`nvector._info_functional` (*module*), 12

O

`on_great_circle()` (*in module nvector_core*), 32
`on_great_circle_path()` (*in module nvector_core*), 32

P

`p_EB_E2n_EB_E()` (*in module nvector_core*), 28
`Pvector` (*class in nvector_objects*), 45

R

`R2xyz()` (*in module nvector_core*), 35
`R2zyx()` (*in module nvector_core*), 35
`R_EL2n_E()` (*in module nvector_core*), 34
`R_EN2n_E()` (*in module nvector_core*), 34
`rad()` (*in module nvector_core*), 37

S

`select_ellipsoid()` (*in module nvector_core*),
[38](#)

U

`unit()` (*in module nvector_core*), [38](#)

X

`xyz2R()` (*in module nvector_core*), [36](#)

Z

`zyx2R()` (*in module nvector_core*), [36](#)